


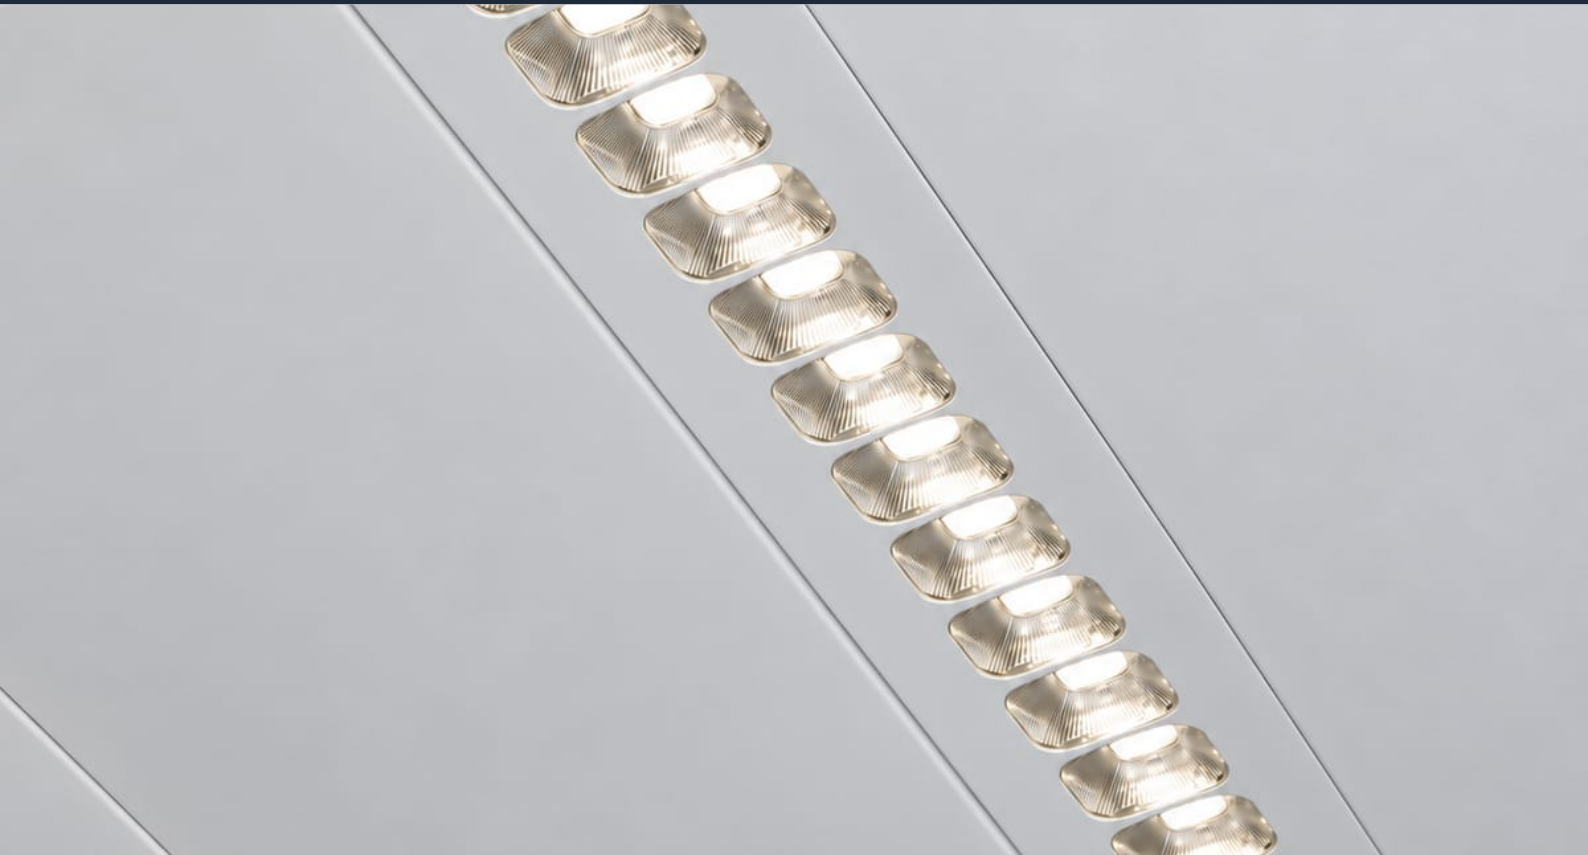

ATOLUX

# Metronome-K

Linear LED luminaire for climate ceilings, fitted with 20, 28 or 36 recessed lenses behind a louvre grille.

## CATEGORY

**Climate ceiling luminaires**

## MOUNTING

**Inleg**

## IP CLASS

**IP20 (boven) / IP20 (onder)**

## COLOUR TEMPERATURE

**2700K, 3000K, 4000K, Tunable  
white, op aanvraag**

## CRI

**CRI80, CRI90**

## UGR

**<19**

## Introduction

Linear LED luminaire for climate ceilings, fitted with 20, 28 or 36 recessed lenses behind a louvre grille.

With the Avion-K, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

## Technical specifications

|                        |                                                           |
|------------------------|-----------------------------------------------------------|
| Mounting               | Inleg                                                     |
| Application            | Kantoren, Zorg, Education, Public spaces, Vrijtjidssector |
| Dimensions             | On request                                                |
| Material               | Staal (behuizing)                                         |
| Optics                 | Lens met Louver                                           |
| UGR                    | <19                                                       |
| IP class               | IP20 (boven) / IP20 (onder)                               |
| CRI                    | CRI80, CRI90                                              |
| CCT                    | 2700K, 3000K, 4000K, Tunable white, On request            |
| Control                | aan/uit, DALI-2, 1-10v, Casambi, On request               |
| Emergency lighting     | 1-hour emergency power, 1 uur autonomie autotest          |
| Voltage / freq.        | 220-240V, 50 / 60Hz                                       |
| Photobiological safety | IEC 62471: RG1 (low risk)                                 |
| Insulation class       | Class II                                                  |
| Power factor           | >0.9                                                      |
| Ambient temperature    | -20°C / +40°C                                             |
| Colour                 | RAL9016, RAL9005, On request                              |
| Brand                  | Atolux                                                    |
| Category               | Climate ceiling luminaires                                |

## Product photos

Atmosphere and product images



## Specification text

Avion-K is a rectangular LED luminaire for climate ceilings with a lens-and-louver optic and low glare (UGR <19).

## Information

### Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

---

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 29 September 2026