


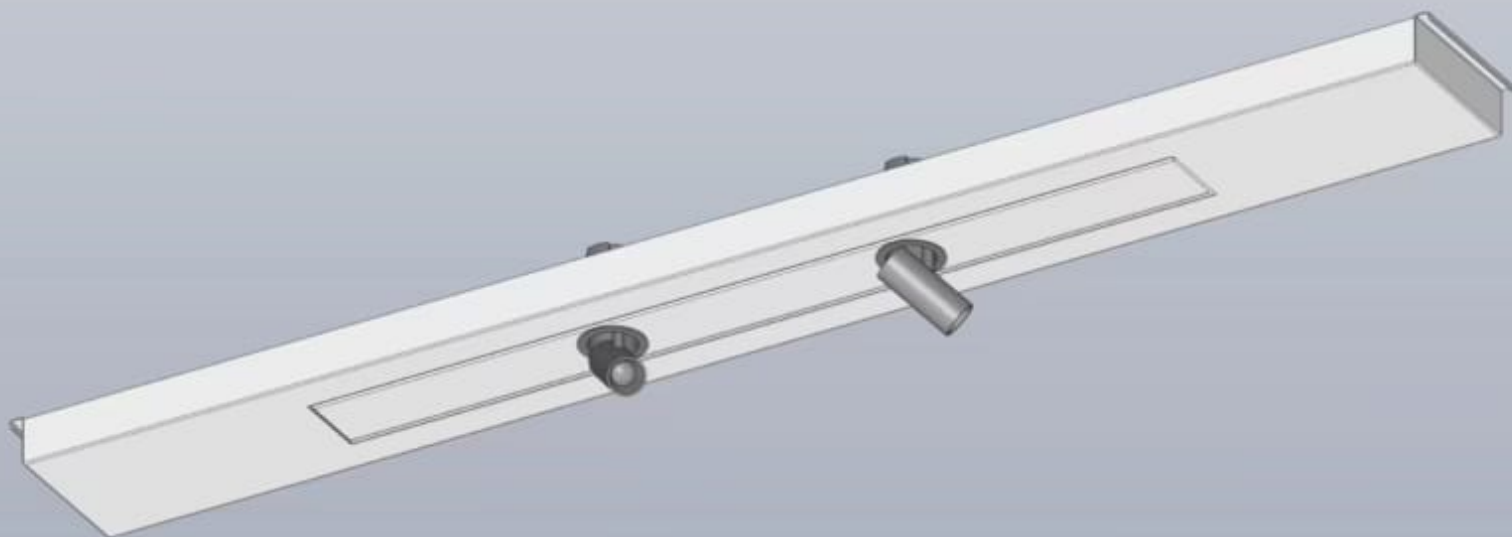

ATOLUX

Duo-spot module

The Duo-spot module is a rectangular panel fitted with two adjustable LED spots. The spots can be aimed individually. When a spot is aimed downward, it can als...

CATEGORY

Refurbishment armaturen

MOUNTING

Recessed

IP CLASS

IP20 (boven) / IP20 (onder)

COLOUR TEMPERATURE

3000K, 4000K

CRI

CRI90

Introduction

The Duo-spot module is a rectangular panel fitted with two adjustable LED spots. The spots can be aimed individually. When a spot is aimed downward, it can als...


With the Oxo-RF Refurbishment, you choose architectural lighting that unites design and light quality. Designed for kantoren, musea, public spaces, vrijetijdssector, retail, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Technical specifications

Mounting	Recessed
Application	Kantoren, Musea, Public spaces, Vrijetijdssector, Retail
Dimensions	On request
Material	Aluminium (behuizing)
Optics	Lens
IP class	IP20 (boven) / IP20 (onder)
CRI	CRI90
CCT	3000K, 4000K
Control	aan/uit, DALI-2, 1-10v, Casambi, On request
Emergency lighting	1-hour emergency power, Optional, Optional 1-hour autonomy self-test
Voltage / freq.	220-240V, 50 / 60Hz
Efficiency	>140lm/W, >70lm/W
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class II
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Colour	RAL9016, RAL9005, On request
Options	220-240V, 50 / 60Hz, 93 100 100 100 100, BST 14i2, Europlug, GST18i3, GST18i5 pastelblauw, L90B50@60, 000h (Tq 25°C), Remote driver, Downward, On request, On the driver, Optional, Rectangular, Adjustable, SDCM=2
Brand	Atolux
Category	Refurbishment armaturen

Product photos

Atmosphere and product images

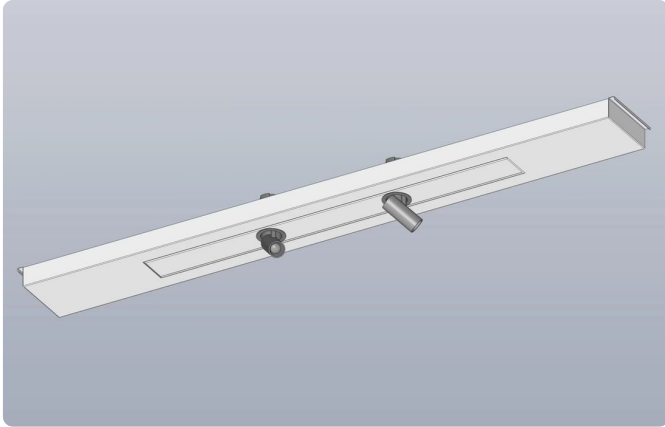

Specification text

Oxo-RF Refurbishment is a refurbishment and retrofit luminaire from the Oxo range by Atolux. The luminaire is recessed, fully adjustable and fitted with Lens. The range is intended for offices, museums, public spaces, leisure venues and retail.

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information held in the Atomis luminaire database. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 11 September 2026