

ATOMIS

Evolo-S white

Evolo-S white is an elegant, slim LED pendant luminaire fitted with a row of mid-power LEDs, each with an individual lens and louvre.

CATEGORY

Pendant luminaires

MOUNTING

Steel-wire suspension

IP CLASS

IP20 (naar boven)/IP40 (naar beneden)

COLOUR TEMPERATURE

Tunable White, 2700K, 3000K, 3500K, 4000K

CRI

CR180, CR190

UGR

UGR kleiner dan 19

Introduction

Evolu-S white is an elegant, slim LED pendant luminaire fitted with a row of mid-power LEDs, each with an individual lens and louvre.



With the Evolu-S white, you choose architectural lighting that unites design and light quality. Designed for hospitality, office, education, public spaces, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Technical specifications

Mounting	Steel-wire suspension
Application	Hospitality, Office, Education, Public spaces
Material	Steel
Optics	Lens and louvre
UGR	UGR kleiner dan 19
IP class	IP20 (naar boven)/IP40 (naar beneden)
CRI	CRI80, CRI90
CCT	Tunable White, 2700K, 3000K, 3500K, 4000K
Control	1-10V dimmable, Casambi dimmable, DALI dimmable, Optional
Emergency lighting	1-hour emergency power, Optional, Optional 1-hour autonomy self-test
Service life	L90B50@60, 000h (Tq 25°C)
Voltage / freq.	220-240V, 50 / 60Hz
Efficiency	>140lm/W
CIE flux code	93 100 100 100 100
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class II
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Colour	Matte white
Options	Elegant 36 mm breed slank pendelarmatuur met mat witte structuurpoed-ercoating.
Brand	Atomis
Category	Pendant luminaires

Product photos

Atmosphere and product images — technical drawings are on a separate page

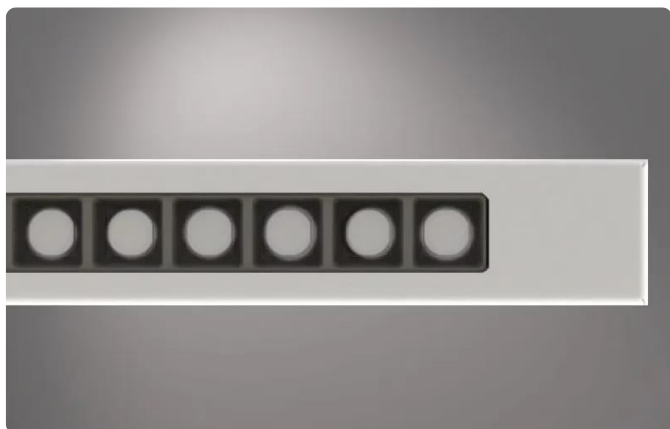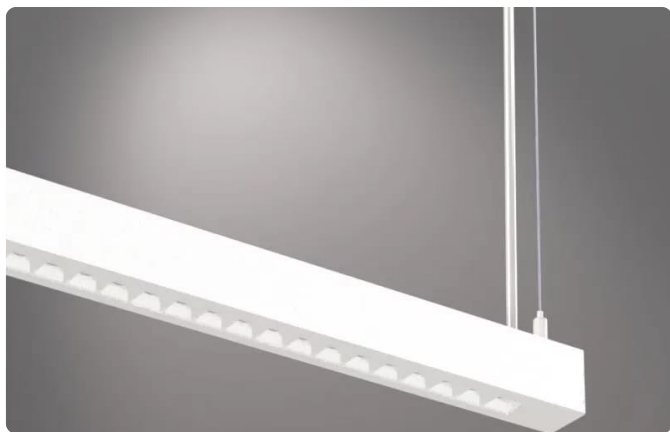

Technical drawings

Dimensions and line art — not to scale



Specification text

Evolu-S white is an elegant, slim LED pendant luminaire fitted with a row of mid-power LEDs, each with an individual lens and louvre. The luminaire combines a refined design with functional lighting for professional work environments. It creates a low-glare light distribution, is made of steel and finished with a decorative textured powder coating in matt white. Evolu-S white comes standard with a 3-metre power cord and steel-wire suspension. A ceiling console is available as an accessory for mounting on concrete ceilings.

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 9 July 2026