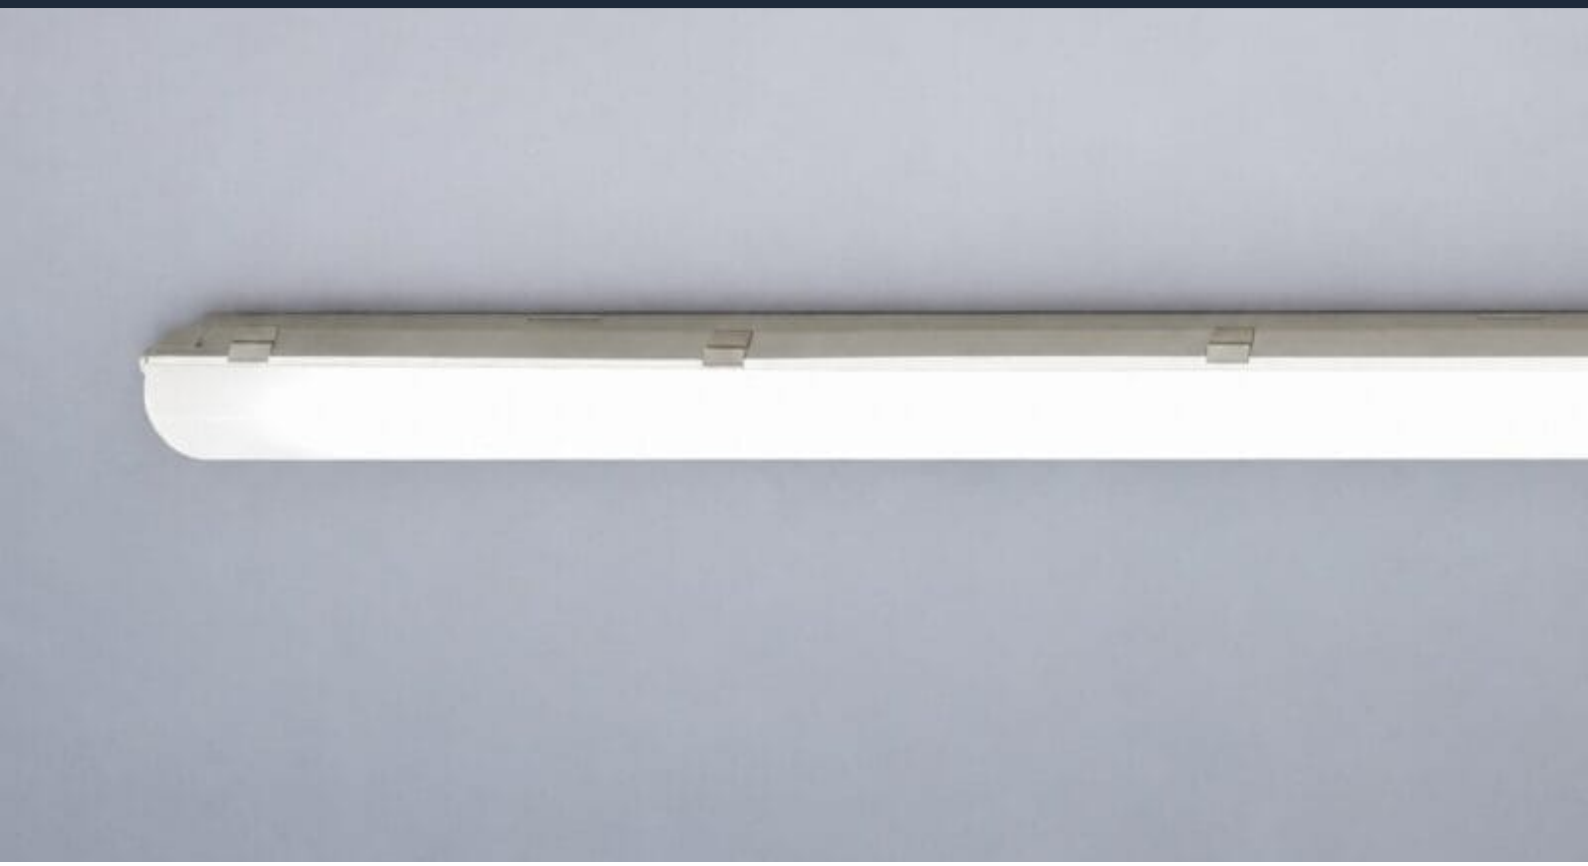


ATOLUX

Ferro lineair 1200

The Ferro lineair 1200 is a premium surface-mounted LED luminaire designed for projects where functionality, reliability and a clean, minimalist design come to…

CATEGORY **IP/IK klasse armaturen**	MOUNTING **Surface-mounted**	IP CLASS **IP66**
COLOUR TEMPERATURE **3000K, 4000K**	CRI **CRI80, CRI90**	

Introduction

The Ferro lineair 1200 is a premium surface-mounted LED luminaire designed for projects where functionality, reliability and a clean, minimalist design come to…

With the Ferro lineair 1200, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Features

- DALI dimming
- Motion sensors
- Wireless control options This makes the Ferro lineair 1200 suitable for energy-efficient and smart-building solutions
- IP40 (for dry indoor spaces)
- Diffuser impact resistance: IK05 for PMMA
- Dimensions: 1200 mm

Technical specifications

Mounting	**Surface-mounted**
Application	**Kantoren, Zorg, Education, Public spaces**
Dimensions	**90x1200mm**
Material	**Kunststof (behuizing)**
Optics	**Opaal**
IP class	**IP66**
CRI	**CRI80, CRI90**
CCT	**3000K, 4000K**
Control	**aan/uit, DALI-2, 1-10v, Casambi, On request**
Emergency lighting	**1-hour emergency power, 1 uur autonomie autotest**
Service life	**L90@100.000 uur**
Voltage / freq.	**220-240V, 50 / 60Hz**
Efficiency	**158-164 lm/W**
Photobiological safety	**IEC 62471: RG1 (low risk)**
Insulation class	**Class II**
Power factor	**>0.9**
Ambient temperature	**-20°C / +40°C**
Colour	**White**
Brand	**Atolux**
Category	**IP/IK klasse armaturen**

Product photos

Atmosphere and product images



Specification text

The Ferro lineair 1200 is a premium surface-mounted LED luminaire designed for projects where functionality, reliability and a clean, minimalist design come together. Thanks to its round shape and high-quality PMMA optics, this luminaire blends seamlessly into modern interiors in offices, commercial spaces, public buildings and utility projects. - DALI dimming - Motion sensors - Wireless control options This makes the Ferro lineair 1200 suitable for energy-efficient and smart-building solutions - IP40 (for dry indoor spaces) - Diffuser impact resistance: IK05 for PMMA - Dimensions: 1200 mm

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 3 November 2026