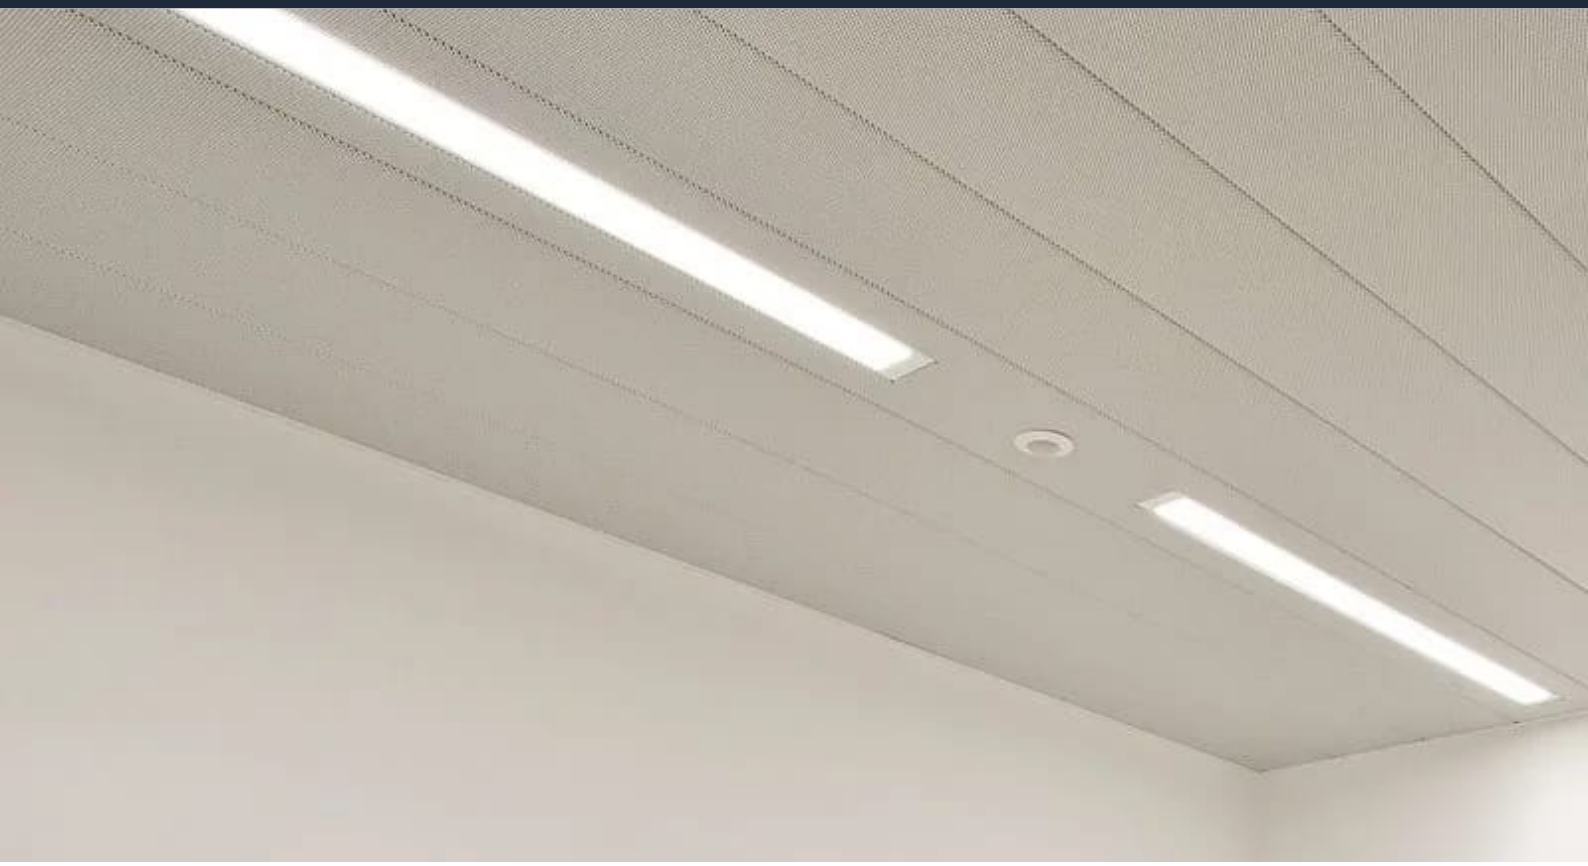


ATOMIS

Fusion Easy-KlimaPlus

Fusion Easy-KlimaPlus is a linear luminaire for use in Interalu Easy-KlimaPlus climate ceilings, with a prismatic lens or an opal diffuser. This LED luminaire …

CATEGORY	MOUNTING	IP CLASS
Climate ceiling luminaires, Baffle luminaires	**Recessed**	**IP20 (boven) / IP20 (onder)**
COLOUR TEMPERATURE	**CRI**	**UGR**
2700K, 3000K, 4000K, Tunable white, op aanvraag	**CRI80, CRI90**	**<19**

Introduction

Fusion Easy-KlimaPlus is a linear luminaire for use in Interalu Easy-KlimaPlus climate ceilings, with a prismatic lens or an opal diffuser. This LED luminaire …


With the Fusion-Easy-KlimaPlus 1200, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Technical specifications

Mounting	**Recessed**
Application	**Kantoren, Zorg, Education, Public spaces, Vrijetijdssector**
Dimensions	**On request**
Material	**Staal (behuizing)**
Optics	**Microprisma**
UGR	**<19**
IP class	**IP20 (boven) / IP20 (onder)**
CRI	**CRI80, CRI90**
CCT	**2700K, 3000K, 4000K, Tunable white, On request**
Control	**aan/uit, DALI-2, 1-10v, Casambi, On request**
Emergency lighting	**1-hour emergency power, 1 uur autonomie autotest**
Service life	**L90@50.000 uur**
Voltage / freq.	**220-240V, 50 / 60Hz**
Photobiological safety	**IEC 62471: RG1 (low risk)**
Insulation class	**Class II**
Power factor	**>0.9**
Ambient temperature	**-20°C / +40°C**
Colour	**RAL9016, RAL9005, On request**
Brand	**Atomis**
Category	**Climate ceiling luminaires, Baffle luminaires**

Product photos

Atmosphere and product images

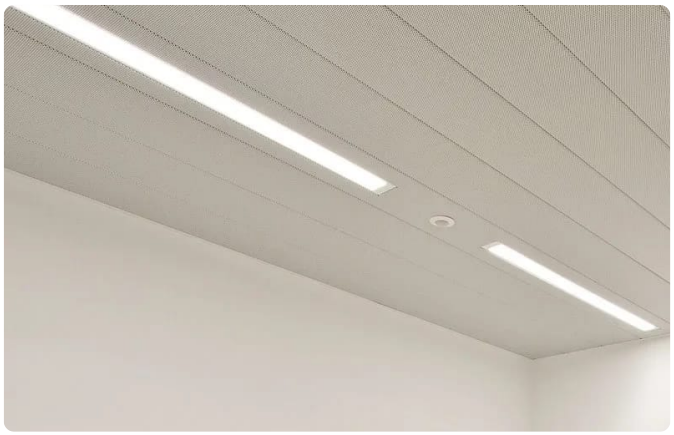

Specification text

Fusion-Easy-KlimaPlus 1200 is a climate ceiling and baffle luminaire from the Fusion range by Atomis. The luminaire is recessed, directed downward and fitted with a microprismatic optic. The range is intended for offices, healthcare, education, public spaces and leisure venues.

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information held in the Atomis luminaire database. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 8 November 2026