


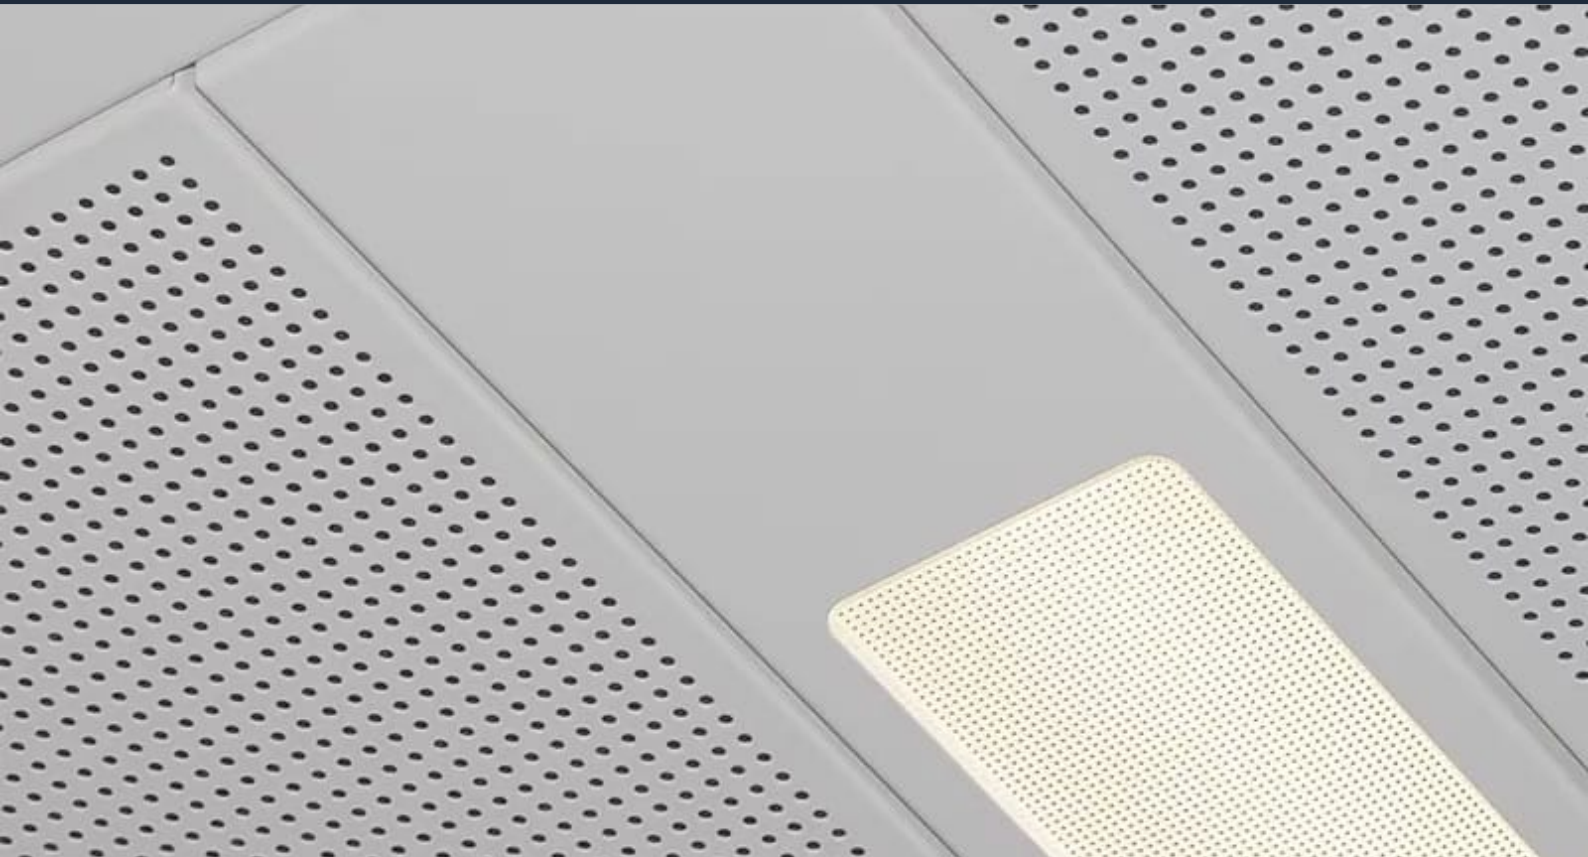

ATOMIS

Fusion-K

Fusion-K is a linear luminaire for use in climate ceilings, with a prismatic lens (UGR < 19) or an opal diffuser. The luminaires are made of steel finished wit...

CATEGORY

Climate ceiling luminaires

MOUNTING

Inleg

IP CLASS

IP20 (boven) / IP20 (onder)

COLOUR TEMPERATURE

**2700K, 3000K, 4000K, Tunable
white, op aanvraag**

CRI

CRI80, CRI90

UGR

<19

Introduction

Fusion-K is a linear luminaire for use in climate ceilings, with a prismatic lens (UGR < 19) or an opal diffuser. The luminaires are made of steel finished wit...

With the Fusion-K, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Features

Integrates seamlessly into metal ceilings

Architectural appearance

Fitted with a prismatic lens (UGR < 19) or an opal diffuser

C-hook mounting allows easy installation

See me in 3D in the virtual tour

Technical specifications

Mounting	Inleg
Application	Kantoren, Zorg, Education, Public spaces, Vrijtjidssector
Dimensions	On request
Material	Staal (behuizing)
Optics	Microprisma
UGR	<19
IP class	IP20 (boven) / IP20 (onder)
CRI	CRI80, CRI90
CCT	2700K, 3000K, 4000K, Tunable white, On request
Control	aan/uit, DALI-2, 1-10v, Casambi, On request
Emergency lighting	1-hour emergency power, 1 uur autonomie autotest
Voltage / freq.	220-240V, 50 / 60Hz
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class II
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Colour	RAL9016, RAL9005, On request
Brand	Atomis
Category	Climate ceiling luminaires

Product photos

Atmosphere and product images



Specification text

Fusion-K is a linear luminaire for use in climate ceilings, with a prismatic lens (UGR < 19) or an opal diffuser. The luminaires are made of steel finished with a powder coating. The way the units are fixed varies depending on the climate-ceiling system.

- Integrates seamlessly into metal ceilings - Architectural appearance - Fitted with a prismatic lens (UGR < 19) or an opal diffuser - C-hook mounting allows easy installation - See me in 3D in the virtual tour

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 11 September 2026