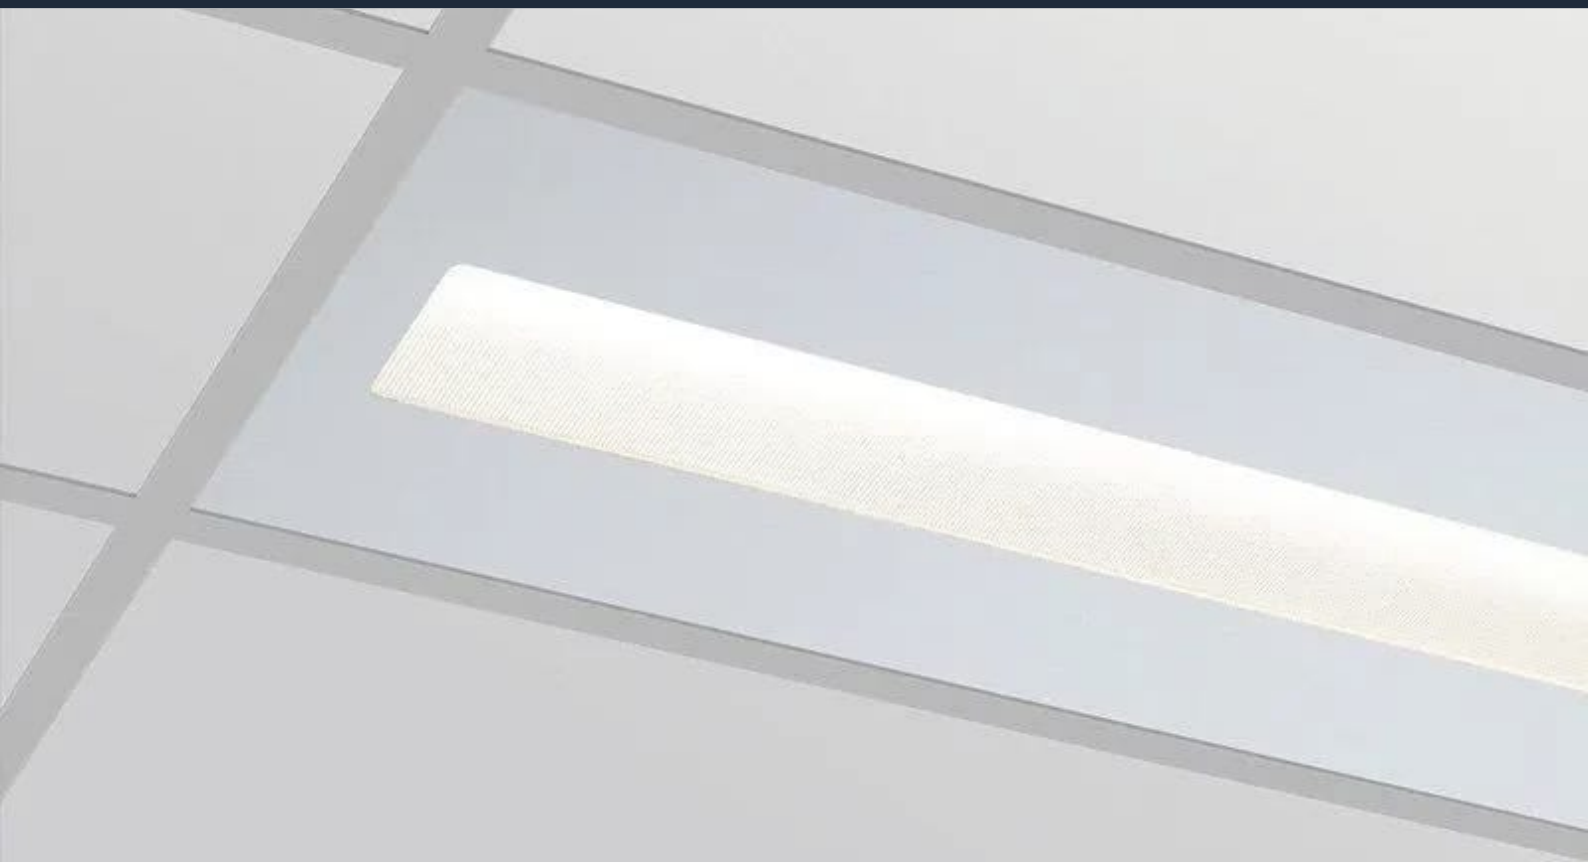


ATOMIS

Fusion-M Linear

Fusion-M Linear is a range of LED luminaires with modular dimensions for use in suspended ceilings. These modules were developed as an alternative to T8 and T5…

CATEGORY **Recessed & lay-in luminaires**	MOUNTING **Inleg**	IP CLASS **IP20 (boven) / IP20 (onder)**
COLOUR TEMPERATURE **2700K, 3000K, 4000K, Tunable white, op aanvraag**	CRI **CRI80, CRI90**	UGR **<19**

Introduction

Fusion-M Linear is a range of LED luminaires with modular dimensions for use in suspended ceilings. These modules were developed as an alternative to T8 and T5…


With the Fusion-M 300x1200, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Technical specifications

Mounting	**Inleg**
Application	**Kantoren, Zorg, Education, Public spaces, Vrijetijdssector**
Dimensions	**295x1195mm**
Material	**Staal (behuizing)**
Optics	**Microprisma**
UGR	**<19**
IP class	**IP20 (boven) / IP20 (onder)**
CRI	**CRI80, CRI90**
CCT	**2700K, 3000K, 4000K, Tunable white, On request**
Control	**aan/uit, DALI-2, 1-10v, Casambi, On request**
Emergency lighting	**1-hour emergency power, 1 uur autonomie autotest**
Service life	**L90@50.000 uur**
Voltage / freq.	**220-240V, 50 / 60Hz**
Efficiency	**>140lm/W**
Photobiological safety	**IEC 62471: RG1 (low risk)**
Insulation class	**Class II**
Power factor	**>0.9**
Ambient temperature	**-20°C / +40°C**
Colour	**RAL9016, RAL9005, On request**
Options	**Remote driver, Optional, BST 14i2, Europlug, GST18i3, GST18i5 pastel-blauw, On request, On the driver**
Brand	**Atomis**
Category	**Recessed & lay-in luminaires**

Product photos

Atmosphere and product images

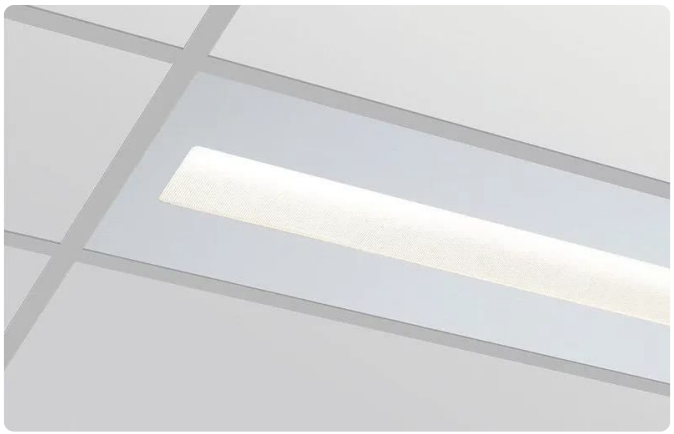

Specification text

Fusion-M 300x1200 is a recessed and lay-in luminaire from the Fusion range by Atomis. The luminaire is lay-in, directed downward and fitted with a microprismatic optic. The range is intended for offices, healthcare, education, public spaces and leisure venues.

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information held in the Atomis luminaire database. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 27 November 2026