


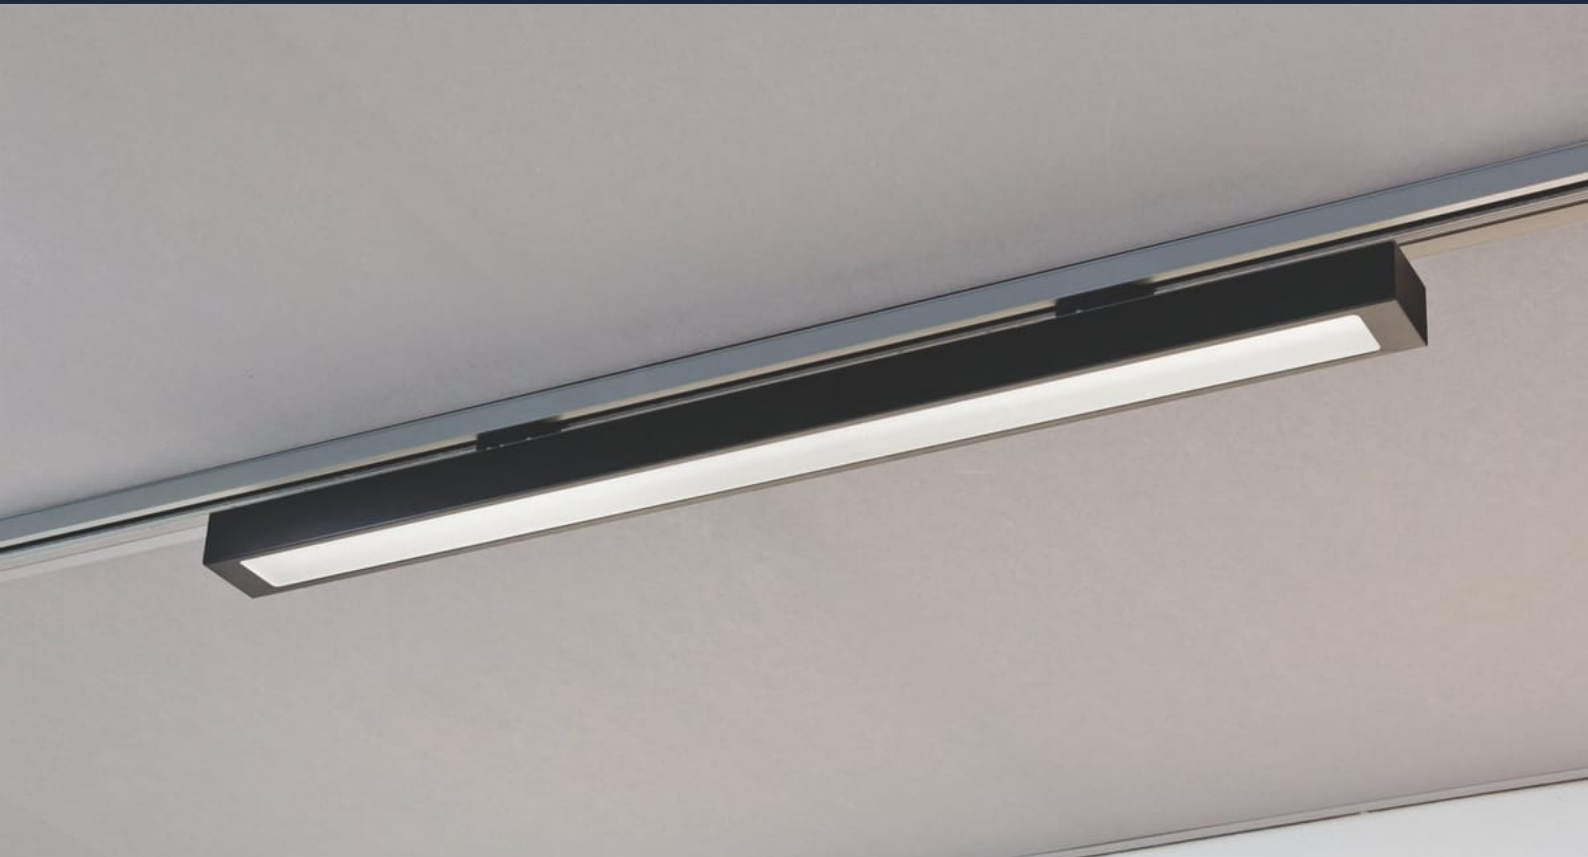

ATOMIS

Fusion-Track

Fusion-Track is a surface-mounted luminaire with a track adapter for direct mounting on three-phase track. Fusion offers an elegant and effective lighting solu...

CATEGORY

Track luminaires

MOUNTING

Track

IP CLASS

IP20 (boven) / IP20 (onder)

COLOUR TEMPERATURE

**2700K, 3000K, 4000K, Tunable
white, op aanvraag**

CRI

CRI80, CRI90

UGR

<19

Introduction

Fusion-Track is a surface-mounted luminaire with a track adapter for direct mounting on three-phase track. Fusion offers an elegant and effective lighting solu...

With the Fusion-Track, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, retail, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Features

Easy mounting on new or existing track

Architectural appearance

Fitted with a prismatic lens (UGR < 19) or an opal diffuser

Technical specifications

Mounting	Track
Application	Kantoren, Zorg, Education, Public spaces, Vrijtjidssector, Retail
Dimensions	80x1200mm
Material	Staal (behuizing)
Optics	Microprisma
UGR	<19
IP class	IP20 (boven) / IP20 (onder)
CRI	CRI80, CRI90
CCT	2700K, 3000K, 4000K, Tunable white, On request
Control	aan/uit, DALI-2, 1-10v, Casambi, On request
Emergency lighting	1 uur noodtroom, 1 uur autonomie autotest
Voltage / freq.	220-240V, 50 / 60Hz
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class II
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Colour	RAL9016, RAL9005, On request
Brand	Atomis
Category	Track luminaires

Product photos

Atmosphere and product images



Specification text

Fusion-Track is a surface-mounted luminaire with a track adapter for direct mounting on three-phase track. Fusion offers an elegant and effective lighting solution with high light levels. The optics of the Fusion-Track feature a microprismatic lens with low surface luminance ($UGR < 19$) for even and comfortable lighting. - Easy mounting on new or existing track - Architectural appearance - Fitted with a prismatic lens ($UGR < 19$) or an opal diffuser

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 28 August 2026