



ATOLUX

Interline-SAPP Opaal 1510

Interline-SAPP Opaal 1510 is a climate ceiling and baffle luminaire from the Interline range by Atolux. The luminaire is lay-in, directed downward and fitted with an opal diffuser. The range is intended for offices, healthcare, education, public spaces and leisure venues.

CATEGORY

Climate ceiling luminaires, Baffle luminaires

MOUNTING

Inleg

IP CLASS

IP20 (boven) / IP20 (onder)

COLOUR TEMPERATURE

3000K, 4000K

CRI

CRI90

UGR

<22

Introduction

Interline-SAPP Opaal 1510 is a climate ceiling and baffle luminaire from the Interline range by Atolux. The luminaire is lay-in, directed downward and fitted with an opal diffuser. The range is intended for offices, healthcare, education, public spaces and leisure venues.


With the Interline-SAPP Opaal 1510, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Technical specifications

Mounting	Inleg
Application	Kantoren, Zorg, Education, Public spaces, Vrijtjidssector
Dimensions	21x1510mm
Material	Aluminium (behuizing)
Optics	Opaal
UGR	<22
IP class	IP20 (boven) / IP20 (onder)
CRI	CRI90
CCT	3000K, 4000K
Control	aan/uit, DALI-2, 1-10v, Casambi, On request
Emergency lighting	1-hour emergency power, 1 uur autonomie autotest
Voltage / freq.	220-240V, 50 / 60Hz
Efficiency	115
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class II
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Colour	RAL9016, RAL9005, On request
Brand	Atolux
Category	Climate ceiling luminaires, Baffle luminaires

Product photos

Atmosphere and product images

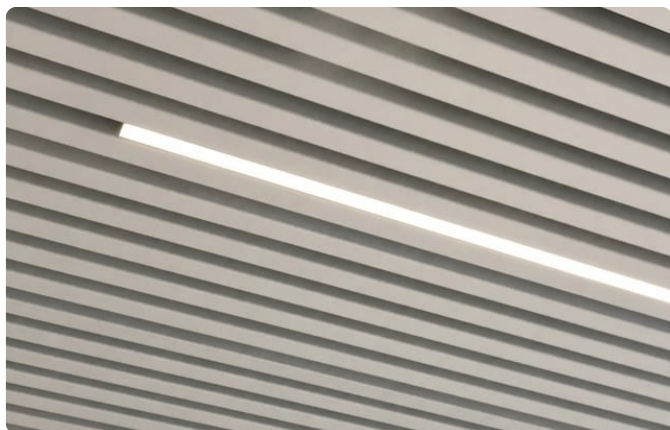

Specification text

Interline-SAPP Opaal 1510 is a climate ceiling and baffle luminaire from the Interline range by Atolux. The luminaire is lay-in, directed downward and fitted with an opal diffuser. The range is intended for offices, healthcare, education, public spaces and leisure venues.

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information held in the Atomis luminaire database. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 7 September 2026