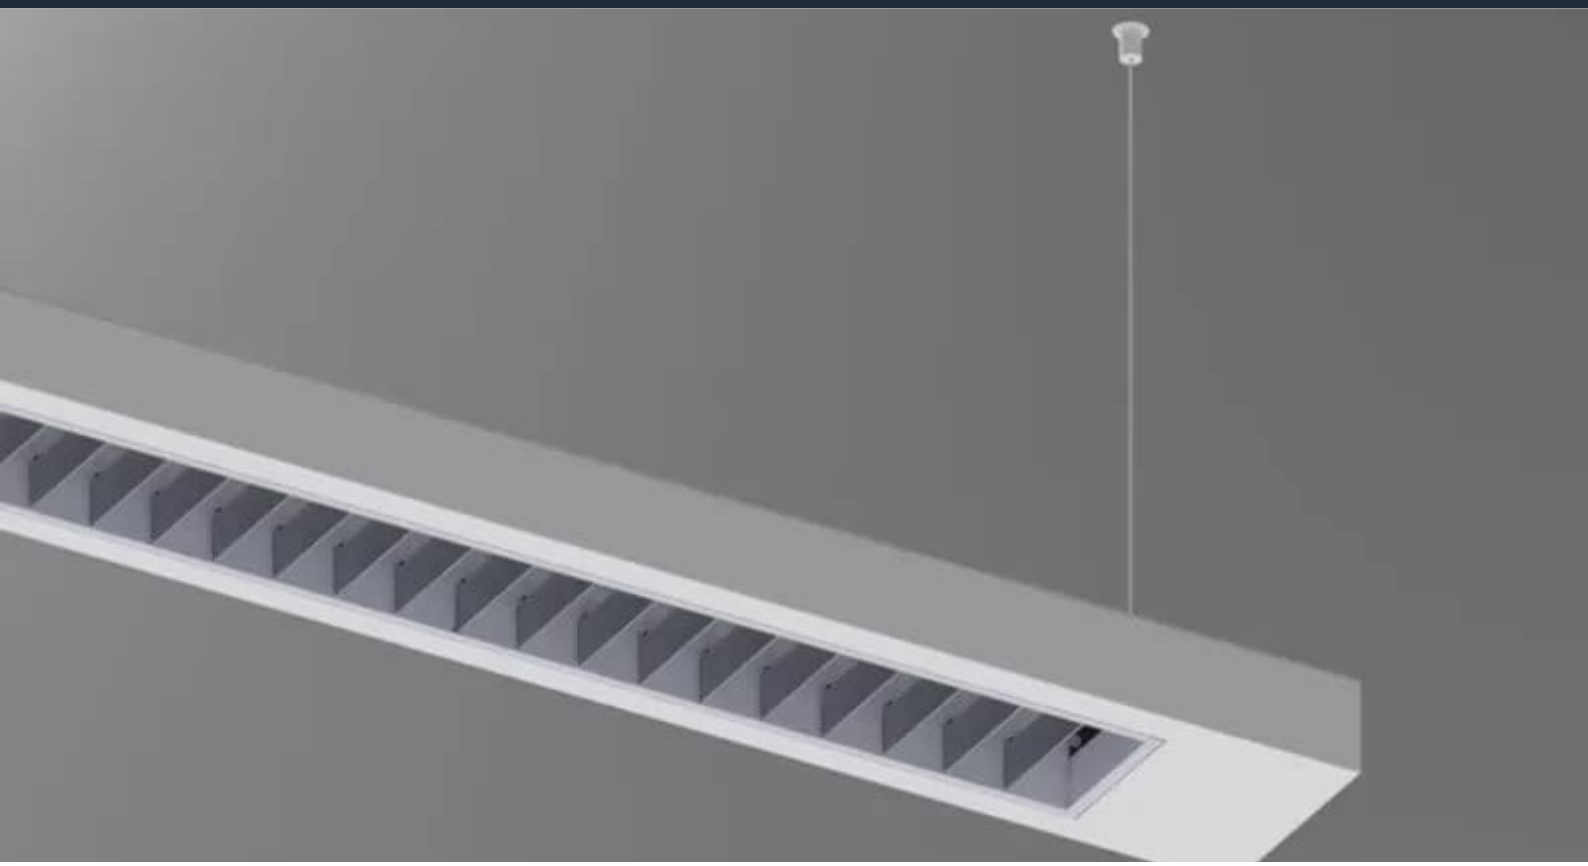


ATOMIS

Linterna-S

Linterna-S is a linear pendant luminaire with a parabolic louvre.

CATEGORY **Pendant luminaires**	MOUNTING **Pendant**	IP CLASS **IP20 (boven) / IP20 (onder)**
COLOUR TEMPERATURE **2700K, 3000K, 4000K, Tunable white, op aanvraag**	CRI **CRI80, CRI90**	UGR **<19**

Introduction

Linterna-S is a linear pendant luminaire with a parabolic louvre.


With the Linterna-S, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Technical specifications


Mounting	**Pendant**
Application	**Kantoren, Zorg, Education, Public spaces, Vrijetijdssector**
Dimensions	**On request**
Material	**Staal (behuizing)**
Optics	**Parabool reflector**
UGR	**<19**
IP class	**IP20 (boven) / IP20 (onder)**
CRI	**CRI80, CRI90**
CCT	**2700K, 3000K, 4000K, Tunable white, On request**
Control	**aan/uit, DALI-2, 1-10v, Casambi, On request**
Emergency lighting	**1-hour emergency power, 1 uur autonomie autotest**
Service life	**L90@50.000 uur**
Voltage / freq.	**220-240V, 50 / 60Hz**
Photobiological safety	**IEC 62471: RG1 (low risk)**
Insulation class	**Class I**
Power factor	**>0.9**
Ambient temperature	**-20°C / +40°C**
Colour	**RAL9016, RAL9005, On request**
Brand	**Atomis**
Category	**Pendant luminaires**

Product photos

Atmosphere and product images

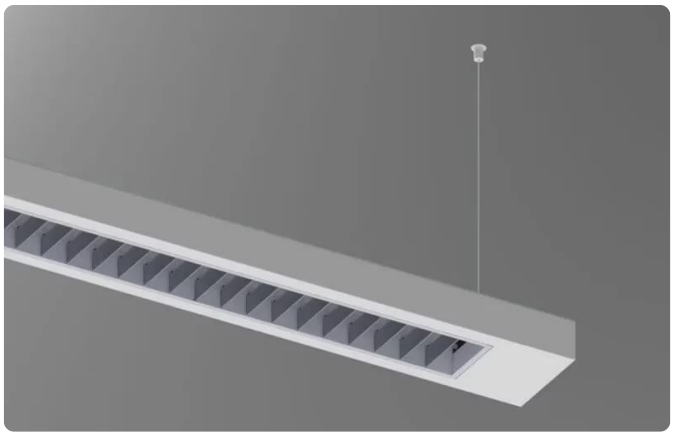



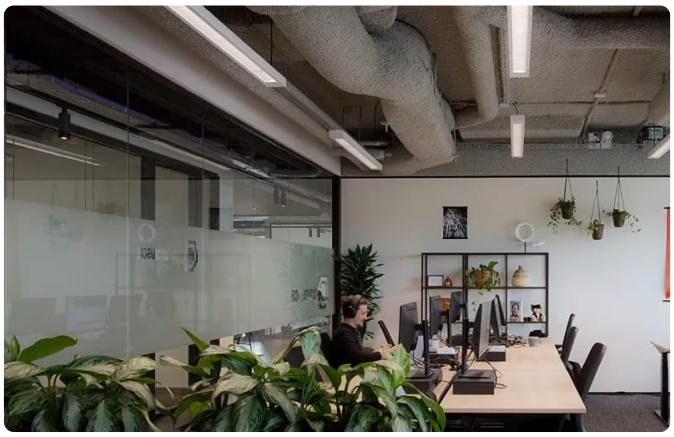

Specification text

Linterna-S is a linear pendant luminaire with a parabolic louvre. The parabolic batwing louvre design allows larger spacing between luminaires while maintaining good uniformity. This makes Linterna-S suitable for projects where a slim pendant luminaire, controlled light distribution and low glare come together.

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 7 November 2026