

ATOMIS

Metronome-B

Metronome-B is a linear LED luminaire fitted with 20, 28 or 36 lenses, recessed behind a louvre grille, for use in grid (bandraster) ceilings. This LED luminai…

CATEGORY	MOUNTING	IP CLASS
Recessed & lay-in luminaires	**Inleg**	**IP20 (boven) / IP20 (onder)**
COLOUR TEMPERATURE	**CRI**	**UGR**
2700K, 3000K, 4000K, Tunable white, op aanvraag	**CRI80, CRI90**	**<19**

Introduction

Metronome-B is a linear LED luminaire fitted with 20, 28 or 36 lenses, recessed behind a louvre grille, for use in grid (bandraster) ceilings. This LED luminai…

With the Metronome-B, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Features


- Architectural appearance with 20, 28 or 36 optics
- Choice between UGR < 19 and UGR < 16 optics
- Louvre finish in white or high-gloss aluminium
- Flat design for low ceiling depths

Technical specifications

Mounting	**Inleg**
Application	**Kantoren, Zorg, Education, Public spaces, Vrijetijdssector**
Dimensions	**On request**
Material	**Staal (behuizing)**
Optics	**Lens met Louver**
UGR	**<19**
IP class	**IP20 (boven) / IP20 (onder)**
CRI	**CRI80, CRI90**
CCT	**2700K, 3000K, 4000K, Tunable white, On request**
Control	**aan/uit, DALI-2, 1-10v, Casambi, On request**
Emergency lighting	**1-hour emergency power, 1 uur autonomie autotest**
Service life	**L90@50.000 uur**
Voltage / freq.	**220-240V, 50 / 60Hz**
Photobiological safety	**IEC 62471: RG1 (low risk)**
Insulation class	**Class II**
Power factor	**>0.9**
Ambient temperature	**-20°C / +40°C**
Colour	**RAL9016, RAL9005, On request**
Brand	**Atomis**
Category	**Recessed & lay-in luminaires**

Product photos

Atmosphere and product images

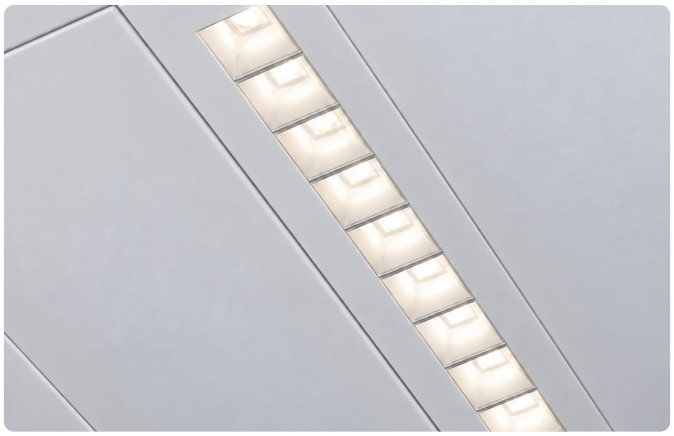

Specification text

Metronome-B is a linear LED luminaire fitted with 20, 28 or 36 lenses, recessed behind a louvre grille, for use in grid (bandraster) ceilings. This LED luminaire is an entirely new lighting solution for effective lighting with an architectural appearance. A choice can be made between UGR < 19 and UGR < 16 optics. - Architectural appearance with 20, 28 or 36 optics - Choice between UGR < 19 and UGR < 16 optics - Louvre finish in white or high-gloss aluminium - Flat design for low ceiling depths

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 10 November 2026