



ATOMIS

# Metronome-C

Metronome-C is a linear LED luminaire fitted with 20, 28 or 36 lenses, recessed behind a louvre grille. This LED luminaire is an entirely new lighting solution...

**CATEGORY**

**Surface-mounted luminaires**

**MOUNTING**

**Ceiling-mounted**

**IP CLASS**

**IP20 (naar boven)/IP40 (naar beneden)**

**COLOUR TEMPERATURE**

**2700K, 3000K, 3500K, 4000K, Tunable White**

**CRI**

**CR180, CR190**

**UGR**

**<19**

## Introduction

Metronome-C is a linear LED luminaire fitted with 20, 28 or 36 lenses, recessed behind a louvre grille. This LED luminaire is an entirely new lighting solution...

With the Metronome-C, you choose architectural lighting that unites design and light quality. Designed for hospitality, office, education, public spaces, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

---

## Features

Architectural appearance with 20, 28 or 36 optics

Choice between UGR < 19 and UGR < 16 optics

Louvre finish in white or high-gloss aluminium


Flat design for low ceiling depths

## Technical specifications

Mounting	<b>Ceiling-mounted</b>
Application	<b>Hospitality, Office, Education, Public spaces</b>
Material	<b>Acrylic, Steel</b>
Optics	<b>Lens and louvre</b>
UGR	<b>&lt;19</b>
IP class	<b>IP20 (naar boven)/IP40 (naar beneden)</b>
CRI	<b>CRI80, CRI90</b>
CCT	<b>2700K, 3000K, 3500K, 4000K, Tunable White</b>
Control	<b>1-10V dimmable, Casambi dimmable, DALI dimmable, Optional</b>
Emergency lighting	<b>1-hour emergency power, Optional, Optional 1-hour autonomy self-test</b>
Efficiency	<b>&gt;140lm/W</b>
Photobiological safety	<b>IEC 62471: RG1 (low risk)</b>
Insulation class	<b>Class I</b>
Power factor	<b>&gt;0.9</b>
Ambient temperature	<b>-20°C / +40°C</b>
Options	<b>Attached to the luminaire, Remote driver, Optional, On request, On the driver</b>
Brand	<b>Atomis</b>
Category	<b>Surface-mounted luminaires</b>

## Technical drawings

Dimensions and line art — not to scale

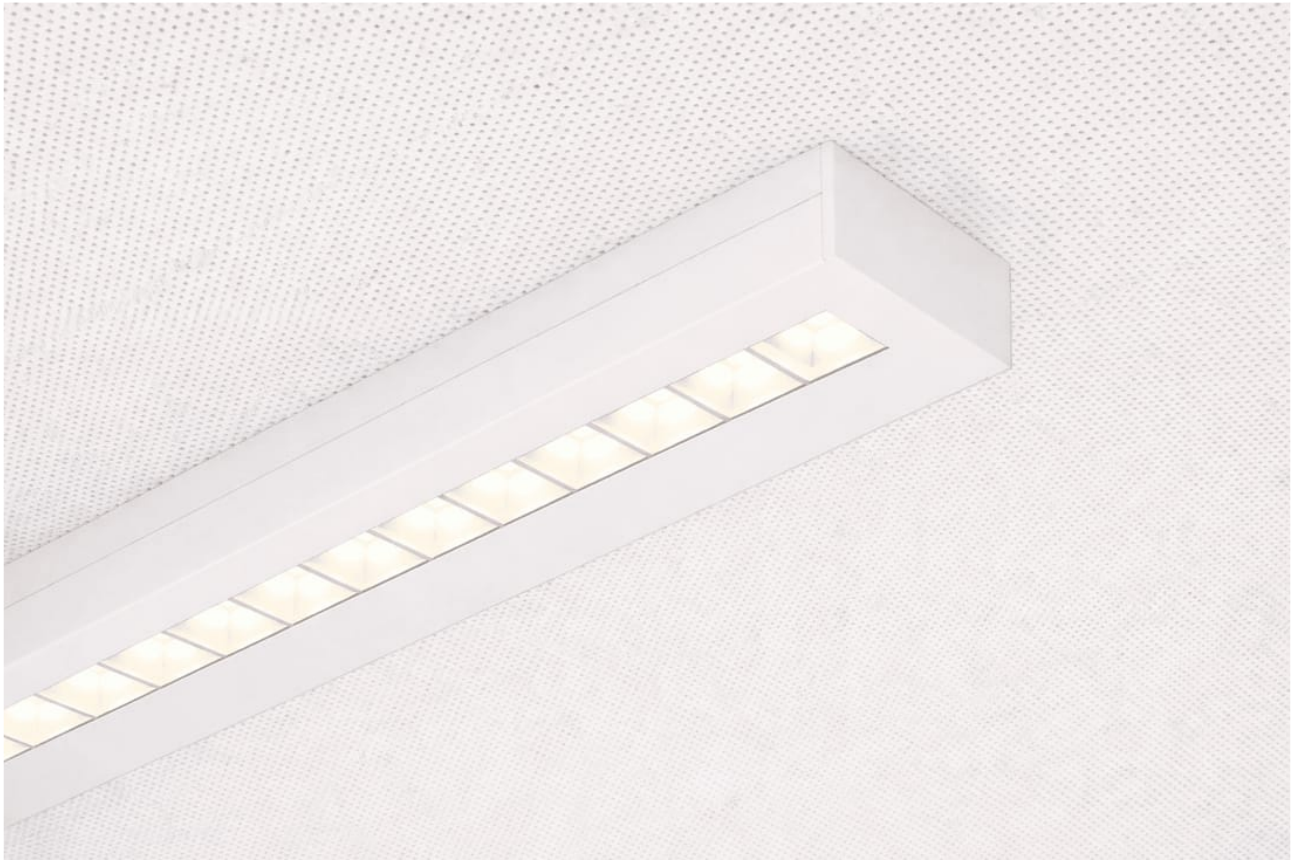

Photometric drawing

## Specification text

Metronome-C is a linear LED luminaire fitted with 20, 28 or 36 lenses, recessed behind a louvre grille. This LED luminaire is an entirely new lighting solution for effective lighting with an architectural appearance. A choice can be made between UGR < 19 optics (standard) and UGR < 16. - Architectural appearance with 20, 28 or 36 optics - Choice between UGR < 19 and UGR < 16 optics - Louvre finish in white or high-gloss aluminium - Flat design for low ceiling depths

## Information

### Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

---

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 5 July 2026