

ATOMIS

Metronome-K

Linear LED luminaire for climate ceilings, fitted with 20, 28 or 36 recessed lenses behind a louvre grille.

CATEGORY **Climate ceiling luminaires**	MOUNTING **Inleg**	IP CLASS **IP20 (boven) / IP20 (onder)**
COLOUR TEMPERATURE **2700K, 3000K, 4000K, Tunable white, op aanvraag**	CRI **CRI80, CRI90**	UGR **<19**

Introduction

Linear LED luminaire for climate ceilings, fitted with 20, 28 or 36 recessed lenses behind a louvre grille.


With the Metronome-K, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Technical specifications

Mounting	**Inleg**
Application	**Kantoren, Zorg, Education, Public spaces, Vrijetijdssector**
Dimensions	**On request**
Material	**Staal (behuizing)**
Optics	**Lens met Louver**
UGR	**<19**
IP class	**IP20 (boven) / IP20 (onder)**
CRI	**CRI80, CRI90**
CCT	**2700K, 3000K, 4000K, Tunable white, On request**
Control	**aan/uit, DALI-2, 1-10v, Casambi, On request**
Emergency lighting	**1-hour emergency power, 1 uur autonomie autotest**
Service life	**L90@50.000 uur**
Voltage / freq.	**220-240V, 50 / 60Hz**
Photobiological safety	**IEC 62471: RG1 (low risk)**
Insulation class	**Class II**
Power factor	**>0.9**
Ambient temperature	**-20°C / +40°C**
Colour	**RAL9016, RAL9005, On request**
Brand	**Atomis**
Category	**Climate ceiling luminaires**

Product photos

Atmosphere and product images

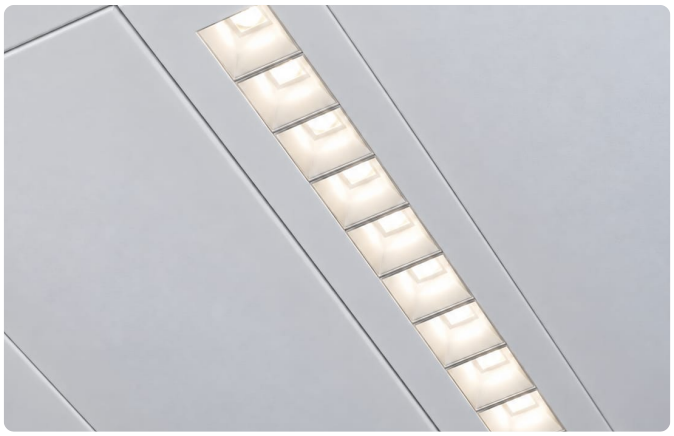

Specification text

Metronome-K is a linear LED luminaire for effective lighting with an architectural appearance. The luminaire combines a controlled light distribution with high visual comfort and is suitable for integration into climate ceilings and exposed grid ceilings. A choice can be made between UGR < 19 optics as the standard solution and UGR < 16 for applications with extra-high glare-control requirements.

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 10 November 2026