


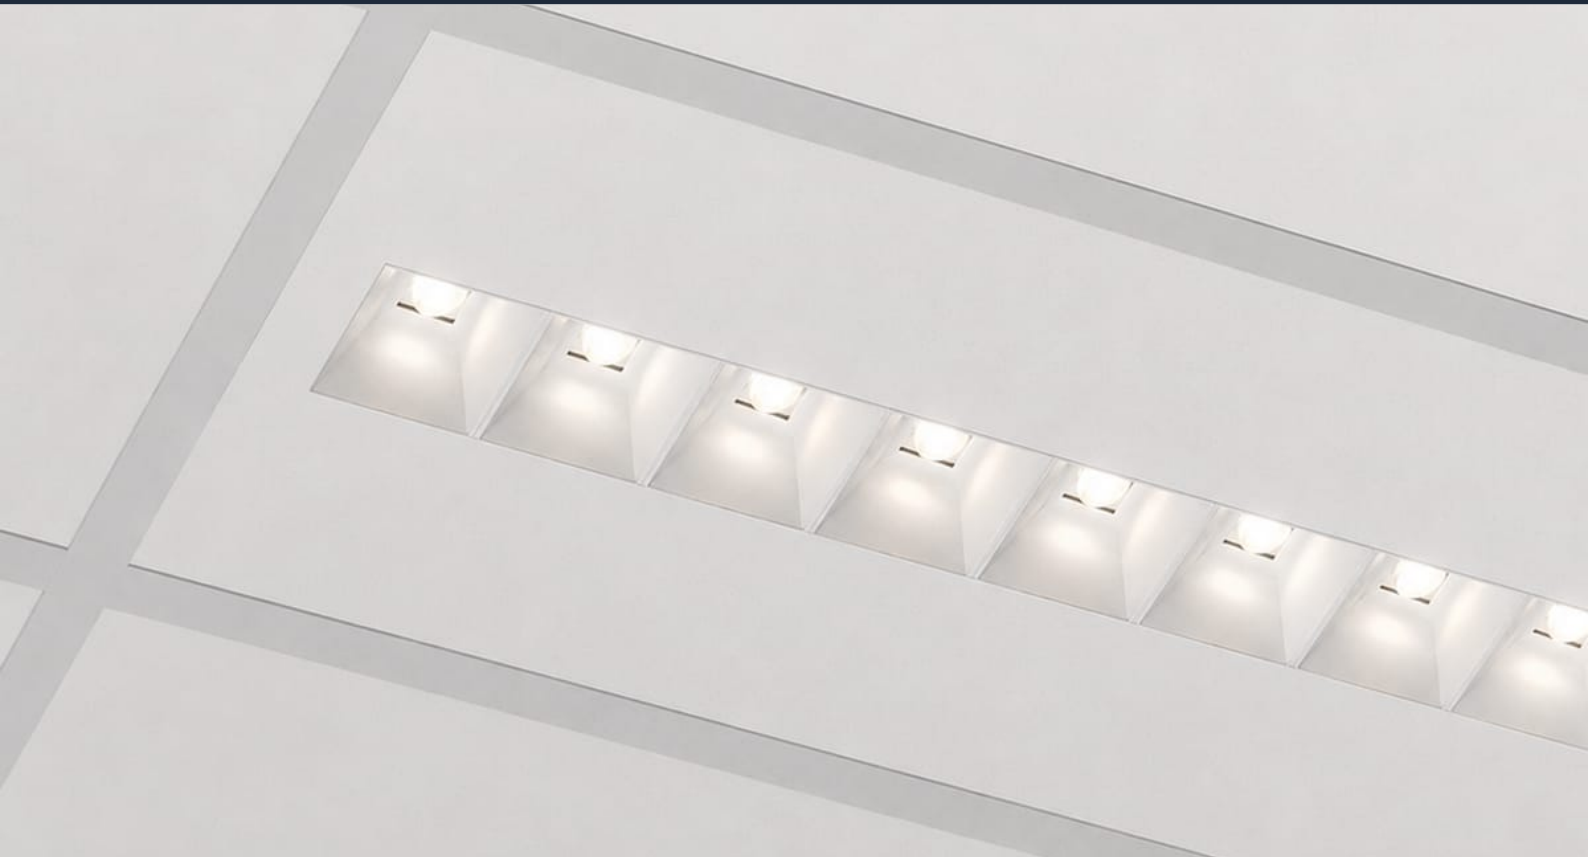

ATOMIS

Metronome-M 300x1200

Metronome-M 300x1200 is a recessed and lay-in luminaire from the Metronome range by Atomis. The luminaire is lay-in, directed downward and fitted with a lens with louvre. The range is intended for offices, healthcare, education, public spaces and leisure venues.

CATEGORY

Recessed & lay-in luminaires

MOUNTING

Inleg

IP CLASS

IP20 (boven) / IP20 (onder)

COLOUR TEMPERATURE

**2700K, 3000K, 4000K, Tunable
white, op aanvraag**

CRI

CRI80, CRI90

UGR

<19

Introduction

Metronome-M 300x1200 is a recessed and lay-in luminaire from the Metronome range by Atomis. The luminaire is lay-in, directed downward and fitted with a lens with louvre. The range is intended for offices, healthcare, education, public spaces and leisure venues.


With the Metronome-M 300x1200, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Technical specifications

Mounting	Inleg
Application	Kantoren, Zorg, Education, Public spaces, Vrijtjidssector
Dimensions	295x1195mm
Material	Staal (behuizing)
Optics	Lens met Louver
UGR	<19
IP class	IP20 (boven) / IP20 (onder)
CRI	CRI80, CRI90
CCT	2700K, 3000K, 4000K, Tunable white, On request
Control	aan/uit, DALI-2, 1-10v, Casambi, On request
Emergency lighting	1 uur noodtroom, 1 uur autonomie autotest
Voltage / freq.	220-240V, 50 / 60Hz
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class II
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Colour	RAL9016, RAL9005, On request
Brand	Atomis
Category	Recessed & lay-in luminaires

Product photos

Atmosphere and product images

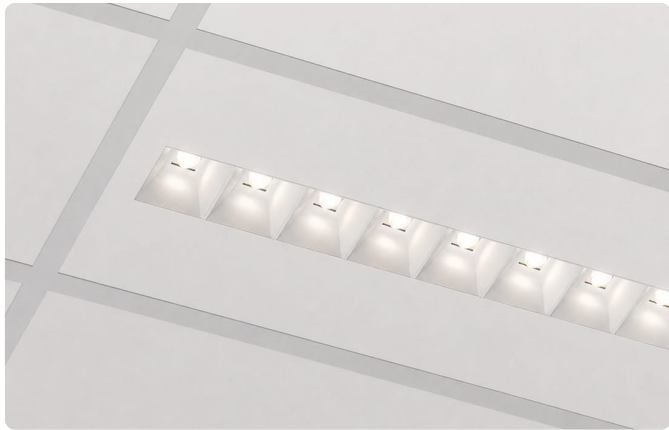

Specification text

Metronome-M 300x1200 is a recessed and lay-in luminaire from the Metronome range by Atomis. The luminaire is lay-in, directed downward and fitted with a lens with louvre. The range is intended for offices, healthcare, education, public spaces and leisure venues.

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information held in the Atomis luminaire database. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 11 August 2026