

ATOMIS

Metronome-M square

Metronome-M square is a square LED luminaire with 32 recessed lenses placed behind a louvre grille. This innovative luminaire provides effective lighting and a…

CATEGORY **Recessed & lay-in luminaires**	MOUNTING **Inleg**	IP CLASS **IP20 (boven) / IP20 (onder)**
COLOUR TEMPERATURE **2700K, 3000K, 4000K, Tunable white, op aanvraag**	CRI **CRI80, CRI90**	UGR **<19**

Introduction

Metronome-M square is a square LED luminaire with 32 recessed lenses placed behind a louvre grille. This innovative luminaire provides effective lighting and a…


With the Metronome-M Square 600x600, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Technical specifications

Mounting	**Inleg**
Application	**Kantoren, Zorg, Education, Public spaces, Vrijetijdssector**
Dimensions	**595x595mm**
Material	**Staal (behuizing)**
Optics	**Lens met Louver**
UGR	**<19**
IP class	**IP20 (boven) / IP20 (onder)**
CRI	**CRI80, CRI90**
CCT	**2700K, 3000K, 4000K, Tunable white, On request**
Control	**aan/uit, DALI-2, 1-10v, Casambi, On request**
Emergency lighting	**1-hour emergency power, 1 uur autonomie autotest**
Service life	**L90@50.000 uur**
Voltage / freq.	**220-240V, 50 / 60Hz**
Efficiency	**>140lm/W**
Photobiological safety	**IEC 62471: RG1 (low risk)**
Insulation class	**Class II**
Power factor	**>0.9**
Ambient temperature	**-20°C / +40°C**
Colour	**RAL9016, RAL9005, On request**
Options	**Attached to the luminaire, Remote driver, Optional, BST 14i2, Europlug, GST18i3, GST18i5 pastelblauw, On request, On the driver**
Brand	**Atomis**
Category	**Recessed & lay-in luminaires**

Product photos

Atmosphere and product images

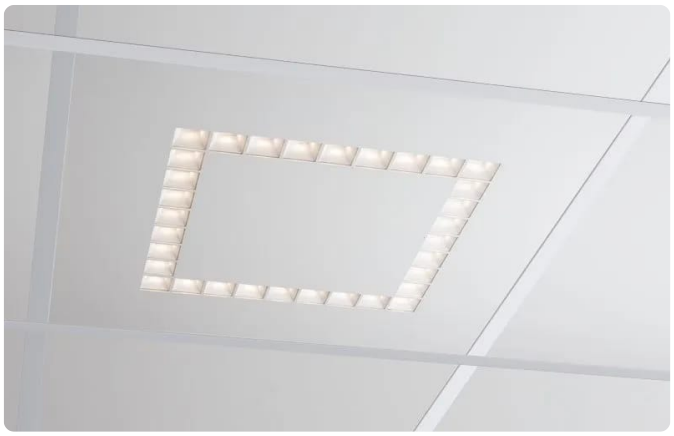





Specification text

Metronome-M Square 600x600 is a recessed and lay-in luminaire from the Metronome range by Atomis. The luminaire is lay-in, directed downward and fitted with a lens with louvre. The range is intended for offices, healthcare, education, public spaces and leisure venues.

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information held in the Atomis luminaire database. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 9 November 2026