


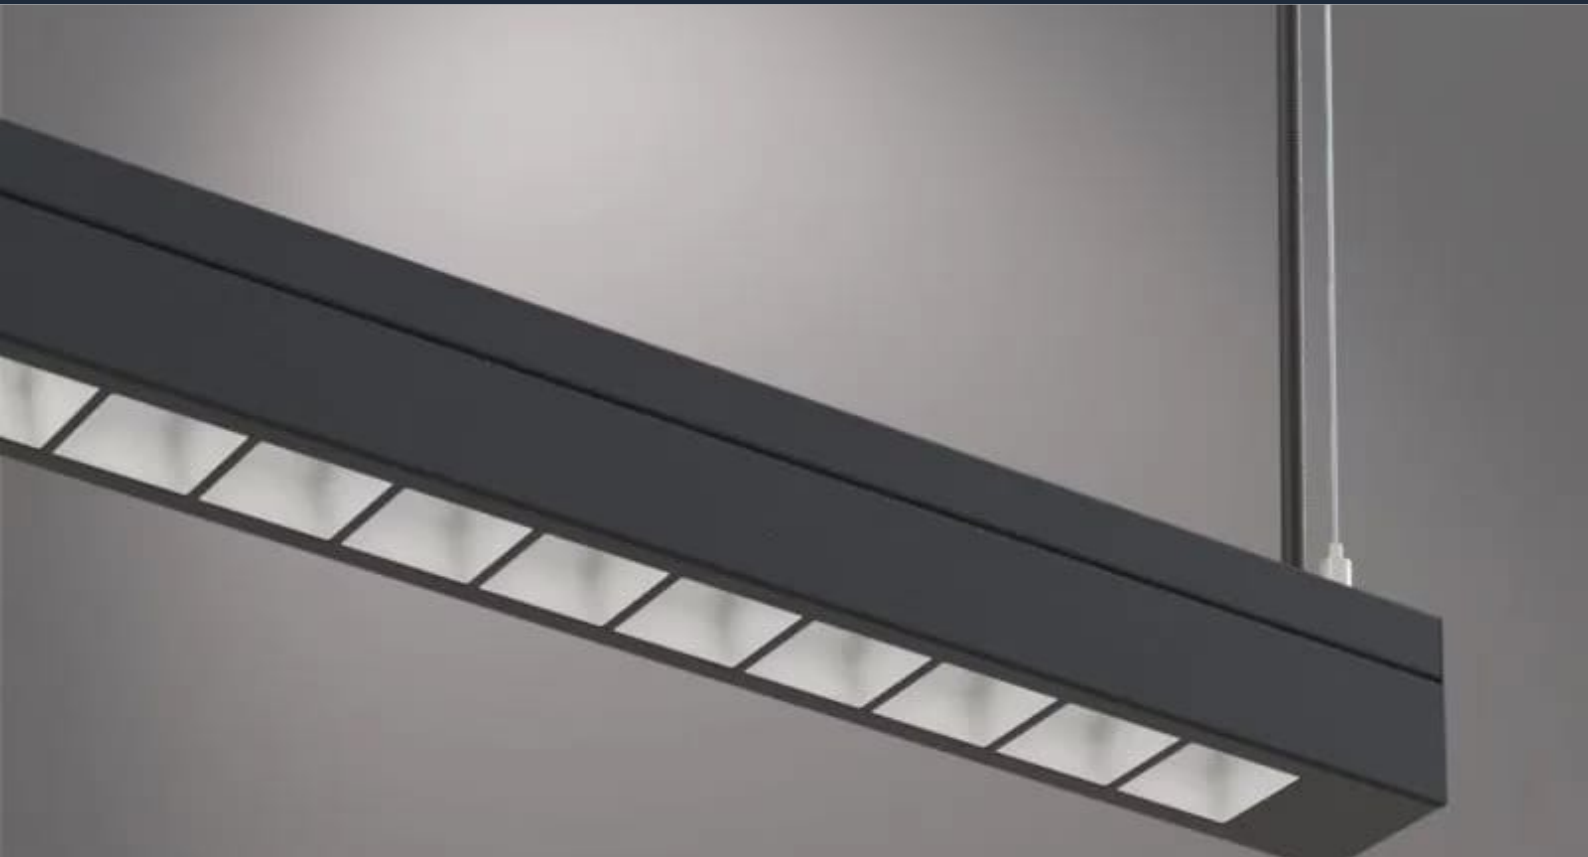

ATOMIS

Metronome-S black

Metronome-S black is a linear LED pendant luminaire fitted with 36 or 28 lenses, recessed behind a louvre grille. The optics are on the underside as standard, ...

CATEGORY

Pendant luminaires

MOUNTING

Pendant

IP CLASS

IP20 (boven) / IP20 (onder)

COLOUR TEMPERATURE

**2700K, 3000K, 4000K, Tunable
white, op aanvraag**

CRI

CRI80, CRI90

UGR

<19

Introduction

Metronome-S black is a linear LED pendant luminaire fitted with 36 or 28 lenses, recessed behind a louvre grille. The optics are on the underside as standard, ...

With the Metronome-S Black, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Features


- Architectural appearance with 36 or 28 optics
- Choice between UGR < 19 and UGR < 16 optics
- Louvre finish in white or black
- Direct and indirect (UP/DOWN) versions available


Technical specifications

Mounting	Pendant
Application	Kantoren, Zorg, Education, Public spaces, Vrijtjidssector
Dimensions	On request
Material	Staal (behuizing)
Optics	Lens met Louver
UGR	<19
IP class	IP20 (boven) / IP20 (onder)
CRI	CRI80, CRI90
CCT	2700K, 3000K, 4000K, Tunable white, On request
Control	aan/uit, DALI-2, 1-10v, Casambi, On request
Emergency lighting	1-hour emergency power, 1 uur autonomie autotest
Voltage / freq.	220-240V, 50 / 60Hz
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class I
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Colour	RAL9016, RAL9005, On request
Brand	Atomis
Category	Pendant luminaires

Product photos

Atmosphere and product images

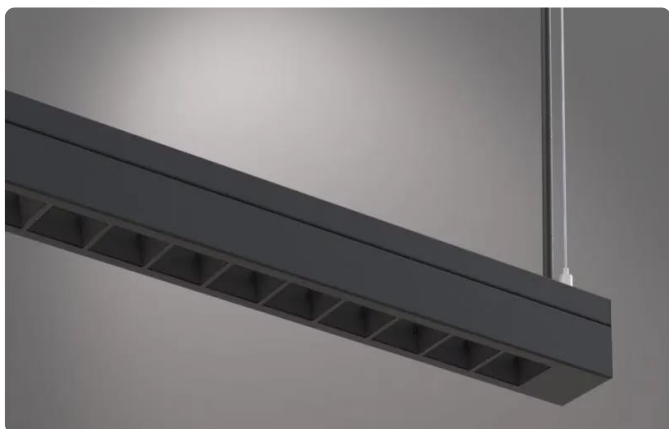

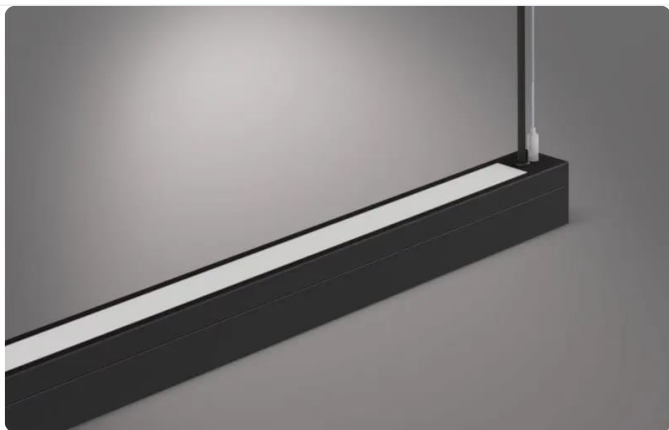

Specification text

Metronome-S black is a linear LED pendant luminaire fitted with 36 or 28 lenses, recessed behind a louvre grille. The optics are on the underside as standard, and direct/indirect (UP/DOWN) versions are also available. A choice can be made between UGR < 19 optics (standard) and UGR < 16. - Architectural appearance with 36 or 28 optics - Choice between UGR < 19 and UGR < 16 optics - Louvre finish in white or black - Direct and indirect (UP/DOWN) versions available

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 10 September 2026