

**ATOMIS**

# Miro-M 600x600 Model 1

Miro-M 600x600 Model 1 is a square LED luminaire with 32 recessed lenses placed behind a louvre grille. This innovative luminaire provides effective lighting a...

**CATEGORY**

**Recessed & lay-in luminaires**

**MOUNTING**

**Recessed**

**IP CLASS**

**IP20 (naar boven)/IP40 (naar beneden)**

**COLOUR TEMPERATURE**

**2700K, 3000K, 3500K, 4000K, Tunable White**

**UGR**

**<19**

## Introduction

Miro-M 600x600 Model 1 is a square LED luminaire with 32 recessed lenses placed behind a louvre grille. This innovative luminaire provides effective lighting a...

With the Miro-M 600x600 Model 1, you choose architectural lighting that unites design and light quality. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

---

## Features

Architectural design with 32 optics

Choice between UGR < 19 and UGR < 16 optics

Louvre in matt black and matt white


Flat design for low ceiling depths

## Technical specifications

Mounting	<b>Recessed</b>
Material	<b>Acrylic, Steel</b>
Optics	<b>Lens and louvre</b>
UGR	<b>&lt;19</b>
IP class	<b>IP20 (naar boven)/IP40 (naar beneden)</b>
CCT	<b>2700K, 3000K, 3500K, 4000K, Tunable White</b>
Control	<b>1-10V dimmable, Casambi dimmable, DALI dimmable, Optional</b>
Emergency lighting	<b>1-hour emergency power, Optional, Optional 1-hour autonomy self-test</b>
Efficiency	<b>&gt;140lm/W</b>
Photobiological safety	<b>IEC 62471: RG1 (low risk)</b>
Insulation class	<b>Class II</b>
Power factor	<b>&gt;0.9</b>
Ambient temperature	<b>-20°C / +40°C</b>
Options	<b>93 100 100 100 100, Attached to the luminaire, BST 14i2, Europlug, GST18i3, GST18i5 pastelblauw, L90B50@60, 000h (Tq 25°C), Remote driver, Downward, On request, On the driver, Optional, SDCM=3, Square</b>
Brand	<b>Atomis</b>
Category	<b>Recessed &amp; lay-in luminaires</b>

## Technical drawings

Dimensions and line art — not to scale

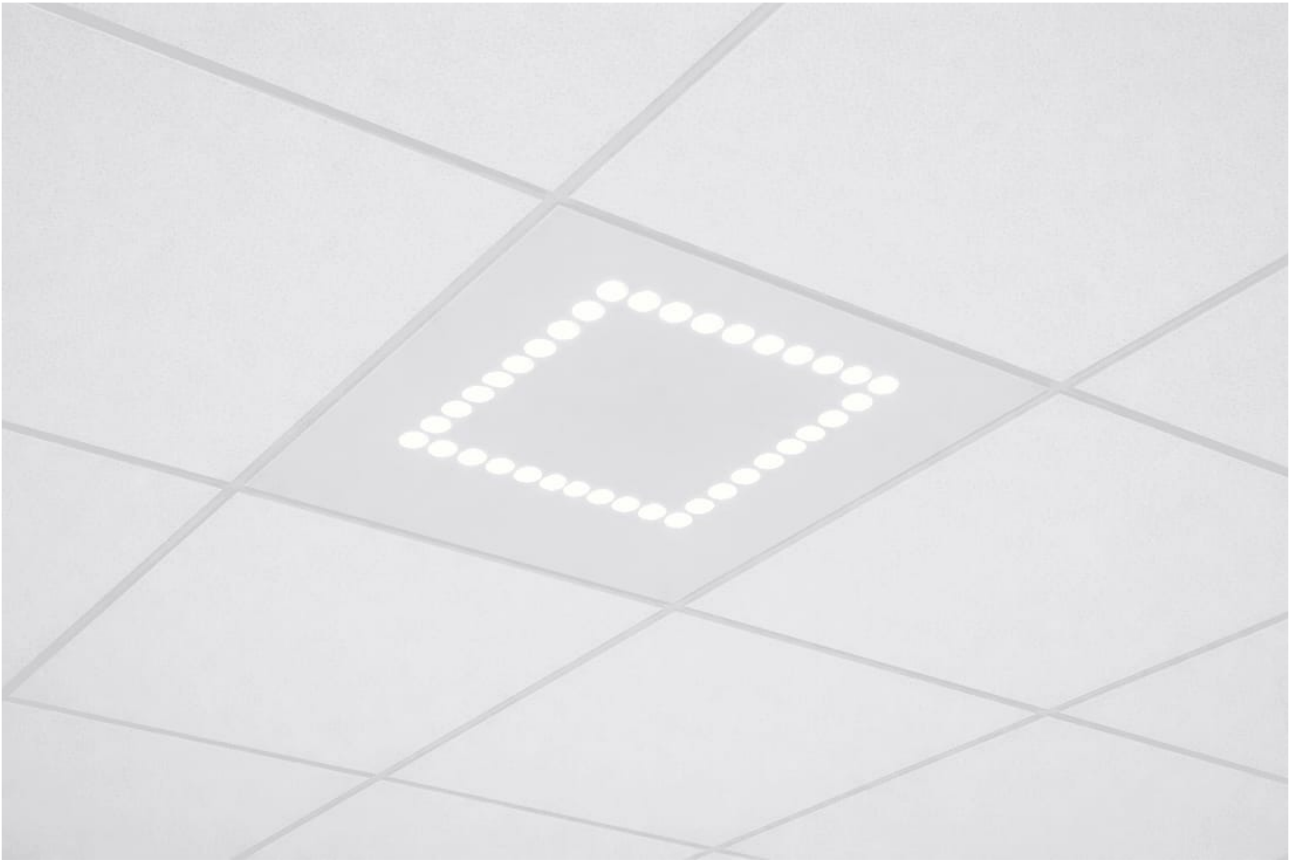

Photometric drawing

## Specification text

Miro-M 600x600 Model 1 is a square LED luminaire with 32 recessed lenses placed behind a louvre grille. This innovative luminaire provides effective lighting and adds elegance to any architectural environment. Customers can choose between two different optics: the standard UGR < 19 or the UGR < 16. The luminaires are made of powder-coated steel and are custom-made for each ceiling system. - Architectural design with 32 optics - Choice between UGR < 19 and UGR < 16 optics - Louvre in matt black and matt white - Flat design for low ceiling depths

## Information

### Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

---

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 5 July 2026