



ATOMIS

Myos-M Multioptic® linear

Myos-M Multioptic® Linear is a range of innovative recessed luminaires with mid-power LED modules using Multioptic® lens technology, specially designed for use...

CATEGORY

Recessed & lay-in luminaires

MOUNTING

Recessed

IP CLASS

IP20 (naar boven)/IP40 (naar beneden)

COLOUR TEMPERATURE

3000K, 4000K

CRI

CRI80, CRI90

UGR

<19

Introduction

Myos-M Multioptic® Linear is a range of innovative recessed luminaires with mid-power LED modules using Multioptic® lens technology, specially designed for use...

With the Myos-M Multioptic® linear, you choose architectural lighting that unites design and light quality. Designed for hospitality, office, education, public spaces, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Features

Integrates seamlessly into exposed grid ceilings

Architectural design


Fitted with 99 lenses (UGR < 16–19)

Technical specifications

Mounting	Recessed
Application	Hospitality, Office, Education, Public spaces
Material	Acrylic, Steel
Optics	Multioptic® lens technology
UGR	<19
IP class	IP20 (naar boven)/IP40 (naar beneden)
CRI	CRI80, CRI90
CCT	3000K, 4000K
Control	1-10V dimmable, Casambi dimmable, DALI dimmable, Optional
Emergency lighting	1-hour emergency power, Optional, Optional 1-hour autonomy self-test
Efficiency	>140lm/W
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class II
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Options	Attached to the luminaire, Remote driver, Optional, BST 14i2, Europlug, GST18i3, GST18i5 pastelblauw, On request, On the driver
Brand	Atomis
Category	Recessed & lay-in luminaires

Product photos

Atmosphere and product images

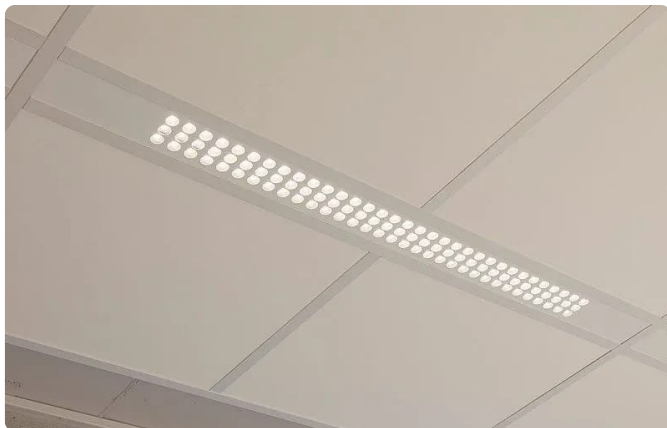

ruimteverdeling		receptieve breedte					receptieve hoogte				
X	Y	t.o.v. lampen					t.o.v. lampen				
2H	2H	18.4	19.3	18.6	19.5	19.7	18.3	19.2	18.6	19.5	19.7
	3H	18.5	19.3	18.8	19.6	19.8	18.5	19.3	18.8	19.5	19.8
	4H	18.5	19.3	18.9	19.6	19.9	18.5	19.3	18.8	19.6	19.8
	6H	18.6	19.3	19.0	19.6	19.9	18.6	19.3	18.9	19.6	19.9
	8H	18.7	19.3	19.0	19.7	20.0	18.6	19.3	19.0	19.6	19.9
	12H	18.7	19.3	19.1	19.7	20.0	18.7	19.3	19.0	19.6	20.0
4H	2H	18.3	19.1	18.7	19.4	19.7	18.3	19.1	18.6	19.4	19.6
	3H	18.5	19.2	18.9	19.5	19.8	18.5	19.2	18.9	19.5	19.8
	4H	18.7	19.2	19.1	19.6	19.9	18.7	19.2	19.0	19.6	19.9
	6H	18.8	19.3	19.2	19.7	20.1	18.8	19.3	19.2	19.7	20.1
	8H	18.9	19.3	19.3	19.7	20.2	18.9	19.3	19.3	19.7	20.2
	12H	19.0	19.4	19.4	19.8	20.2	19.0	19.4	19.4	19.8	20.2
8H	4H	18.7	19.1	19.1	19.5	19.9	18.6	19.1	19.1	19.5	19.9
	6H	18.9	19.2	19.3	19.7	20.1	18.9	19.2	19.4	19.7	20.1
	8H	19.0	19.3	19.5	19.8	20.3	19.0	19.3	19.5	19.8	20.3
	12H	19.1	19.4	19.6	19.8	20.4	19.2	19.4	19.7	19.9	20.4
12H	4H	18.6	19.0	19.1	19.4	19.9	18.6	19.0	19.1	19.4	19.9
	6H	18.9	19.2	19.4	19.6	20.1	18.9	19.2	19.4	19.6	20.1
	8H	19.0	19.3	19.5	19.8	20.3	19.0	19.3	19.5	19.8	20.3
Variatie op waarnemerpositie voor lampafstanden 5											
S = 1.0H		+1.0 / -1.7					+1.0 / -1.7				

Specification text

Myos-M Multioptic® Linear is a range of innovative recessed luminaires with mid-power LED modules using Multioptic® lens technology, specially designed for use with exposed system ceilings. The optical system contains a lens array of 99 mid-power LEDs behind a decorative aperture mask. - Integrates seamlessly into exposed grid ceilings - Architectural design - Fitted with 99 lenses (UGR < 16–19)

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 24 August 2026