


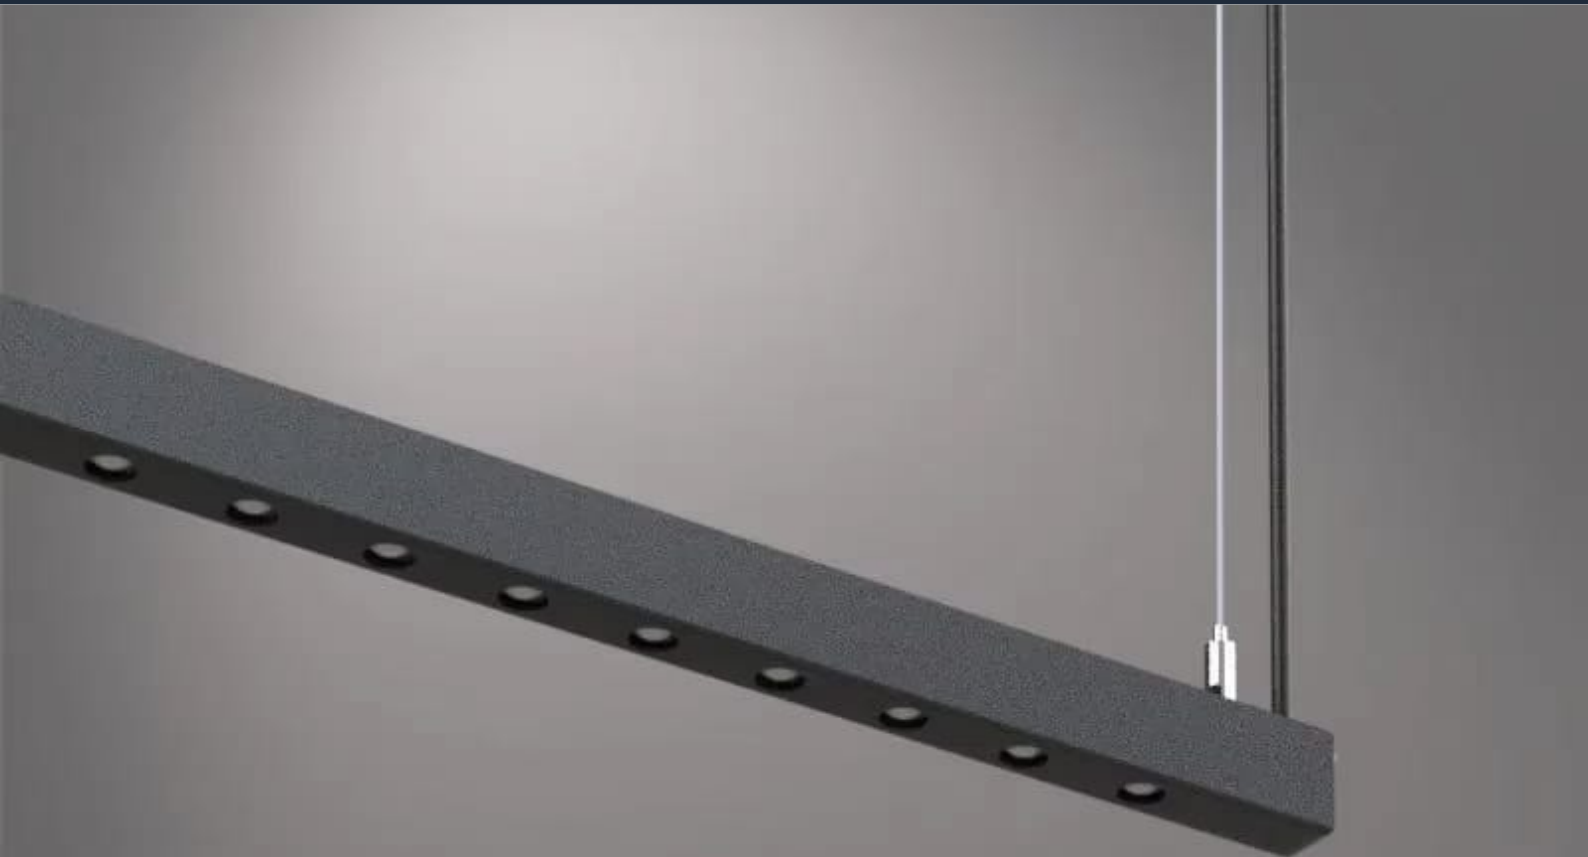

ATOMIS

# Sirio-S 900

Sirio-S 900 is a suspended luminaire from the Sirio range by Atomis. The luminaire is suspended, directed downward and fitted with a lens with louvre. The range is intended for offices, healthcare, education, public spaces and leisure venues.

CATEGORY

**Pendant luminaires**

MOUNTING

**Pendant**

IP CLASS

**IP20 (boven) / IP20 (onder)**

COLOUR TEMPERATURE

**3000K, 4000K**

CRI

**CRI80, CRI90**

UGR

**<19**

## Introduction

Sirio-S 900 is a suspended luminaire from the Sirio range by Atomis. The luminaire is suspended, directed downward and fitted with a lens with louvre. The range is intended for offices, healthcare, education, public spaces and leisure venues.

With the Sirio-S 900, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

## Technical specifications

|                        |                                                                  |
|------------------------|------------------------------------------------------------------|
| Mounting               | <b>Pendant</b>                                                   |
| Application            | <b>Kantoren, Zorg, Education, Public spaces, Vrijtjidssector</b> |
| Dimensions             | <b>21x900mm</b>                                                  |
| Material               | <b>Staal (behuizing)</b>                                         |
| Optics                 | <b>Lens met Louver</b>                                           |
| UGR                    | <b>&lt;19</b>                                                    |
| IP class               | <b>IP20 (boven) / IP20 (onder)</b>                               |
| CRI                    | <b>CRI80, CRI90</b>                                              |
| CCT                    | <b>3000K, 4000K</b>                                              |
| Control                | <b>aan/uit, DALI-2, 1-10v, Casambi, On request</b>               |
| Emergency lighting     | <b>1-hour emergency power, 1 uur autonomie autotest</b>          |
| Voltage / freq.        | <b>220-240V, 50 / 60Hz</b>                                       |
| Photobiological safety | <b>IEC 62471: RG1 (low risk)</b>                                 |
| Insulation class       | <b>Class II</b>                                                  |
| Power factor           | <b>&gt;0.9</b>                                                   |
| Ambient temperature    | <b>-20°C / +40°C</b>                                             |
| Colour                 | <b>RAL9016, RAL9005, On request</b>                              |
| Brand                  | <b>Atomis</b>                                                    |
| Category               | <b>Pendant luminaires</b>                                        |

## Product photos

Atmosphere and product images



## Specification text

Sirio-S 900 is a suspended luminaire from the Sirio range by Atomis. The luminaire is suspended, directed downward and fitted with a lens with louvre. The range is intended for offices, healthcare, education, public spaces and leisure venues.

## Information

### Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information held in the Atomis luminaire database. Specifications may vary per project configuration.

---

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 6 September 2026