

ATOMIS

Sirio-S white

Sirio-S white is an elegant, slim LED pendant luminaire fitted with a row of mid-power LEDs, each with an individual lens and louvre.

CATEGORY

Climate ceiling luminaires, Baffle luminaires

MOUNTING

Pendant

IP CLASS

IP20 (naar boven)/IP40 (naar beneden)

COLOUR TEMPERATURE

2700K, 3000K, 3500K, 4000K, Tunable White

CRI

CR180, CR190

UGR

<19

Introduction

Sirio-S white is an elegant, slim LED pendant luminaire fitted with a row of mid-power LEDs, each with an individual lens and louvre.

With the Sirio-S white, you choose architectural lighting that unites design and light quality. Designed for hospitality, office, education, public spaces, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Features

Identical design to Sirio SAPP® ceiling luminaires

Slim design available in three lengths: 880, 1200 and 1520 mm


Low-glare light distribution (UGR < 19) suitable for use in office environments

Technical specifications

Mounting	Pendant
Application	Hospitality, Office, Education, Public spaces
Material	Acrylic, Steel
Optics	Lens and louvre
UGR	<19
IP class	IP20 (naar boven)/IP40 (naar beneden)
CRI	CRI80, CRI90
CCT	2700K, 3000K, 3500K, 4000K, Tunable White
Control	1-10V dimmable, Casambi dimmable, DALI dimmable, Optional
Emergency lighting	1-hour emergency power, Optional, Optional 1-hour autonomy self-test
Efficiency	>125lm/W
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class II
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Options	Remote driver, Optional, Cable, On request, On the driver
Brand	Atomis
Category	Climate ceiling luminaires, Baffle luminaires

Product photos


Atmosphere and product images — technical drawings are on a separate page

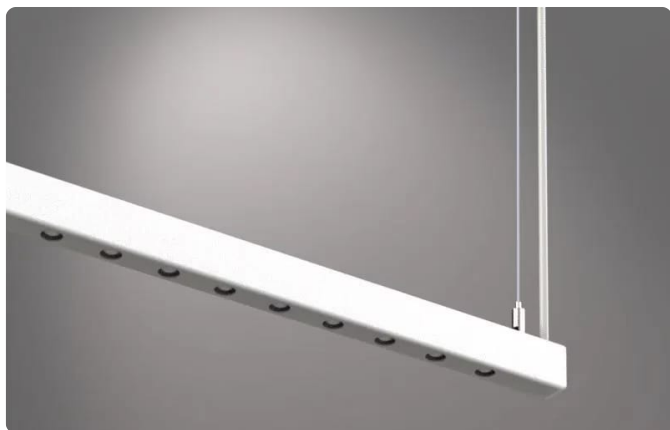


X	Y	to lamp axis					to lamp axis				
2H	2H	18.7	19.4	18.9	19.6	19.8	18.3	19.0	18.5	19.2	19.4
	3H	18.6	19.2	18.8	19.4	19.7	18.1	18.8	18.4	19.0	19.2
	4H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2
	6H	18.4	19.0	18.7	19.2	19.5	18.0	18.5	18.3	18.8	19.1
	8H	18.4	18.9	18.7	19.2	19.5	18.0	18.5	18.3	18.8	19.1
	12H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0
4H	2H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2
	3H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0
	4H	18.3	18.7	18.6	19.0	19.4	17.9	18.3	18.2	18.6	19.0
	6H	18.2	18.6	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9
	8H	18.2	18.5	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9
	12H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.2	18.4	18.8
8H	4H	18.2	18.5	18.6	18.9	19.3	17.7	18.1	18.2	18.4	18.8
	6H	18.1	18.3	18.5	18.7	19.2	17.7	17.9	18.1	18.3	18.8
	8H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7
	12H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7
12H	4H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.1	18.4	18.8
	6H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7
	8H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7
Variation of the observer position for the luminaire distances S											
S = 1.0H		+3.8 / -12.2					+4.7 / -13.4				


Technical drawings

Dimensions and line art — not to scale



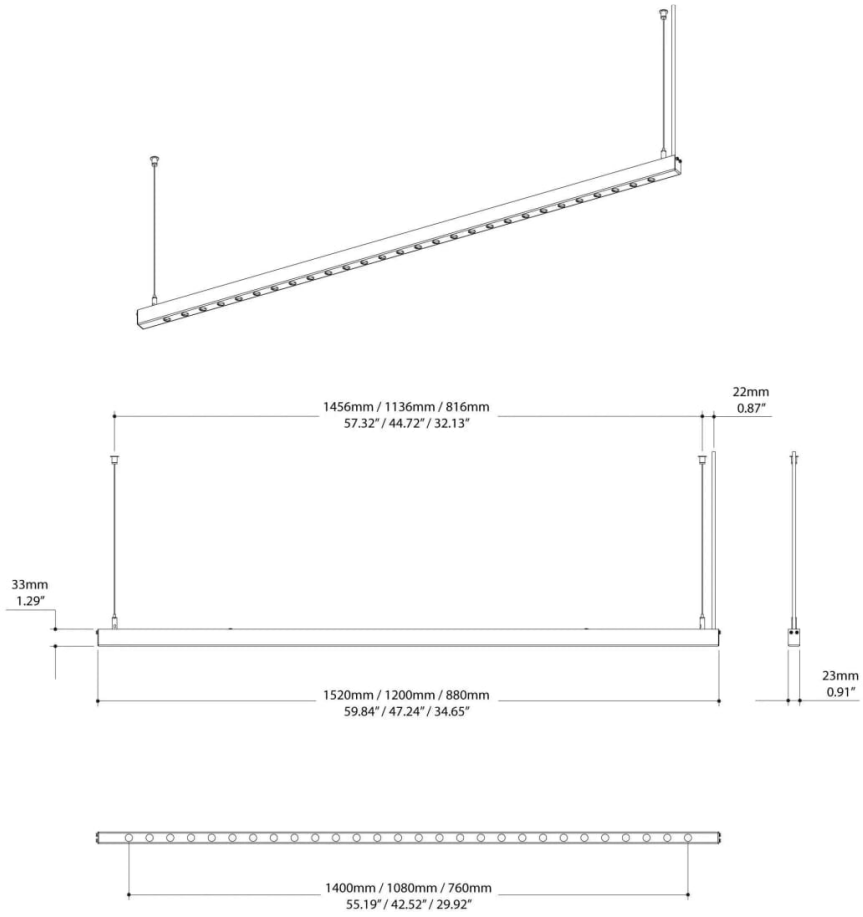

Photometric drawing

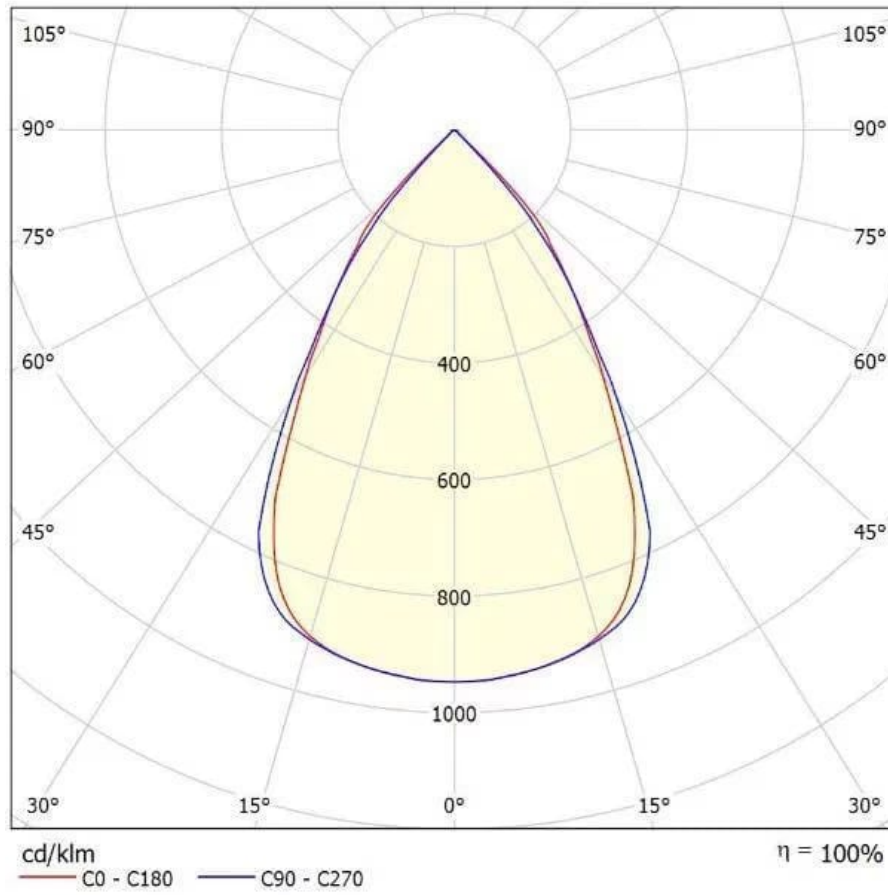

Photometric drawing

Photometric drawing

Specification text

Sirio-S white is an elegant, slim LED pendant luminaire fitted with a row of mid-power LEDs, each with an individual lens and louvre. - Identical design to Sirio SAPP® ceiling luminaires - Slim design available in three lengths: 880, 1200 and 1520 mm
- Low-glare light distribution (UGR < 19) suitable for use in office environments

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 9 July 2026