



ATOMIS

Sirio SAPP 1500

Linear luminaire with lenses for use in Interlu SAPP ceilings, designed for integration between the ceiling structures.

CATEGORY

Climate ceiling luminaires

MOUNTING

Recessed

IP CLASS

IP20 (naar boven)/IP40 (naar beneden)

COLOUR TEMPERATURE

Tunable White, 2700K, 3000K, 3500K, 4000K

CRI

CRI80, CRI90

UGR

UGR kleiner dan 19

Introduction

Linear luminaire with lenses for use in Interlu SAPP ceilings, designed for integration between the ceiling structures.

With the Sirio SAPP 1500, you choose architectural lighting that unites design and light quality. Designed for hospitality, office, education, public spaces, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Technical specifications

Mounting	Recessed
Application	Hospitality, Office, Education, Public spaces
Dimensions	1500 mm lengte
Material	Acrylic, Steel
Optics	Lens and louvre
UGR	UGR kleiner dan 19
IP class	IP20 (naar boven)/IP40 (naar beneden)
CRI	CRI80, CRI90
CCT	Tunable White, 2700K, 3000K, 3500K, 4000K
Luminous flux	2000 lm tot 4400 lm, afhankelijk van configuratie
Control	1-10V dimmable, Casambi dimmable, DALI dimmable, Optional
Emergency lighting	1-hour emergency power, Optional, Optional 1-hour autonomy self-test
Efficiency	>125lm/W
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class II
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Options	Vrije positionering in afgewerkt plafond zonder onderbreking van het actieve klimaatsysteem.
Brand	Atomis
Category	Climate ceiling luminaires

Product photos

Atmosphere and product images — technical drawings are on a separate page




X	Y	to lamp axis					to lamp axis				
2H	2H	18.7	19.4	18.9	19.6	19.8	18.3	19.0	18.5	19.2	19.4
	3H	18.6	19.2	18.8	19.4	19.7	18.1	18.8	18.4	19.0	19.2
	4H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2
	6H	18.4	19.0	18.7	19.2	19.5	18.0	18.5	18.3	18.8	19.1
	8H	18.4	18.9	18.7	19.2	19.5	18.0	18.5	18.3	18.8	19.1
	12H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0
4H	2H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2
	3H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0
	4H	18.3	18.7	18.6	19.0	19.4	17.9	18.3	18.2	18.6	19.0
	6H	18.2	18.6	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9
	8H	18.2	18.5	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9
	12H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.2	18.4	18.8
8H	4H	18.2	18.5	18.6	18.9	19.3	17.7	18.1	18.2	18.4	18.8
	6H	18.1	18.3	18.5	18.7	19.2	17.7	17.9	18.1	18.3	18.8
	8H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7
	12H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7
	4H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.1	18.4	18.8
12H	6H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7
	8H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7
	8H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7

Variation of the observer position for the luminaire distances 5


S = 1.0H	+3.8 / -12.2	+4.7 / -13.4
----------	--------------	--------------

Technical drawings


Dimensions and line art — not to scale

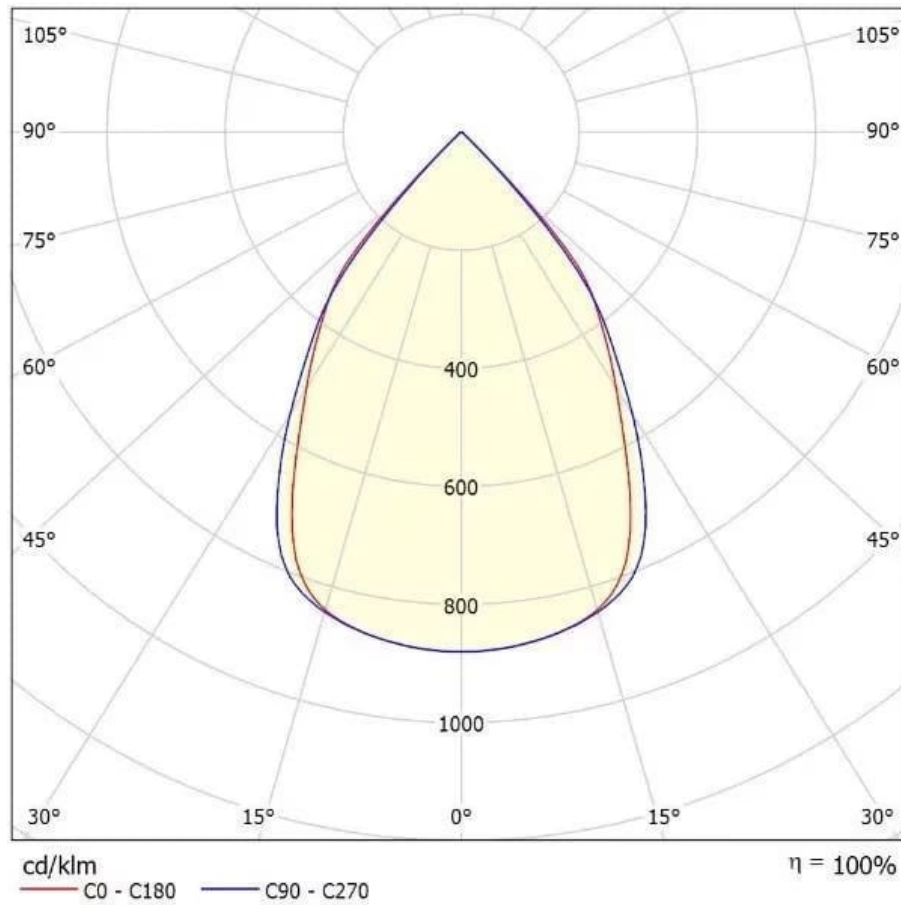


Photometric drawing

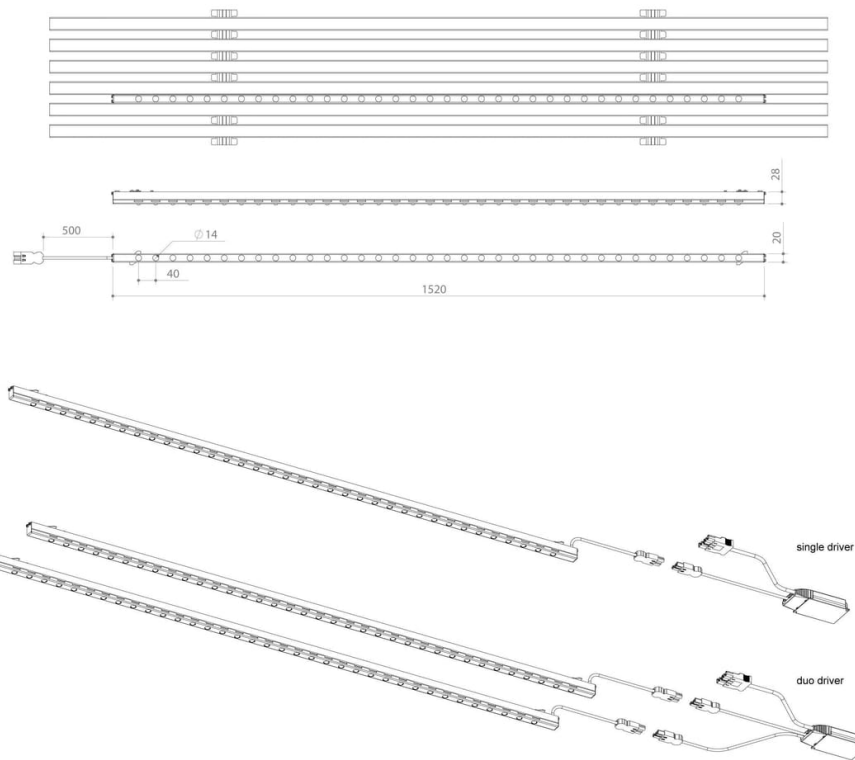

Photometric drawing

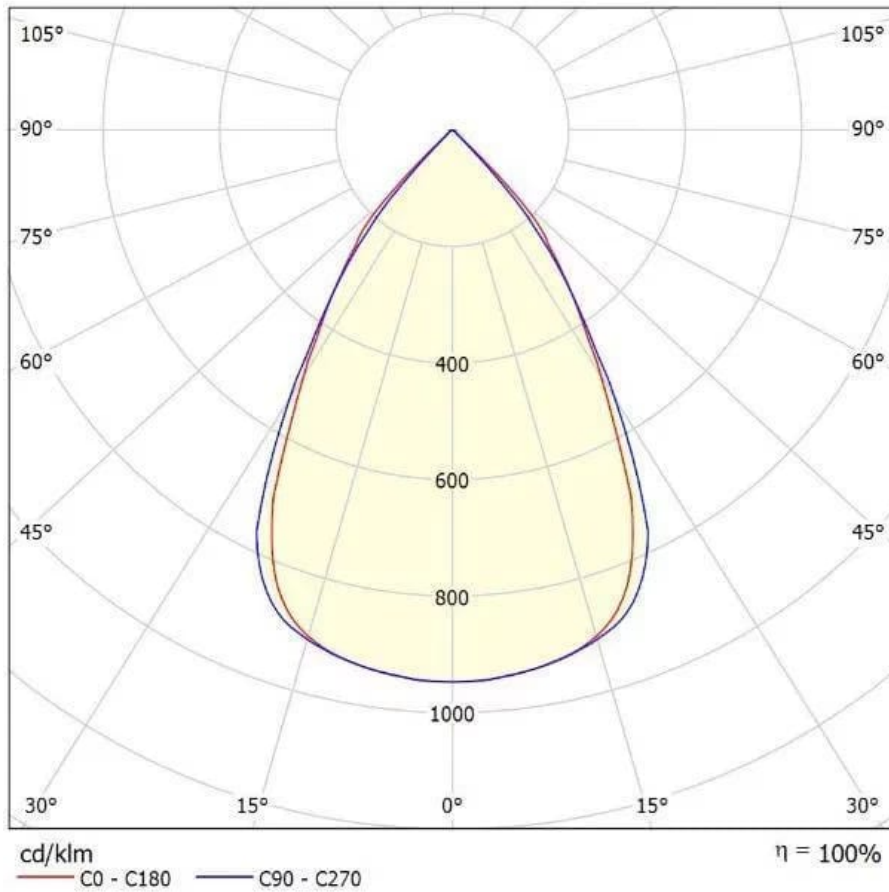

Photometric drawing

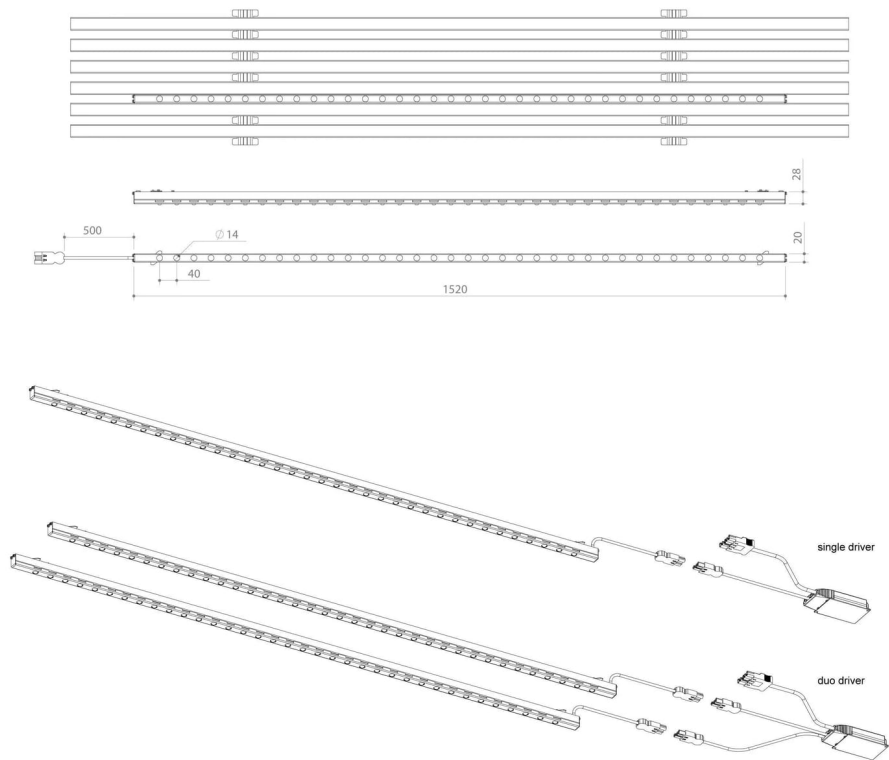

Technical drawing

Specification text

Sirio SAPP 1500 is a linear luminaire with lenses for use in Interlu SAPP ceilings. The luminaire can be placed between the structures, creating an integrated system with the ceiling without interrupting its architectural appearance. Thanks to its controlled light distribution, good uniformity and low glare, Sirio SAPP 1500 is suitable for professional work environments where visual comfort and ceiling integration come together.

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 9 July 2026