



ATOMIS

Sirio SAPP 600

A linear luminaire with lenses for use in Interlu SAPP® ceilings. Sirio SAPP 600 can be placed between the structures, creating an integrated system with the ...

CATEGORY

Climate ceiling luminaires, Baffle luminaires

MOUNTING

Recessed

IP CLASS

IP20 (naar boven)/IP40 (naar beneden)

COLOUR TEMPERATURE

2700K, 3000K, 3500K, 4000K, Tunable White

CRI

CR180, CR190

UGR

<19

Introduction

A linear luminaire with lenses for use in Interlu SAPP® ceilings. Sirio SAPP 600 can be placed between the structures, creating an integrated system with the ...

With the Sirio SAPP 600, you choose architectural lighting that unites design and light quality. Designed for hospitality, office, education, public spaces, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Features

Can be placed anywhere in the ceiling between the SAPP® ceiling structures without interrupting the climate circuit

Provides a highly controlled light distribution, good uniformity and low UGR

The luminaire complies with EN 12464-1

Technical specifications

Mounting	Recessed
Application	Hospitality, Office, Education, Public spaces
Material	Acrylic, Steel
Optics	Lens and louvre
UGR	<19
IP class	IP20 (naar boven)/IP40 (naar beneden)
CRI	CRI80, CRI90
CCT	2700K, 3000K, 3500K, 4000K, Tunable White
Control	1-10V dimmable, Casambi dimmable, DALI dimmable, Optional
Emergency lighting	1-hour emergency power, Optional, Optional 1-hour autonomy self-test
Efficiency	>125lm/W
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class II
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Options	220-240V, 50 / 60Hz, 93 100 100 100 100, BST 14i2, Europlug, GST18i3, GST18i5 pastelblauw, L90B50@60, 000h (Tq 25°C), Remote driver, N/A, Downward, On request, On the driver, Rectangular, SDCM=3
Brand	Atomis
Category	Climate ceiling luminaires, Baffle luminaires

Product photos


Atmosphere and product images — technical drawings are on a separate page



X	Y	to lamp axis					to lamp axis				
2H	2H	18.7	19.4	18.9	19.6	19.8	18.3	19.0	18.5	19.2	19.4
	3H	18.6	19.2	18.8	19.4	19.7	18.1	18.8	18.4	19.0	19.2
	4H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2
	6H	18.4	19.0	18.7	19.2	19.5	18.0	18.5	18.3	18.8	19.1
	8H	18.4	18.9	18.7	19.2	19.5	18.0	18.5	18.3	18.8	19.1
	12H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0
4H	2H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2
	3H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0
	4H	18.3	18.7	18.6	19.0	19.4	17.9	18.3	18.2	18.6	19.0
	6H	18.2	18.6	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9
	8H	18.2	18.5	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9
	12H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.2	18.4	18.8
8H	4H	18.2	18.5	18.6	18.9	19.3	17.7	18.1	18.2	18.4	18.8
	6H	18.1	18.3	18.5	18.7	19.2	17.7	17.9	18.1	18.3	18.8
	8H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7
	12H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7
	4H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.1	18.4	18.8
12H	6H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7
	8H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7
	8H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7

Variation of the observer position for the luminaire distances 5

S = 1.0H	+3.8 / -12.2	+4.7 / -13.4
----------	--------------	--------------

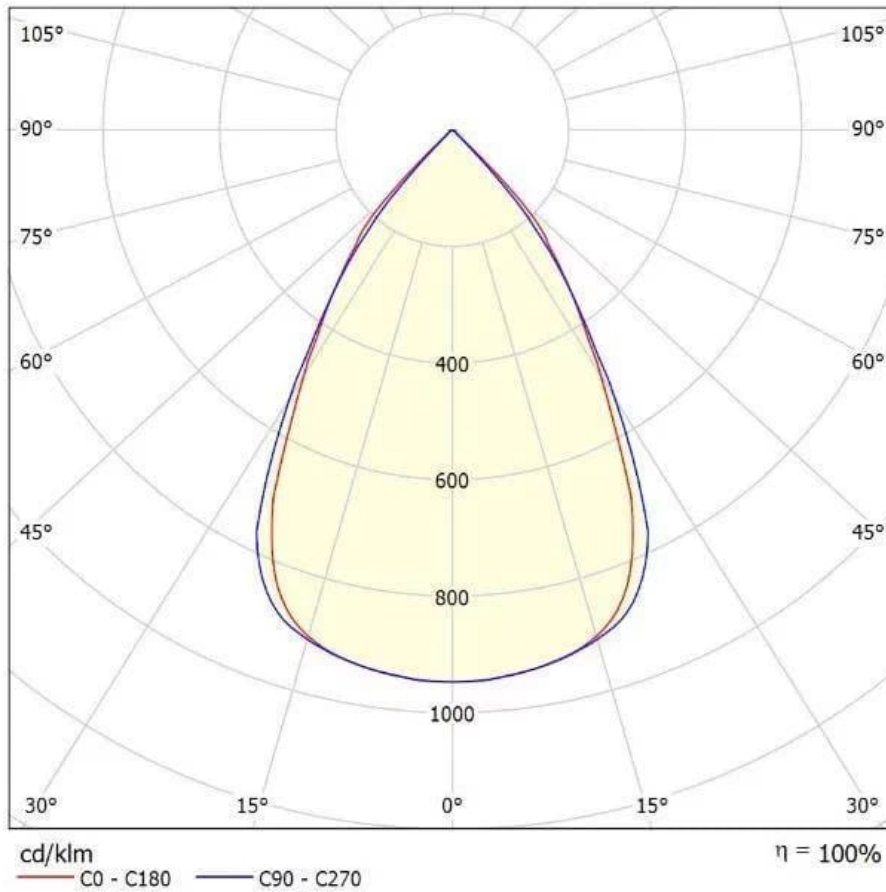

Photometric drawing

Specification text

A linear luminaire with lenses for use in Interlu SAPP® ceilings. Sirio SAPP 600 can be placed between the structures, creating an integrated system with the ceiling without interrupting its architectural appearance. - Can be placed anywhere in the ceiling between the SAPP® ceiling structures without interrupting the climate circuit - Provides a highly controlled light distribution, good uniformity and low UGR - The luminaire complies with EN 12464-1

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 9 July 2026