


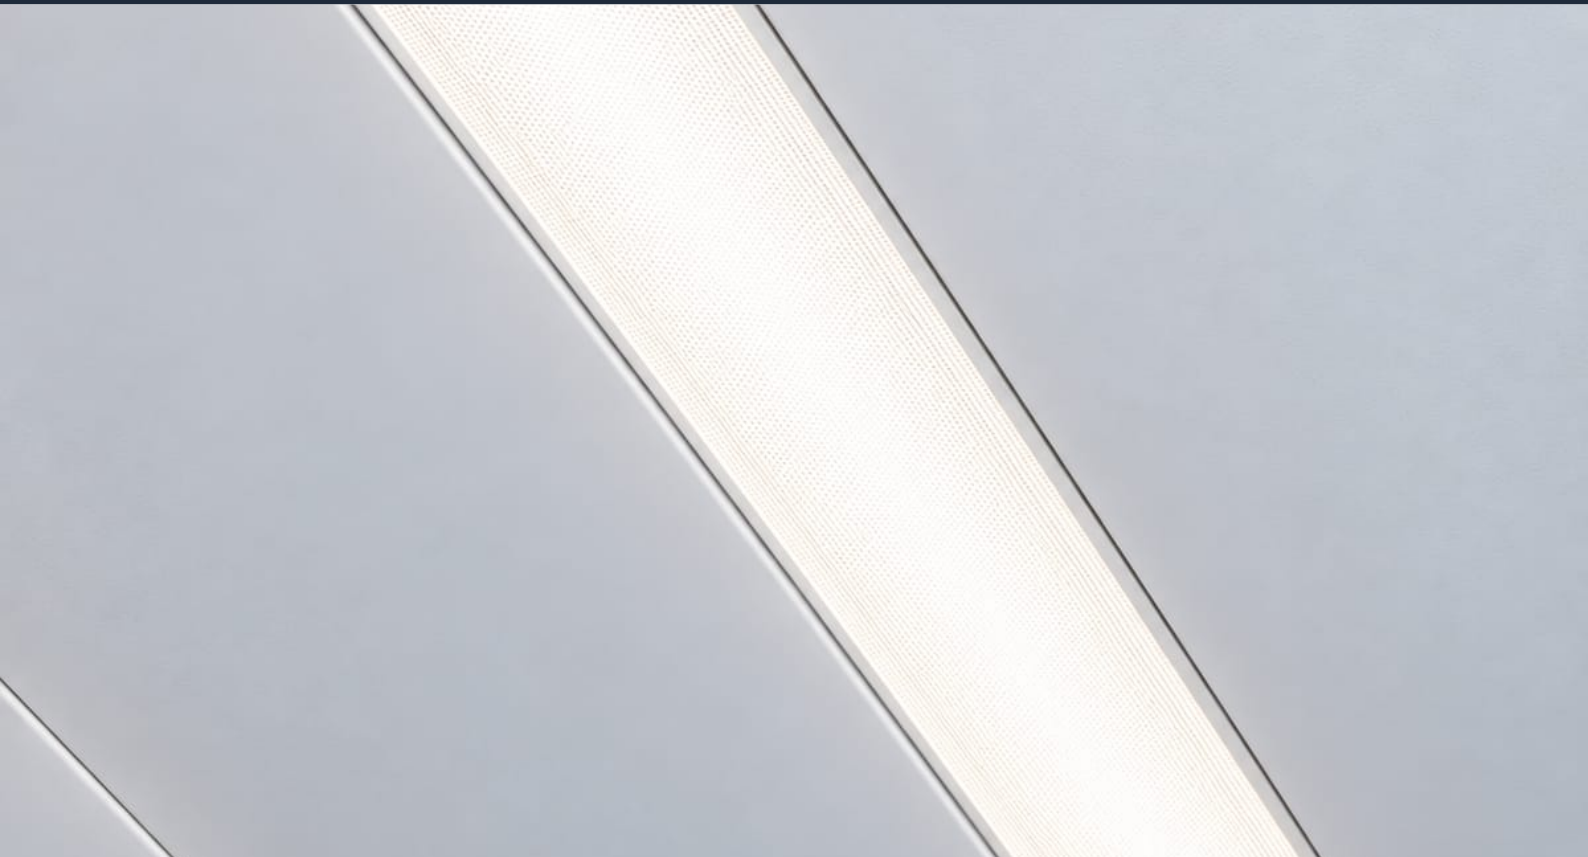

ATOMIS

# Stratos-B 70

Stratos-B 70 is a linear LED luminaire designed for use in climate ceilings with exposed grid ceilings. The luminaire is shielded by a microprismatic lens (wit...

CATEGORY

**Recessed & lay-in luminaires**

MOUNTING

**Inleg**

IP CLASS

**IP20 (boven) / IP20 (onder)**

COLOUR TEMPERATURE

**2700K, 3000K, 4000K, Tunable  
white, op aanvraag**

CRI

**CRI80, CRI90**

UGR

**<19**

## Introduction

Stratos-B 70 is a linear LED luminaire designed for use in climate ceilings with exposed grid ceilings. The luminaire is shielded by a microprismatic lens (wit...


With the Stratos-B 70, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

## Technical specifications

|                        |                                                                                                                                                                                                                                    |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mounting               | Inleg                                                                                                                                                                                                                              |
| Application            | Kantoren, Zorg, Education, Public spaces, Vrijtjidssector                                                                                                                                                                          |
| Dimensions             | On request                                                                                                                                                                                                                         |
| Material               | (gerecycled) Aluminium (behuizing)                                                                                                                                                                                                 |
| Optics                 | Microprisma                                                                                                                                                                                                                        |
| UGR                    | <19                                                                                                                                                                                                                                |
| IP class               | IP20 (boven) / IP20 (onder)                                                                                                                                                                                                        |
| CRI                    | CRI80, CRI90                                                                                                                                                                                                                       |
| CCT                    | 2700K, 3000K, 4000K, Tunable white, On request                                                                                                                                                                                     |
| Control                | aan/uit, DALI-2, 1-10v, Casambi, On request                                                                                                                                                                                        |
| Emergency lighting     | 1-hour emergency power, 1 uur autonomie autotest                                                                                                                                                                                   |
| Service life           | L90@50.000 uur                                                                                                                                                                                                                     |
| Voltage / freq.        | 220-240V, 50 / 60Hz                                                                                                                                                                                                                |
| Efficiency             | >140lm/W                                                                                                                                                                                                                           |
| Photobiological safety | IEC 62471: RG1 (low risk)                                                                                                                                                                                                          |
| Insulation class       | Class II                                                                                                                                                                                                                           |
| Power factor           | >0.9                                                                                                                                                                                                                               |
| Ambient temperature    | -20°C / +40°C                                                                                                                                                                                                                      |
| Colour                 | RAL9016, RAL9005, On request                                                                                                                                                                                                       |
| Options                | 220-240V, 50 / 60Hz, 93 100 100 100 100, Attached to the luminaire, BST 14i2, Europlug, GST18i3, GST18i5 pastelblauw, L90B50@60, 000h (Tq 25°C), Remote driver, Downward, On request, On the driver, Optional, Rectangular, SDCM=3 |
| Brand                  | Atomis                                                                                                                                                                                                                             |
| Category               | Recessed & lay-in luminaires                                                                                                                                                                                                       |

## Product photos

Atmosphere and product images

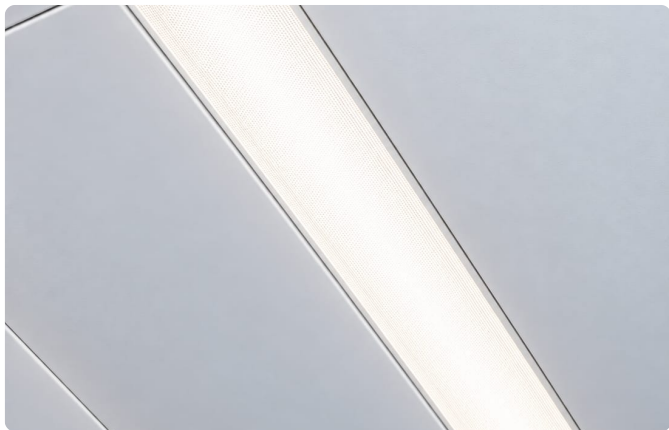

## Specification text

Stratos-B 70 is a recessed and lay-in luminaire from the Stratos range by Atomis. The luminaire is lay-in, directed downward and fitted with a microprismatic optic. The range is intended for offices, healthcare, education, public spaces and leisure venues.

## Information

### Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information held in the Atomis luminaire database. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 2 October 2026