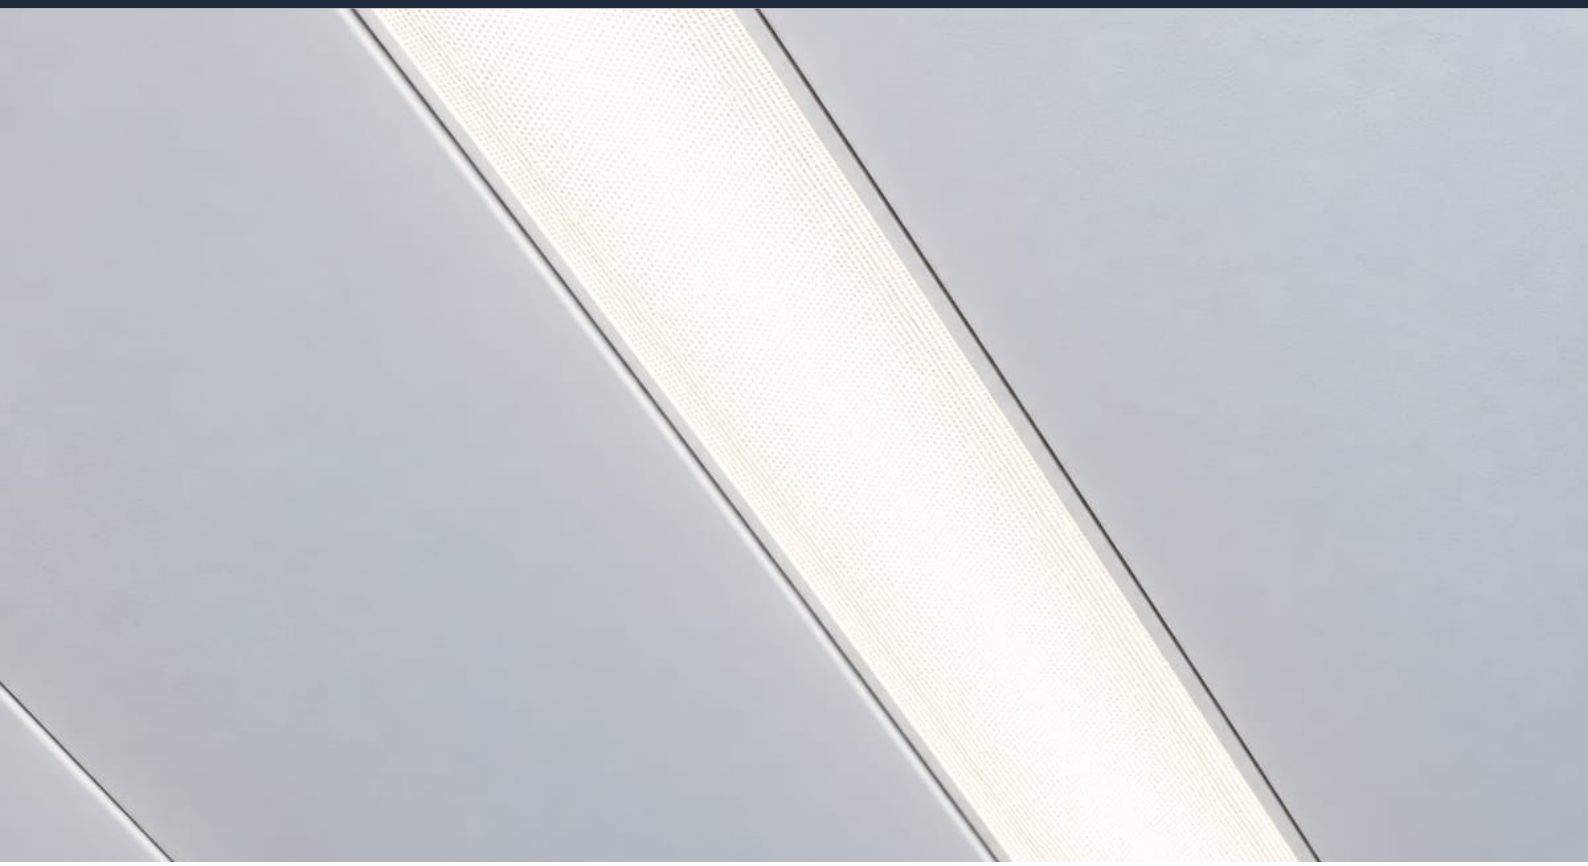


ATOMIS

# Stratos-K 100

Stratos-K 100 is a linear LED luminaire designed for use in climate ceilings with exposed grid ceilings. The luminaire is shielded by a microprism lens (with l…

| CATEGORY | MOUNTING | IP CLASS |
|---|---|---|
| **Climate ceiling luminaires** | **Inleg** | **IP20 (boven) / IP20 (onder)** |
| **COLOUR TEMPERATURE** | **CRI** | **UGR** |
| **2700K, 3000K, 4000K, Tunable white, op aanvraag** | **CRI80, CRI90** | **<19** |

## Introduction

Stratos-K 100 is a linear LED luminaire designed for use in climate ceilings with exposed grid ceilings. The luminaire is shielded by a microprism lens (with l…

With the Stratos-K 100, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

---

## Features

- Powder-coated aluminium construction
- Fitted with a prismatic lens (low UGR)
- Tunable white or melanopic lighting versions available
- C-hook mounting allows easy installation
- Suitable for use in offices, schools, care centres and other public facilities.

# Technical specifications

| | |
|---|---|
| Mounting | **Inleg** |
| Application | **Kantoren, Zorg, Education, Public spaces, Vrijetijdssector** |
| Dimensions | **On request** |
| Material | **(gerecycled) Aluminium (behuizing)** |
| Optics | **Microprisma** |
| UGR | **<19** |
| IP class | **IP20 (boven) / IP20 (onder)** |
| CRI | **CRI80, CRI90** |
| CCT | **2700K, 3000K, 4000K, Tunable white, On request** |
| Control | **aan/uit, DALI-2, 1-10v, Casambi, On request** |
| Emergency lighting | **1-hour emergency power, 1 uur autonomie autotest** |
| Service life | **L90@50.000 uur** |
| Voltage / freq. | **220-240V, 50 / 60Hz** |
| Photobiological safety | **IEC 62471: RG1 (low risk)** |
| Insulation class | **Class II** |
| Power factor | **>0.9** |
| Ambient temperature | **-20°C / +40°C** |
| Colour | **RAL9016, RAL9005, On request** |
| Brand | **Atomis** |
| Category | **Climate ceiling luminaires** |

# Product photos

Atmosphere and product images



## Specification text

Stratos-K 100 is a linear LED luminaire designed for use in climate ceilings with exposed grid ceilings. The luminaire is shielded by a microprism lens (with low UGR). - Powder-coated aluminium construction - Fitted with a prismatic lens (low UGR) - Tunable white or melanopic lighting versions available - C-hook mounting allows easy installation - Suitable for use in offices, schools, care centres and other public facilities.

# Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

---

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 7 November 2026