

ATOMIS

Stratos-Y 70

Stratos-Y 70 is a linear luminaire for use in panel ceilings and climate ceilings, with a prismatic lens or opal diffuser.

CATEGORY **Climate ceiling luminaires**	MOUNTING **Inleg**	IP CLASS **IP20 (boven) / IP20 (onder)**
COLOUR TEMPERATURE **2700K, 3000K, 4000K, Tunable white, op aanvraag**	CRI **CRI80, CRI90**	UGR **<19**

Introduction

Stratos-Y 70 is a linear luminaire for use in panel ceilings and climate ceilings, with a prismatic lens or opal diffuser.

With the Stratos-Y 70, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Features

- Lightweight construction
- Easy installation in a prefabricated ceiling opening
- Available in several lengths
- With a microprismatic lens (UGR d 19 for office use) or opal diffuser

Technical specifications


Mounting	**Inleg**
Application	**Kantoren, Zorg, Education, Public spaces, Vrijetijdssector**
Dimensions	**On request**
Material	**(gerecycled) Aluminium (behuizing)**
Optics	**Microprisma**
UGR	**<19**
IP class	**IP20 (boven) / IP20 (onder)**
CRI	**CRI80, CRI90**
CCT	**2700K, 3000K, 4000K, Tunable white, On request**
Control	**aan/uit, DALI-2, 1-10v, Casambi, On request**
Emergency lighting	**1-hour emergency power, 1 uur autonomie autotest**
Service life	**L90@50.000 uur**
Voltage / freq.	**220-240V, 50 / 60Hz**
Photobiological safety	**IEC 62471: RG1 (low risk)**
Insulation class	**Class II**
Power factor	**>0.9**
Ambient temperature	**-20°C / +40°C**
Colour	**RAL9016, RAL9005, On request**
Brand	**Atomis**
Category	**Climate ceiling luminaires**

Product photos

Atmosphere and product images





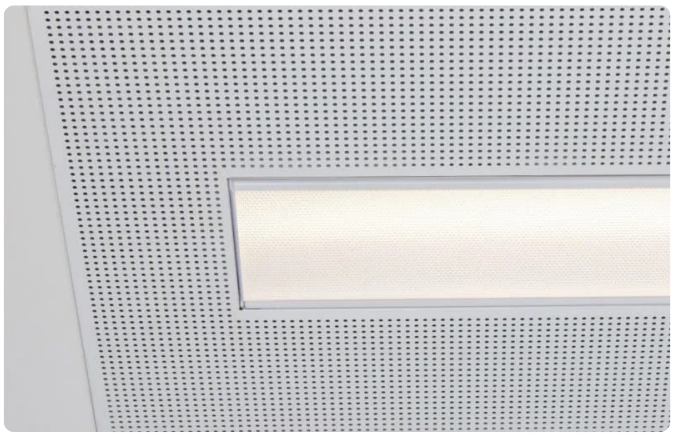

Specification text

Stratos-Y 70 is a linear luminaire for use in panel ceilings and climate ceilings, with a prismatic lens or opal diffuser. - Lightweight construction - Easy installation in a prefabricated ceiling opening - Available in several lengths - With a microprismatic lens (UGR d 19 for office use) or opal diffuser

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 8 November 2026