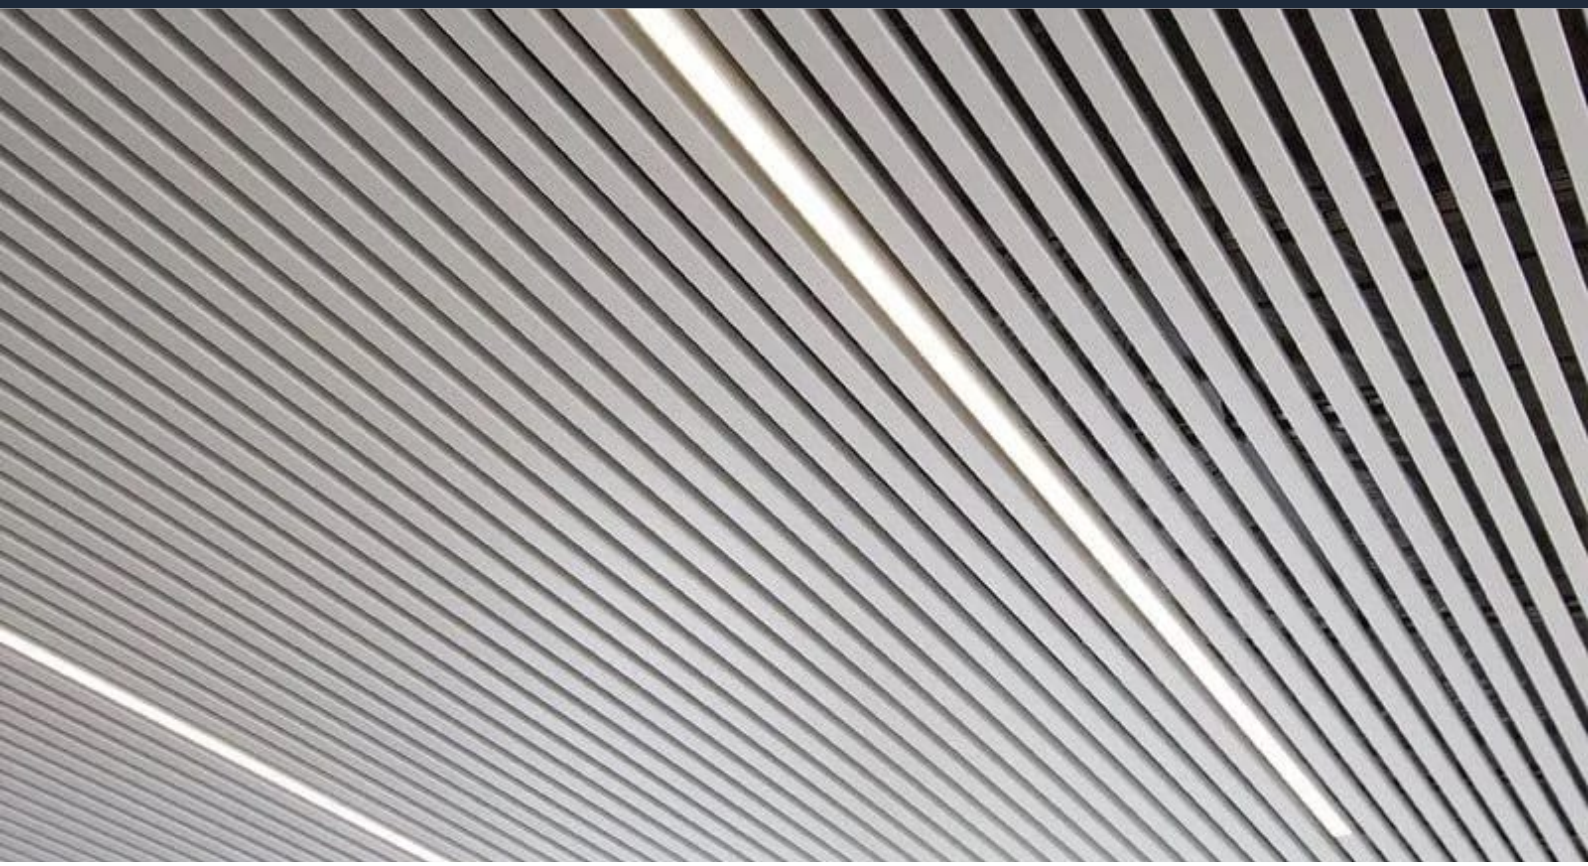


ATOMIS

Vectura SAPP prismatic

Narrow linear luminaire for integration into Interalu SAPP climate ceilings; DALI-dimmable as standard and available in multiple lengths.

CATEGORY	MOUNTING	IP CLASS
Climate ceiling luminaires, Baffle luminaires	**Inleg**	**IP20 (boven) / IP20 (onder)**

COLOUR TEMPERATURE	CRI	UGR
3000K, 4000K	**CRI80, CRI90**	**<19**

Introduction

Narrow linear luminaire for integration into Interalu SAPP climate ceilings; DALI-dimmable as standard and available in multiple lengths.

With the Vectura-SAPP prismatic, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.


Technical specifications

Mounting	**Inleg**
Application	**Kantoren, Zorg, Education, Public spaces, Vrijetijdssector**
Dimensions	**On request**
Material	**(gerecycled) Aluminium (behuizing)**
Optics	**Microprisma**
UGR	**<19**
IP class	**IP20 (boven) / IP20 (onder)**
CRI	**CRI80, CRI90**
CCT	**3000K, 4000K**
Control	**aan/uit, DALI-2, 1-10v, Casambi, On request**
Emergency lighting	**1-hour emergency power, 1 uur autonomie autotest**
Service life	**L90@50.000 uur**
Voltage / freq.	**220-240V, 50 / 60Hz**
Efficiency	**>140lm/W**
Photobiological safety	**IEC 62471: RG1 (low risk)**
Insulation class	**Class II**
Power factor	**>0.9**
Ambient temperature	**-20°C / +40°C**
Colour	**RAL9016, RAL9005, On request**
Options	**Eenvoudige integratie zonder aanpassingen aan plafond of onderliggende structuur. Leverbaar van 1000 mm tot 4500 mm en toepasbaar in lineaire of speelse plafondpatronen.**
Brand	**Atomis**
Category	**Climate ceiling luminaires, Baffle luminaires**

Product photos

Atmosphere and product images



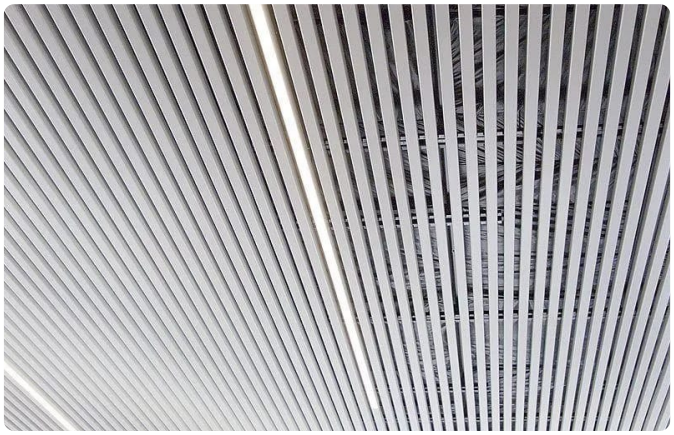

Specification text

Vectura-SAPP prismatic is a climate ceiling and baffle luminaire from the Vectura range by Atomis. The luminaire is lay-in, directed downward and fitted with a microprismatic optic. The range is intended for offices, healthcare, education, public spaces and leisure venues.

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information held in the Atomis luminaire database. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 28 November 2026