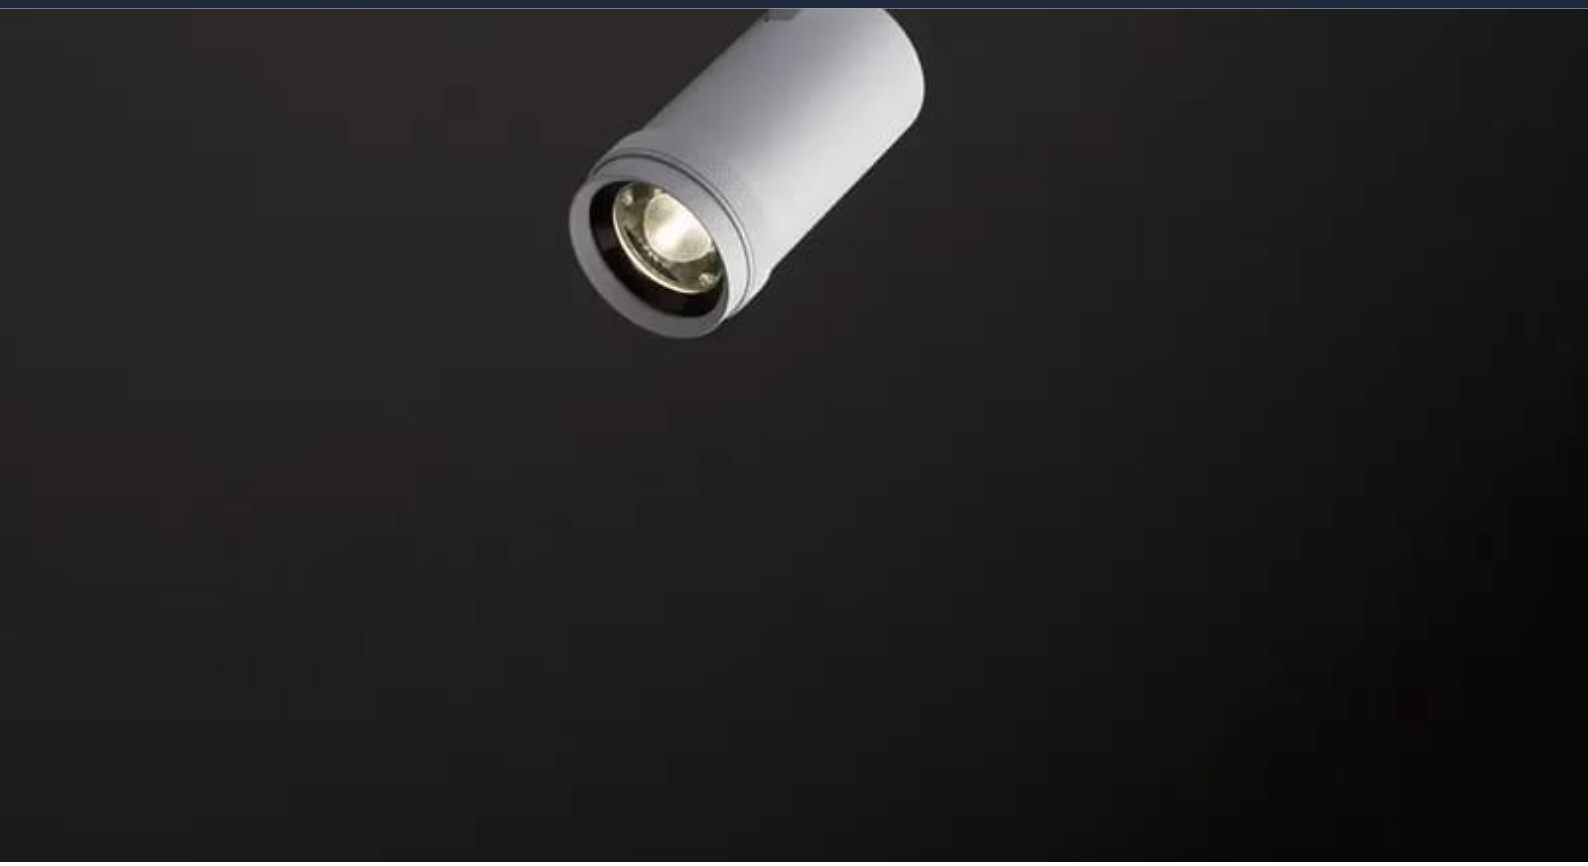


ATOMIS

# Zumo 60 Vario white

Zumo 60 Vario is a zoomable LED spot for standard 3-phase track. The spot features a powerful LED with a high colour rendering index (CRI > 97). The beam can b…

CATEGORY
**Track luminaires**

MOUNTING
**Track**

IP CLASS
**IP20 (boven) / IP20 (onder)**

COLOUR TEMPERATURE
**3000K, 4000K, Tunable white**

CRI
**CRI90, CRI97**

## Introduction

Zumo 60 Vario is a zoomable LED spot for standard 3-phase track. The spot features a powerful LED with a high colour rendering index (CRI > 97). The beam can b…

With the Zumo 60 Vario White, you choose architectural lighting that unites design and light quality. Designed for kantoren, musea, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

## Features

- Compact design LED spot (ø60 mm) for standard track
- High CRI (> 97) colour rendering index
- Continuously adjustable beam from 10° spot to 50° wide flood
- Flicker-free dimming (in accordance with IEEE 1789) at the spot
- Particularly suitable for lighting galleries, museums and exhibition spaces

# Technical specifications

| | |
|---|---|
| Mounting | **Track** |
| Application | **Kantoren, Musea, Public spaces, Vrijetijdssector** |
| Dimensions | **55x140mm** |
| Material | **Aluminium (behuizing)** |
| Optics | **Zoom lens** |
| IP class | **IP20 (boven) / IP20 (onder)** |
| CRI | **CRI90, CRI97** |
| CCT | **3000K, 4000K, Tunable white** |
| Control | **aan/uit, DALI-2, 1-10v, Casambi, On request** |
| Service life | **L90@100.000 uur** |
| Voltage / freq. | **220-240V, 50 / 60Hz** |
| Photobiological safety | **IEC 62471: RG1 (low risk)** |
| Insulation class | **Class II** |
| Power factor | **>0.9** |
| Ambient temperature | **-20°C / +40°C** |
| Colour | **RAL9016** |
| Brand | **Atomis** |
| Category | **Track luminaires** |

# Product photos

Atmosphere and product images



## Specification text

Zumo 60 Vario is a zoomable LED spot for standard 3-phase track. The spot features a powerful LED with a high colour rendering index (CRI > 97). The beam can be continuously adjusted from a 10° spot to a 50° wide flood simply by turning the zoom lens. Zumo 60 Vario spots are particularly suitable for lighting galleries, museums and art exhibitions. - Compact design LED spot (ø60 mm) for standard track - High CRI (> 97) colour rendering index - Continuously adjustable beam from 10° spot to 50° wide flood - Flicker-free dimming (in accordance with IEEE 1789) at the spot - Particularly suitable for lighting galleries, museums and exhibition spaces

# Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 7 November 2026