



ATOMIS

Zumo 90 Vario black

Zumo 90 Vario is a zoomable LED spot for standard 3-phase track. The spot features a powerful LED with a high colour rendering index (CRI > 97). The beam can b...

CATEGORY

Track luminaires

MOUNTING

Track

IP CLASS

IP20 (boven) / IP20 (onder)

COLOUR TEMPERATURE

3000K, 4000K, Tunable white

CRI

CRI90, CRI97

Introduction

Zumo 90 Vario is a zoomable LED spot for standard 3-phase track. The spot features a powerful LED with a high colour rendering index (CRI > 97). The beam can b...

With the Zumo 90 Vario Black, you choose architectural lighting that unites design and light quality. Designed for kantoren, musea, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Features

- Can be used on standard high-voltage track
- High CRI (> 97) colour rendering index
- Continuously adjustable beam from 12° spot to 55° wide flood
- Flicker-free dimming (in accordance with IEEE 1789) at the spot
- Particularly suitable for lighting galleries, museums and exhibition spaces



Technical specifications

Mounting	Track
Application	Kantoren, Musea, Public spaces, Vrijetijdssector
Dimensions	90x192mm
Material	Aluminium (behuizing)
Optics	Zoom lens
IP class	IP20 (boven) / IP20 (onder)
CRI	CRI90, CRI97
CCT	3000K, 4000K, Tunable white
Control	aan/uit, DALI-2, 1-10v, Casambi, On request
Voltage / freq.	220-240V, 50 / 60Hz
Photobiological safety	IEC 62471: RG1 (low risk)
Insulation class	Class II
Power factor	>0.9
Ambient temperature	-20°C / +40°C
Colour	RAL9005
Brand	Atomis
Category	Track luminaires

Product photos

Atmosphere and product images



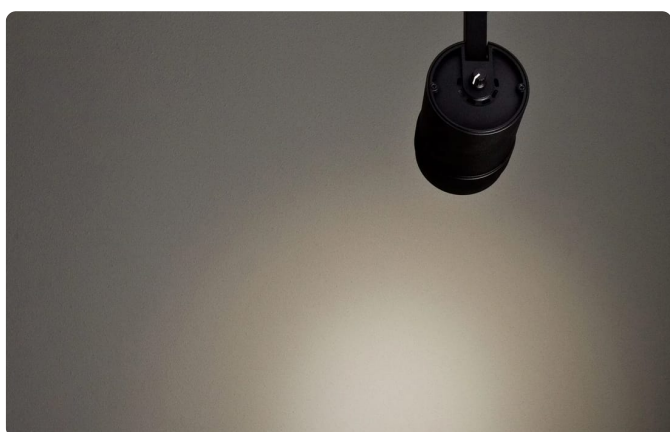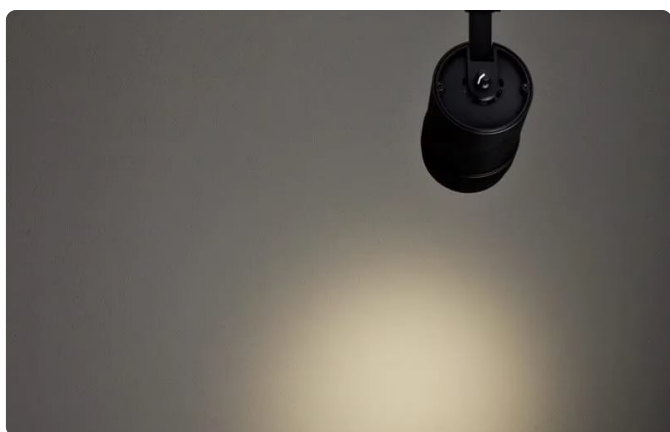

Specification text

Zumo 90 Vario is a zoomable LED spot for standard 3-phase track. The spot features a powerful LED with a high colour rendering index (CRI > 97). The beam can be continuously adjusted from a 12° spot to a 55° wide flood simply by turning the zoom lens. Zumo 90 Vario spots are particularly suitable for lighting galleries, museums and art exhibitions. - Can be used on standard high-voltage track - High CRI (> 97) colour rendering index - Continuously adjustable beam from 12° spot to 55° wide flood - Flicker-free dimming (in accordance with IEEE 1789) at the spot - Particularly suitable for lighting galleries, museums and exhibition spaces

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 12 September 2026