



ATOMIS

Zumo Contour spot

Zumo Contour spot is an LED spot with a contour projector, suitable for standard 3-circuit track systems. The spot features a powerful LED with a high colour r...

CATEGORY

Track luminaires

MOUNTING

Track

IP CLASS

IP20 (naar boven)/IP40 (naar beneden)

COLOUR TEMPERATURE

2700K, 3000K, 3500K, 4000K, Tunable White

CRI

CRI97

UGR

n-v-t-

Introduction

Zumo Contour spot is an LED spot with a contour projector, suitable for standard 3-circuit track systems. The spot features a powerful LED with a high colour r...

With the Zumo Contour spot, you choose architectural lighting that unites design and light quality. Designed for exhibition spaces, hospitality, office, education, public spaces, retail, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

Features

- Can be used on standard high-voltage track
- High CRI (> 97) colour rendering index
- Flicker-free dimming (in accordance with IEEE 1789) at the spot
- Particularly suitable for lighting galleries, museums and exhibition spaces

Technical specifications

| | |
|------------------------|--|
| Mounting | Track |
| Application | Exhibition spaces, Hospitality, Office, Education, Public spaces, Retail |
| Material | Acrylic, Aluminium |
| Optics | Zoom lens |
| UGR | n-v-t- |
| IP class | IP20 (naar boven)/IP40 (naar beneden) |
| CRI | CRI97 |
| CCT | 2700K, 3000K, 3500K, 4000K, Tunable White |
| Control | 1-10V dimmable, Casambi dimmable, DALI dimmable, Optional |
| Emergency lighting | N/A |
| Efficiency | >35lm/W |
| Photobiological safety | IEC 62471: RG1 (low risk) |
| Insulation class | Class I |
| Power factor | >0.9 |
| Ambient temperature | -20°C / +40°C |
| Options | 220-240V, 50 / 60Hz, 93 100 100 100 100, Phase track, Integrated, L90B50@60, 000h (Tq 25°C), N/A, On request, Adjustable, Round, SDCM=2 |
| Brand | Atomis |
| Category | Track luminaires |


Product photos

Atmosphere and product images — technical drawings are on a separate page



Technical drawings

Dimensions and line art — not to scale

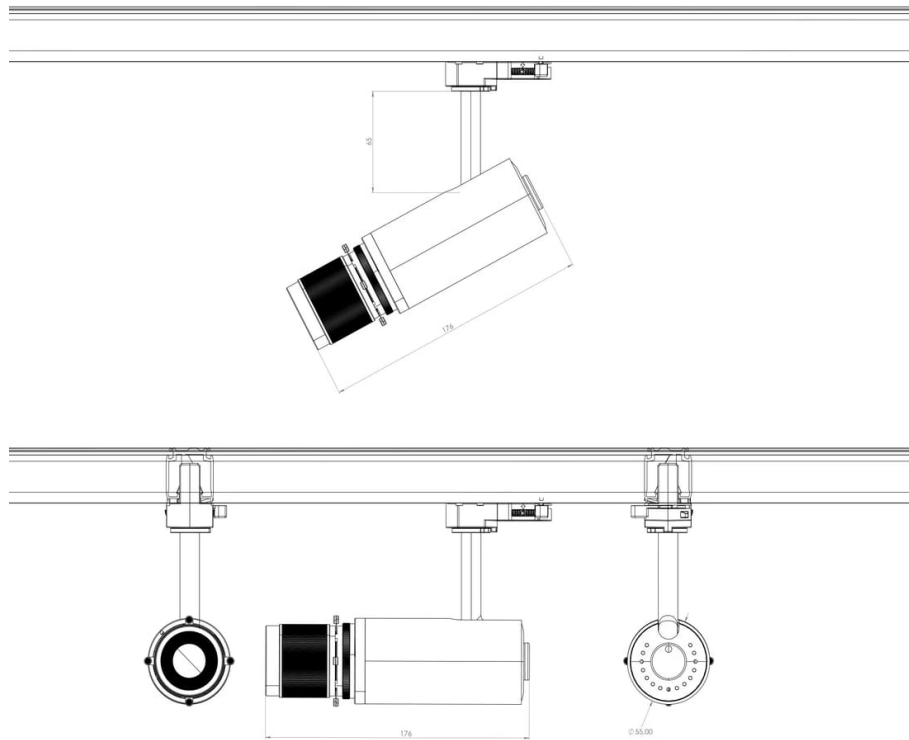

Photometric drawing

Specification text

Zumo Contour spot is an LED spot with a contour projector, suitable for standard 3-circuit track systems. The spot features a powerful LED with a high colour rendering index (CRI > 97). - Can be used on standard high-voltage track - High CRI (> 97) colour rendering index - Flicker-free dimming (in accordance with IEEE 1789) at the spot - Particularly suitable for lighting galleries, museums and exhibition spaces

Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 9 July 2026