

MITRON TRACK SPOT



Mitron track spot is an adjustable LED spot for universal mains tracks.




- Available in matt black or matt white
- Reflector 24° or 40°
- Bluetooth dimmable driver available
- DALI version available

Downloads

[Photometrics Mitron track spot](#)

Create your own custom made product, download the PDF specsheets or add to quote:

PRODUCT IMAGES

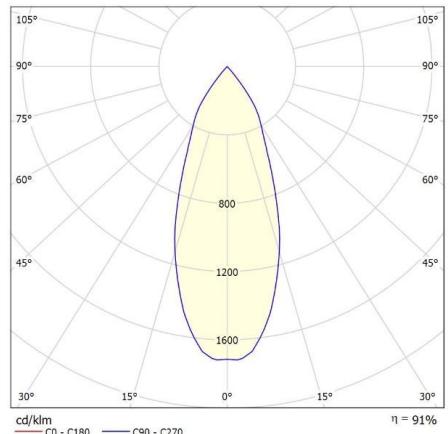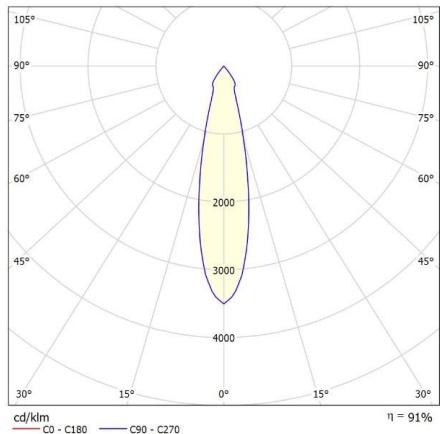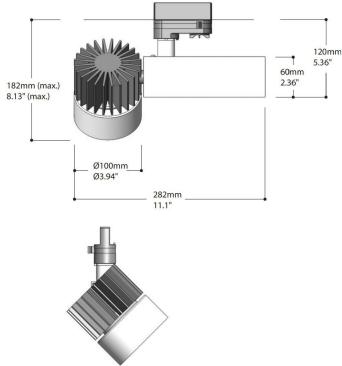



NOTES

ADDITIONAL INFORMATION

Mitron track spot	16W 2000lm 3000K CRI80, 16W 2050lm 4000K CRI80, 20W 2450lm 3000K CRI80, 20W 2500lm 4000K CRI80, 28W 3300lm 3000K CRI80, 28W 3400lm 4000K CRI80, 30W 3500lm 3000K CRI80, 30W 3500lm 3000K CRI80 (Bluetooth adapter), 30W 3600lm 4000K CRI80, 30W 3600lm 4000K CRI80 (Bluetooth adapter), Version to be determined
Optic	Reflector
Operational temperature	-20 ° C / + 40 ° C
Material	Aluminum, Extruded aluminium
IP-class	IP20 (top) / IP20 (bottom)
Packaging dimensions	300x220x140mm
Gross weight	4.5KG
Appliance class	Class-I
Power factor	>0.9
Lighting control	Optional
Colour temperature	3000K, 4000K
Colour Rendering Index (CRI)	CRI80, CRI90
Colour consistency (SDCM)	SDCM=2
Luminaire efficacy	130lm/W
Expected lifetime	L90B50@60.000h (Tq 25 ° C)
Orientation	Directable
Spot bundle (FWHM)	24°, 40°
Way of mounting	Track
Designed	Philip Feenstra, 2010
Length	282mm
Width	100mm
Voltage / frequency	220-240V, 50 / 60Hz
Application	Education, Hospitality, Municipality, Office, Residential, Retail
IK class	N/A
Number of modules	1
Driver position	Integrated
Product colour	Matt white, Matte Black
Energy label	A+

Photobiological safety

IEC 62471: RG1 (low risk)

