

## NANO 35 WHITE



Nano 35 is an adjustable & recessed spotlight with a 36° lens. This spotlight is an elegant miniature recessed spotlight that can be used both as an adjustable spotlight and as a recessed downlight.



- Miniature adjustable spotlight (ø35mm) that can also be pushed up until it is completely recessed into the ceiling
- Equipped with a 36° FWHM lens
- High color rendering index (CRI >90)
- On-off version, DALI dimmable and Casambi dimmable version available

### Downloads

[Photometrics Nano 35](#)

**Create your own custom made product, download the PDF specsheet or add to quote:**

PRODUCT IMAGES

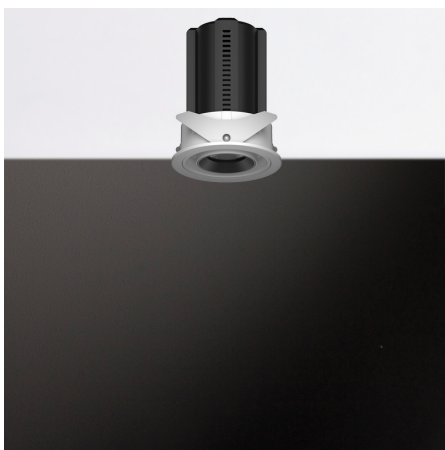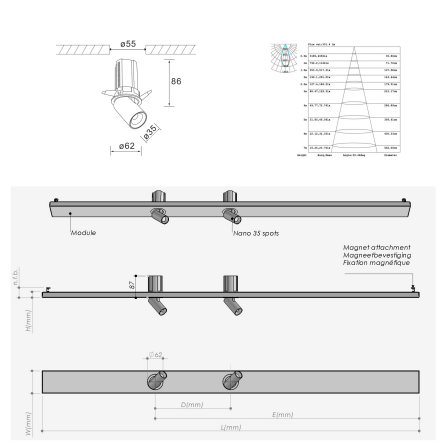

NOTES

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Appliance class</b>	Class-I
<b>Application</b>	Exposure, Office, Residential, Retail
<b>Colour consistency (SDCM)</b>	SDCM=2
<b>Colour Rendering Index (CRI)</b>	CRI90
<b>Colour temperature</b>	3000K, 3500K, 4000K
<b>Driver position</b>	Integrated
<b>Energy label</b>	A+
<b>Expected lifetime</b>	L90B50@50.000h (Tq 25°C)
<b>Gross weight</b>	0.6KG
<b>IP-class</b>	IP20 (top) / IP20 (bottom)
<b>Lighting control</b>	Dimmed Casambi, Dimmed DALI
<b>Luminaire efficacy</b>	80lm/W
<b>Material</b>	Aluminum, Plastic
<b>Number of modules</b>	1
<b>Operational temperature</b>	-20 ° C / + 40 ° C
<b>Optic</b>	Lens
<b>Orientation</b>	Directable, Down
<b>Packaging dimensions</b>	300x220x140mm
<b>Power factor</b>	>0.9
<b>Primary connection</b>	GST18i3, GST18i5 pastel blue
<b>Product colour</b>	Matte white textured coating
<b>Shape</b>	Round
<b>Spot bundle (FWHM)</b>	36°
<b>Voltage / frequency</b>	220-240V, 50 / 60Hz
<b>Way of mounting</b>	Recessed
<b>Length</b>	180mm
<b>Width</b>	ø60mm
<b>Photobiological safety</b>	IEC 62471: RG1 (low risk)
<b>ANSI/IES TM-30-18</b>	Approved

**Nano 35**

Version to be determined, 7W 500lm 3000K 36° CRI90, 7W 500lm 3500K 36° CRI90, 7W 550lm 4000K 36° CRI90, 7W 500lm 3000K 36° CRI90 DALI, 7W 500lm 3500K 36° CRI90 DALI, 7W 550lm 4000K 36° CRI90 DALI, 7W 500lm 3000K 36° CRI90 Casambi, 7W 500lm 3500K 36° CRI90 Casambi, 7W 550lm 4000K 36° CRI90 Casambi

