


VECTURA-SAPP PRISMATIC

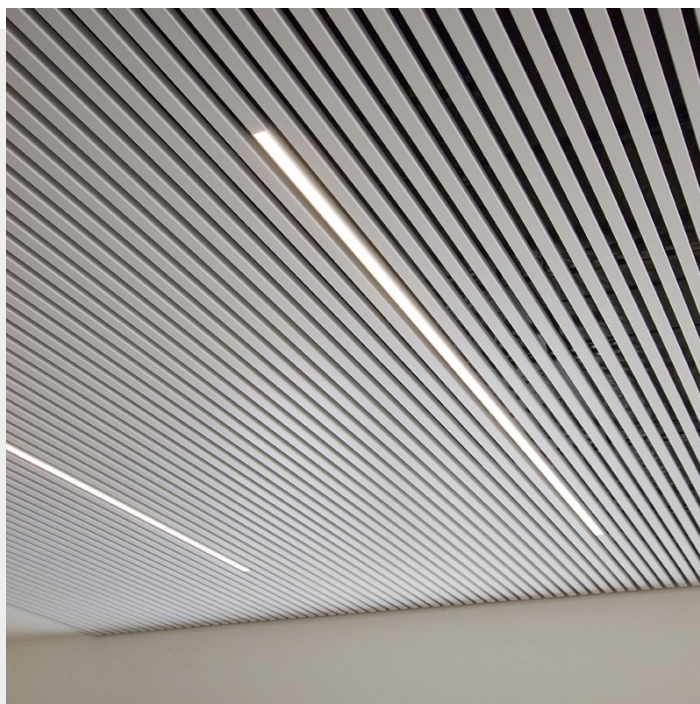

Vectura SAPP prismatic is a luminaire to be integrated in the [Interalu SAPP®ceiling](#) pattern. Due to the design of this luminaire, the luminaire is easy to integrate without any adjustments of the ceiling or its structure.




- Size of the profile corresponds to the SAPP®ceiling structure
- Totally integration with an architectural appearance
- Length 1000mm, 1500mm, 2000mm, 2500mm, 3000mm, 3500mm, 4000mm and 4500mm standard
- Micro prismatic glare control (UGR <19) versions available

Downloads

[Photometrics Vectura SAPP Prismatic](#)

Create your own custom made product, download the PDF specsheet or add to quote:

PRODUCT IMAGES

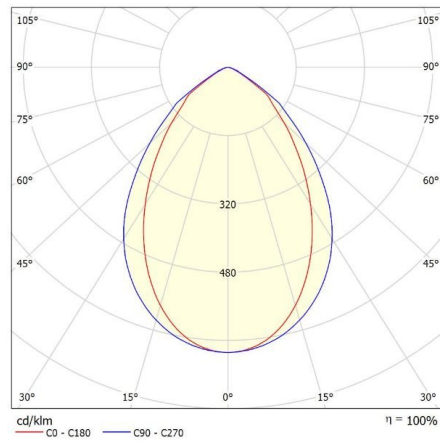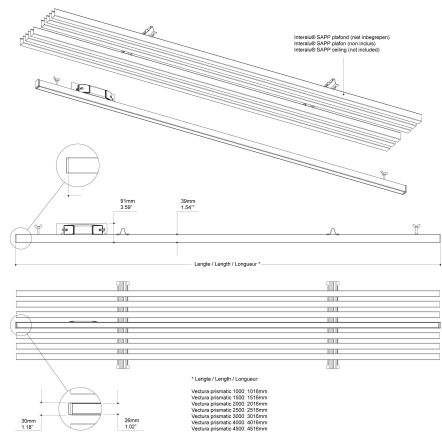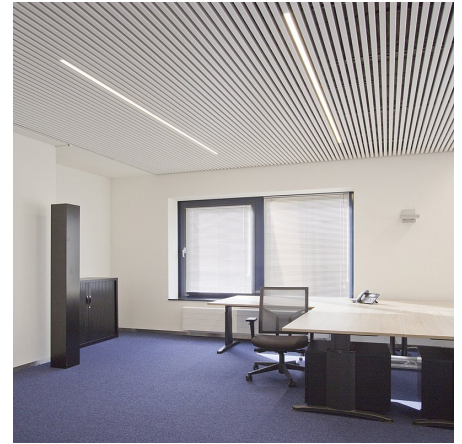


f-waardering volgens UGR													
p	Plaafond	70	70	50	50	30	30	70	70	50	50	30	
p	Muren	50	30	50	30	50	30	50	30	50	30	30	
p	Vloer	20	20	20	20	20	20	20	20	20	20	20	
	Ruimteafmeting	X	Y						Z				
			Perspectief dwars t.o.v. lampen						Perspectief langs t.o.v. lampen				
2H	2H	17,5	18,5	17,5	18,7	18,9	19,0	20,0	19,2	20,2	20,4		
	3H	17,5	18,4	17,8	18,7	18,9	19,1	20,0	19,4	20,2	20,4		
	4H	17,5	18,3	17,8	18,6	18,9	19,1	19,9	19,4	20,1	20,4		
	6H	17,5	18,2	17,8	18,5	18,8	19,0	19,8	19,3	20,0	20,3		
	8H	17,4	18,1	17,8	18,4	18,8	19,0	19,7	19,3	20,0	20,3		
	12H	17,4	18,1	17,8	18,4	18,7	18,9	19,6	19,3	19,9	20,2		
4H	2H	17,6	18,4	17,9	18,7	18,9	19,0	19,8	19,3	20,1	20,3		
	3H	17,7	18,3	18,0	18,7	19,0	19,1	19,8	19,4	20,1	20,4		
	4H	17,7	18,3	18,0	18,6	18,9	19,1	19,7	19,4	20,0	20,3		
	6H	17,6	18,1	18,0	18,5	18,9	19,0	19,5	19,4	19,9	20,3		
	8H	17,6	18,0	18,0	18,4	18,8	19,0	19,5	19,4	19,8	20,2		
	12H	17,6	18,0	18,0	18,4	18,8	19,0	19,4	19,4	19,8	20,2		
8H	2H	17,6	18,0	18,0	18,4	18,8	19,0	19,4	19,4	19,8	20,2		
	3H	17,5	17,9	18,0	18,3	18,8	18,9	19,3	19,4	19,7	20,2		
	4H	17,5	17,8	18,0	18,3	18,7	18,9	19,2	19,4	19,7	20,2		
	6H	17,5	17,7	18,0	18,3	18,7	18,9	19,1	19,4	19,7	20,1		
	8H	17,5	17,7	18,0	18,4	18,8	18,9	19,4	19,4	19,8	20,2		
	12H	17,5	17,7	18,0	18,3	18,7	18,9	19,1	19,4	19,7	20,1		
12H	2H	17,7	18,0	18,0	18,4	18,8	18,9	19,4	19,4	19,8	20,2		
	3H	17,7	18,0	18,0	18,4	18,8	18,9	19,4	19,4	19,8	20,2		
	4H	17,7	18,0	18,0	18,4	18,8	18,9	19,4	19,4	19,8	20,2		
	6H	17,5	17,8	18,0	18,3	18,7	18,9	19,2	19,4	19,7	20,1		
	8H	17,5	17,7	18,0	18,3	18,7	18,9	19,1	19,4	19,7	20,1		
	12H	17,5	17,7	18,0	18,2	18,7	18,9	19,1	19,4	19,6	20,1		



Variatie op waarnemerspositie voor lampstanden 5

S = 1,0H	+0,8 / -1,1	+0,4 / -1,0
S = 1,5H	+1,7 / -4,5	+2,1 / -4,6
S = 2,0H	+3,1 / -6,5	+3,8 / -6,6

Standaardtabel	BK01	BK01
Correctie-optelbaar	-0,3	1,2

Gecorrigeerde beeldrijndiepte in relatie tot 2482mm Totale lichtscherm

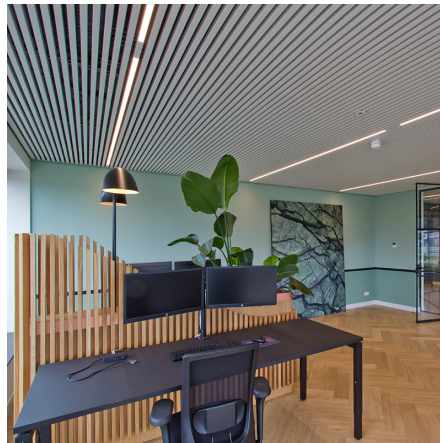

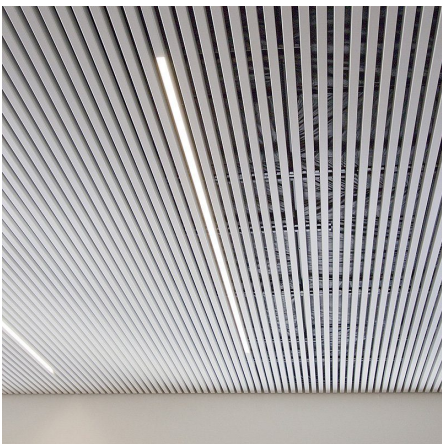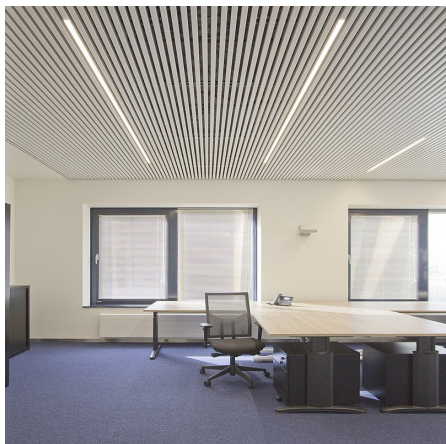

NOTES

ADDITIONAL INFORMATION

Appliance class	Class-II
Application	Education, Hospitality, Municipality, Office, Retail
CIE Flux Code	93 100 100 100 100
Colour consistancy (SDCM)	SDCM = 3
Colour Rendering Index (CRI)	CRI80, CRI90
Colour temperature	3000K, 4000K
Expected lifetime	L90B50@60.000h (Tq 25 ° C)
Designed	Philip Feenstra, 2018
Driver position	Integrated
Emergency lighting	Optional
Glare (UGR)	<19
Height	40mm
IP-class	IP40 (top)/IP40 (bottom)
Gross weight	1.2KG, 1.8KG, 3.0KG, 3.6KG, 4.3KG
Lighting control	Optional
Luminaire efficacy	114-118lm/W
Material	Aluminum, Acrylate
Operational temperature	-20 ° C / + 40 ° C
Optic	Microprismatic lens
Orientation	Down
Packaging dimensions	Bulk packaging
Power factor	>0.9
Primary connection	GST18i3, GST18i5 pastel blue
Product colour	RAL9016 matt
Voltage / frequency	220-240V, 50 / 60Hz
Way of mounting	Recessed
Width	30mm
Mounting depth	91mm
Air extraction	N/A
Number of modules	150, 225, 300, 375

Length	1016mm – 4516mm
Energy label	A++
Photobiological safety	IEC 62471: RG1 (low risk)
Vectura prismatic G8	Version to be determined, 1000 6W 800lm 3000K CRI80 G8, 1000 7W 900lm 3000K CRI80 G8, 1000 8W 1000lm 3000K CRI80 G8, 1000 9W 1100lm 3000K CRI80 G8, 1000 9W 1300lm 3000K CRI80 G8, 1000 10W 1400lm 3000K CRI80 G8, 1000 13W 1700lm 3000K CRI80 G8, 1000 15W 2000lm 3000K CRI80 G8, 1500 12W 1500lm 3000K CRI80 G8, 1500 13W 1700lm 3000K CRI80 G8, 1500 14W 1900lm 3000K CRI80 G8, 1500 15W 2100lm 3000K CRI80 G8, 1500 19W 2600lm 3000K CRI80 G8, 1500 23W 3000lm 3000K CRI80 G8, 1500 10W 1300lm 3000K CRI80 G8, 1500 10W 1150lm 3000K CRI80 G8, 2000 21W 2700lm 3000K CRI80 G8, 2000 26W 3500lm 3000K CRI80 G8, 2000 30W 4000lm 3000K CRI80 G8, 2000 13W 1700lm 3000K CRI80 G8, 2000 14W 1800lm 3000K CRI80 G8, 2000 15W 2000lm 3000K CRI80 G8, 2000 17W 2300lm 3000K CRI80 G8, 2000 19W 2500lm 3000K CRI80 G8, 2500 38W 5000lm 3000K CRI80 G8, 2500 16W 2100lm 3000K CRI80 G8, 2500 17W 2300lm 3000K CRI80 G8, 2500 19W 2600lm 3000K CRI80 G8, 2500 21W 2800lm 3000K CRI80 G8, 2500 24W 3100lm 3000K CRI80 G8, 2500 26W 3400lm 3000K CRI80 G8, 2500 32W 4300lm 3000K CRI80 G8, 3000 19W 2500lm 3000K CRI80 G8, 3000 20W 2700lm 3000K CRI80 G8, 3000 23W 3100lm 3000K CRI80 G8, 3000 26W 3400lm 3000K CRI80 G8, 3000 28W 3800lm 3000K CRI80 G8, 3000 31W 4100lm 3000K CRI80 G8, 3000 39W 5100lm 3000K CRI80 G8, 3000 36W 6000lm 3000K CRI80 G8, 3500 27W 3600lm 3000K CRI80 G8, 3500 30W 4000lm 3000K CRI80 G8, 3500 33W 4400lm 3000K CRI80 G8, 3500 36W 4800lm 3000K CRI80 G8, 3500 45W 6000lm 3000K CRI80 G8, 3500 52W 6800lm 3000K CRI80 G8, 3500 22W 3000lm 3000K CRI80 G8, 3500 24W 3200lm 3000K CRI80 G8, 4000 41W 5500lm 3000K CRI80 G8, 4000 48W 6400lm 3000K CRI80 G8, 4000 52W 6900lm 3000K CRI80 G8, 4000 26W 3600lm 3000K CRI80 G8, 4000 27W 3800lm 3000K CRI80 G8, 4000 31W 4300lm 3000K CRI80 G8, 4000 34W 4600lm 3000K CRI80 G8, 4000 38W 5000lm 3000K CRI80 G8, 4500 56W 7500lm 3000K CRI80 G8, 4500 29W 3800lm 3000K CRI80 G8, 4500 31W 4100lm 3000K CRI80 G8, 4500 35W 4600lm 3000K CRI80 G8, 4500 38W 5100lm 3000K CRI80 G8, 4500 42W 5600lm 3000K CRI80 G8, 4500 46W 6200lm 3000K CRI80 G8, 4500 52W 6900lm 3000K CRI80 G8
Specification	G8A1 / 06-02-2025

