

LINTERNA-B

A linear luminaire with a parabolic batwing louver for use in climate and metal ceilings.

- Batwing louver design enables large fixture spacings while maintaining good uniformity
- Louvers matte or gloss anodized or UGR< 19 for office use
- Bandraster mounting allows for easy installation



Downloads

[Photometrics Linterna](#)

Categories: [T-bar fixtures](#)



PRODUCT IMAGES

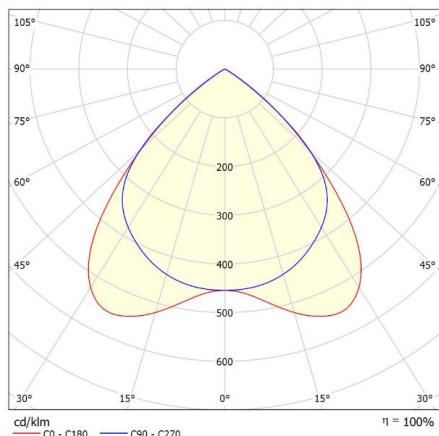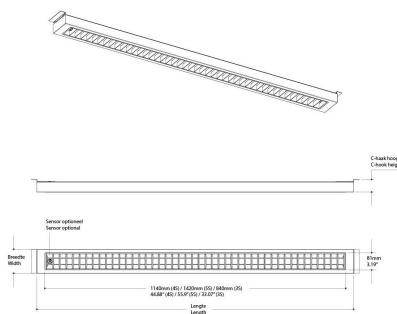

f-waardering volgens UGR										
		Perspectief divers t.o.v. lampenpas						Perspectief lens t.o.v. lampenpas		
Ruimteafmeting		X	Y	Perspectief divers t.o.v. lampenpas			Perspectief lens t.o.v. lampenpas			
μ	Plafond	70	70	50	50	30	70	70	50	50
μ	Muren	50	30	50	30	30	50	30	50	30
μ	Vloer	20	20	20	20	20	20	20	20	20
		Perspectief divers t.o.v. lampenpas						Perspectief lens t.o.v. lampenpas		
2H	2H	19.2	20.1	19.4	20.3	20.5	18.8	19.8	19.1	20.0
3H	19.0	19.9	19.3	20.1	20.4	18.7	19.5	19.2	19.8	20.0
4H	18.9	19.7	19.3	20.4	20.3	18.6	19.4	18.9	19.6	19.9
6H	18.9	18.9	19.2	19.4	20.2	18.6	19.2	18.4	19.5	19.8
8H	18.8	18.5	19.0	19.6	19.6	18.5	18.6	18.3	18.6	19.8
12H	18.8	19.5	19.2	19.8	20.1	18.4	19.1	18.8	19.4	19.7
4H	19.0	19.8	19.3	20.1	20.4	18.7	19.5	19.0	19.7	20.0
3H	18.9	19.3	19.9	20.2	20.5	18.5	19.2	18.9	19.5	19.8
4H	18.8	19.4	19.2	19.7	20.1	18.5	19.0	18.9	19.4	19.7
6H	18.7	18.9	19.1	19.6	19.6	18.4	18.7	18.3	18.7	19.6
8H	18.7	19.2	19.1	19.5	19.9	18.4	18.8	18.8	19.2	19.6
12H	18.7	19.1	19.1	19.5	19.9	18.3	18.7	18.8	19.1	19.5
8H	18.6	19.0	19.1	19.4	19.9	18.3	18.6	18.7	19.1	19.5
6H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7	19.0	19.5
12H	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	18.9	19.4
4H	18.7	19.1	19.1	19.5	19.5	18.1	18.5	18.6	19.0	19.5
6H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7	19.0	19.5
8H	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	18.9	19.4

Variatie op essentiële perspectief voor lampafstanden S

S = 1,0H	+1,7 / -4,8	+2,2 / -5,6
S = 1,5H	+3,2 / -14,9	+3,5 / -16,3
S = 2,0H	+3,2 / -19,8	+3,3 / -21,0

Standardschaal


BK00	BK00
------	------

Correctie-opteltaal

0,6	0,2
-----	-----

Gecorrigeerde weergave van de installatie in relatie tot 3718lm totale lichtstroom



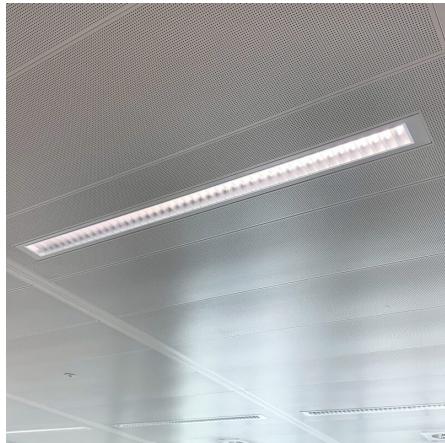

A linear luminaire with a parabolic batwing louver for use in climate and metal ceilings.

- Batwing louver design enables large fixture spacings while maintaining good uniformity
- Louvers matte or gloss anodized or UGR< 19 for office use
- Bandraster mounting allows for easy installation

Downloads

[Photometrics Linterna](#)

NOTES

ADDITIONAL INFORMATION

Driver position	Attached to the fixture, Loose driver
Lighting control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Material	Aluminum, Polycarbonate, Steel
Application	Education, Hospitality, Office, Public spaces
Oriëntatie	Down
Shape	Rectangular
Insulation Class	Class II
Color temperature	Tunable White, 2700K
Kleurconsistentie (SDCM)	SDCM=3
Ambient temperature	-20°C / +40°C
Primary connections	GST18i3, GST18i5 pastelblauw, Kabel, On the driver
Product Color	On request, RAL9010 mat, RAL9010 mat structuur, RAL9011 mat, RAL9011 mat structuur, RAL9016 mat, RAL9016 mat structuur
Product Confirmation	Recessed
Photobiological safety	IEC 62471: RG1 (low risc)
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Product family	Linterna
Width	
Color Rendering Index (CRI)	CRI80, CRI90
Expected lifespan	L90B50@60,000h (Tq 25°C)
Power factor	>0.9
Energy Rating	

