

LINTERNA-S

Linterna-S is a linear pendant luminaire with a parabolic louver.

- The parabolic batwing louver design allows for large distances between luminaires, while maintaining good uniformity.
- Matte or glossy anodized louver UGR< 19 for use in offices
- Includes a 3-meter power cord and suspension cables





Downloads

[Photometrics Linterna](#)

Categories: [Pendant luminaires](#)



PRODUCT IMAGES

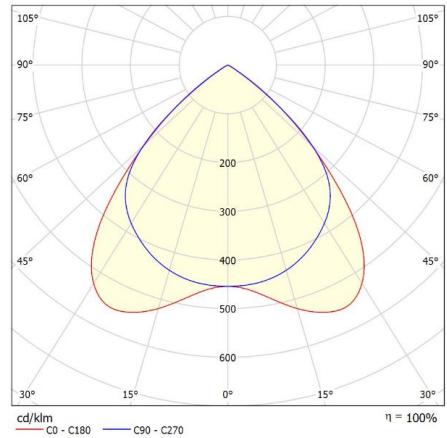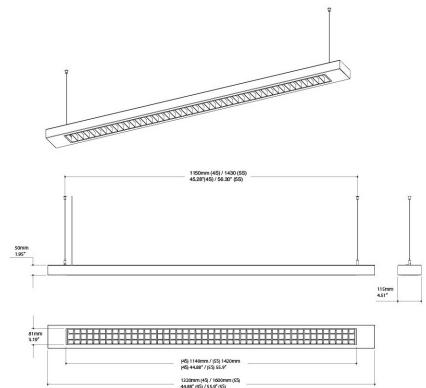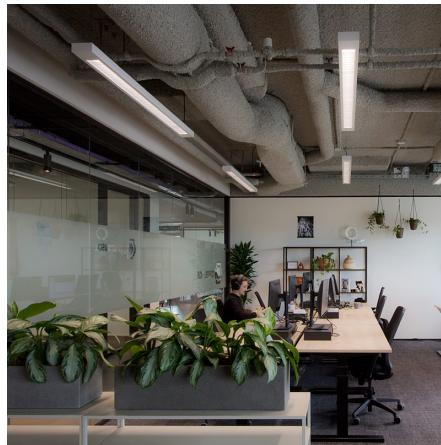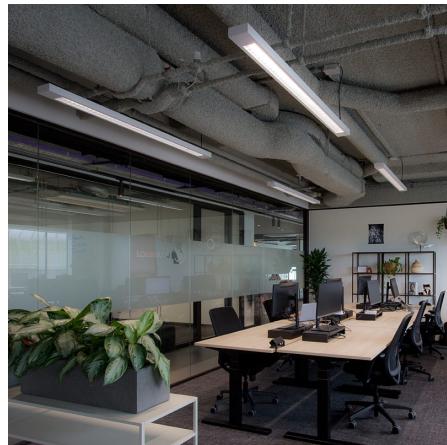

f-waardering volgens UGR									
		Perspectief dwars t.o.v. lampen					Perspectief lengs t.o.v. lampen		
Ruimteafmeting	X Y	70	70	50	50	30	70	70	50
p. Plafond		70	70	50	50	30	70	70	50
p. Muren		59	30	59	30	30	50	30	30
p. Vloer		20	20	20	20	20	20	20	20
Ruimteafmeting	X Y	Perspectief dwars t.o.v. lampen					Perspectief lengs t.o.v. lampen		
2H	2H	19.2	20.1	19.4	20.3	20.5	18.8	19.8	19.1
	3H	19.0	19.9	19.3	20.1	20.4	18.7	19.5	19.0
	4H	18.9	19.7	19.2	20.0	20.4	18.6	19.4	18.9
	5H	18.8	19.6	19.2	19.8	20.2	18.5	19.2	18.7
	8H	18.6	19.5	19.2	19.8	20.1	18.4	19.1	18.6
	12H	18.3	19.5	19.2	19.8	20.1	18.4	19.1	18.8
4H	2H	19.0	19.8	19.3	20.1	20.4	18.7	19.5	19.0
	3H	18.9	19.6	19.2	19.9	20.2	18.5	19.2	18.9
	4H	18.8	19.4	19.2	19.7	20.1	18.5	19.0	18.7
	5H	18.7	19.3	19.2	19.6	20.1	18.4	18.9	18.6
	8H	18.7	19.2	19.1	19.5	19.9	18.4	18.9	18.8
	12H	18.7	19.1	19.1	19.5	19.9	18.3	18.7	18.8
8H	2H	18.7	19.2	19.1	19.5	19.9	18.4	18.8	19.2
	3H	18.6	19.0	19.1	19.4	19.9	18.3	18.6	18.7
	4H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7
	5H	18.5	18.8	19.1	19.3	19.6	18.2	18.5	18.7
	12H	18.5	18.8	19.0	19.0	19.3	18.6	18.7	18.9
12H	4H	18.4	18.9	19.1	19.1	19.8	18.5	18.7	19.1
	6H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7
	8H	18.6	18.8	19.0	19.3	19.8	18.2	18.5	18.7
	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	19.4

Variatie op waarnemerpositie voor lampafstanden S

S = 1.0H	+1.7 / -4.8	+2.3 / -5.6
S = 2.0H	+3.2 / -14.9	+3.5 / -16.3
S = 2.0H	+5.2 / -19.8	+5.3 / -21.0

Standardtafel BK00 BK00

Correctie-optelal 0.6 0.2

Gecorrigeerde wettklaring/indicatie in relatie tot 3718lm Totale lichtstroom

Linterna-S is a linear pendant luminaire with a parabolic louver.

- The parabolic batwing louver design allows for large distances between luminaires, while maintaining good uniformity.
- Matte or glossy anodized louver UGR< 19 for use in offices
- Includes a 3-meter power cord and suspension cables

Downloads

[Photometrics Linterna](#)

NOTES

ADDITIONAL INFORMATION

Driver position	Integrated
Lighting control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Material	Aluminum, Polycarbonate, Steel
Application	Education, Hospitality, Office, Public spaces
Oriëntatie	Down
Shape	Rectangular
Insulation Class	Class II, Class-I
Photobiological safety	IEC 62471: RG1 (low risc)
Color temperature	Tunable White, 2700K
Kleurconsistentie (SDCM)	SDCM=3
Ambient temperature	-20°C / +40°C
Primary connections	GST18i3, GST18i5 pastelblauw, Kabel, On the driver
Product Color	On request, RAL9010 mat, RAL9010 mat structuur, RAL9011 mat, RAL9011 mat structuur, RAL9016 mat, RAL9016 mat structuur
Product Confirmation	Recessed
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Product family	Linterna
Color Rendering Index (CRI)	CRI80, CRI90
Expected lifespan	L90B50@60,000h (Tq 25°C)
Power factor	>0.9
Energy Rating	

