



## **Meson square 180 cardanic SAPP**

Meson square 180 cardanic SAPP is a series of LED recessed spotlights suitable for use in Interalu SAPP® ceilings. A cardanic mechanism allows easy adjustment of the spot up to 30° in all directions.

- Easy integration into Interalu SAPP® ceilings
- Can be combined with other square 180 SAPP® downlights
- Equipped with Jordan Alunova® reflector with spherical facets available in 24° or 40° beams

### **Downloads**

[Photometrics Meson square 180 SAPP cardanic](#)






**Create your own product, download the PDF specification sheet or add to the quotation:**

**Create your own product, download the PDF data sheet or add it to your quote:**

**Categories:** [Climate ceiling fixtures](#), [Baffle luminaires](#)



## PRODUCT IMAGES

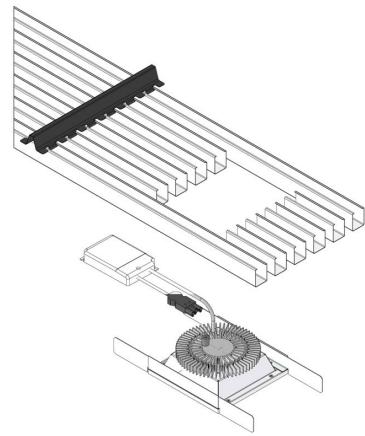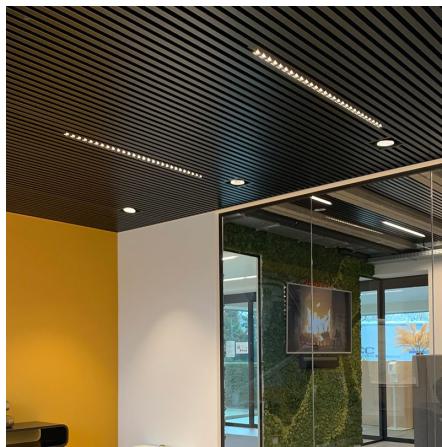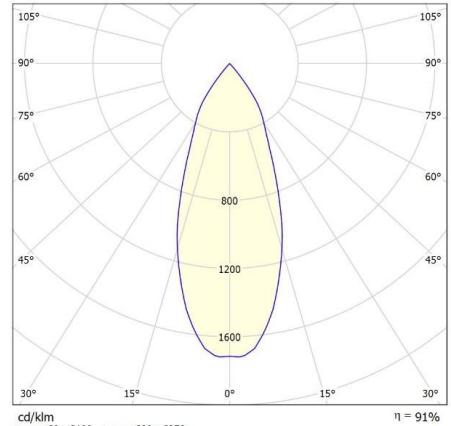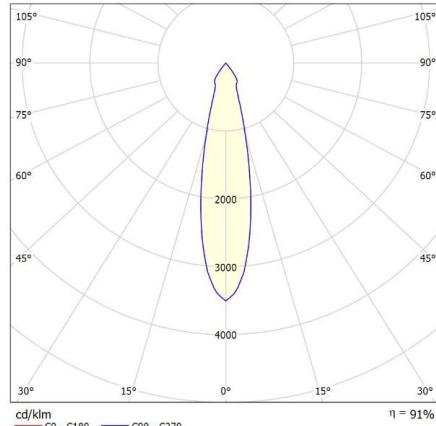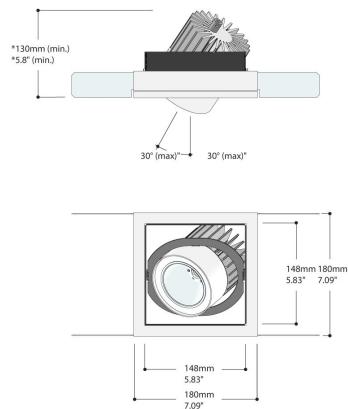

Meson square 180 cardanic SAPP is a series of LED recessed spotlights suitable for use in Interalu SAPP® ceilings. A cardanic mechanism allows easy adjustment of the spot up to 30° in all directions.

- Easy integration into Interalu SAPP® ceilings
- Can be combined with other square 180 SAPP® downlights
- Equipped with Jordan Alunova® reflector with spherical facets available in 24° or 40° beams

### Downloads

[Photometrics Meson square 180 SAPP cardanic](#)

**Create your own product, download the PDF specification sheet or add to the quotation:**

**Create your own product, download the PDF data sheet or add it to your quote:**

## **NOTES**

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Driver position</b>	Loose driver
<b>Shape</b>	Round
<b>Energy Rating</b>	
<b>Color temperature</b>	Tunable White, 2700K
<b>Kleurconsistentie (SDCM)</b>	SDCM=2
<b>Expected lifespan</b>	L90B50@70,000h (Tq 25°C)
<b>Material</b>	Acrylic, Aluminum
<b>Ambient temperature</b>	-20°C / +40°C
<b>Product Color</b>	Matte black, Matte white, On request
<b>Color Rendering Index (CRI)</b>	CRI80, CRI90
<b>Lighting control</b>	1-10V dimming, Casambi dimming, DALI dimming, Optional
<b>Primary connections</b>	GST18i3, GST18i5 pastelblauw, Kabel, On the driver
<b>Application</b>	Education, Hospitality, Office, Public spaces
<b>Oriëntatie</b>	Down
<b>Luminaire efficacy</b>	>133lm/W
<b>Product family</b>	Meson
<b>Product Confirmation</b>	Recessed
<b>Saw size</b>	180x180mm
<b>Insulation Class</b>	Class II
<b>Power factor</b>	>0.9
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)

