

METRONOME-B

Metronome-B is a linear LED luminaire equipped with 20, 28, or 36 lenses, recessed behind a grid-shaped louver for use in modular grid ceilings. This LED luminaire offers a completely new lighting solution for effective illumination with an architectural aesthetic. A choice can be made between UGR< 19 optics (standard) and UGR< 16.

- Architectural aesthetic with 20, 28, or 36 optics
- Choice between UGR< 19 and UGR< 16 optics
- Louver finish white or high-gloss aluminum
- Flat design for shallow ceiling depths

Downloads






[Photometrics Metronome-B](#)

Create your own product, download the PDF specification sheet or add to the quotation:

Categories: [T-bar fixtures](#)



PRODUCT IMAGES

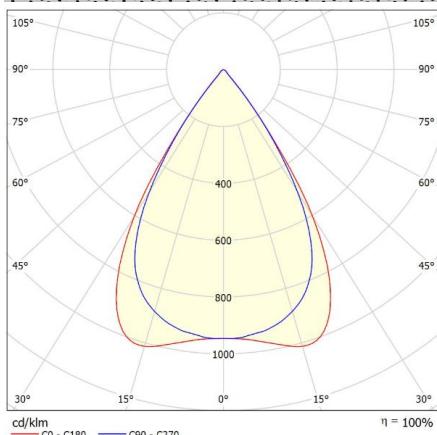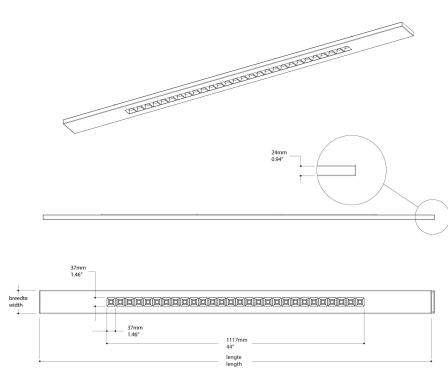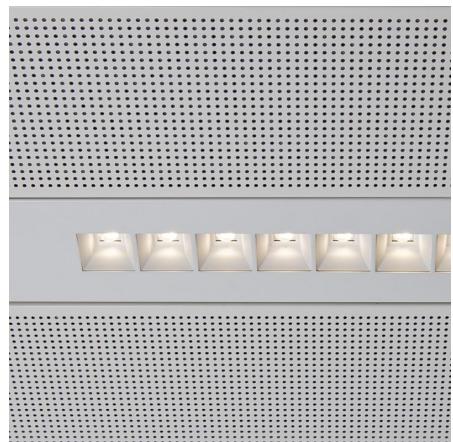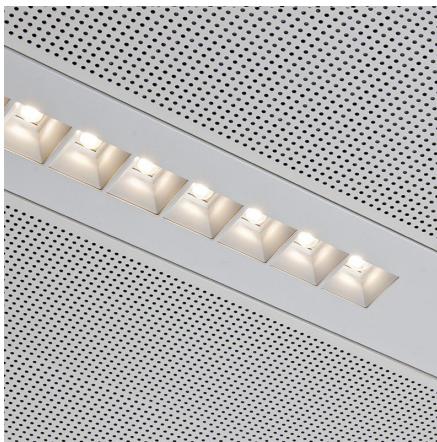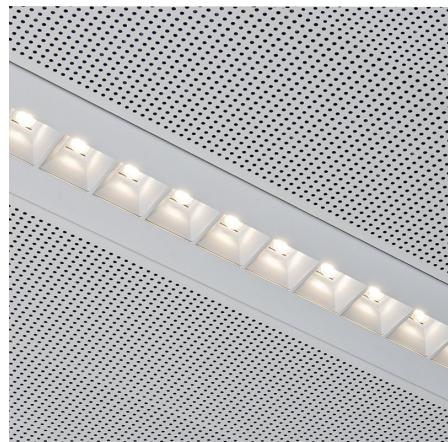

f-waardering volgens UGR										
		Perspectief dwars t.o.v. lampenass					Perspectief langs t.o.v. lampenass			
Ruimteafmeting	X	Y	2H	3H	4H	8H	12H	2H	3H	4H
μ Plafond	70	70	50	50	30	30	70	70	50	50
μ Muren	50	30	50	30	30	30	30	30	50	30
μ Vloer	20	20	20	20	20	20	20	20	20	20


Variatie op waarmepositie voor lampafstanden S:

S = 1.0H	+5.6 / -8.4	+5.2 / -7.9
S = 1.5H	+8.4 / -3.2	+7.9 / -8.8
S = 2.0H	+10.4 / -10.5	+8.9 / -9.7

Standartaatabel

BK00	BK00	
Correctie-optiek	-1.9	-2.6

Gecorrigeerde verbindingsindicatie in relatie tot 4096lm Totalle lichtstroom

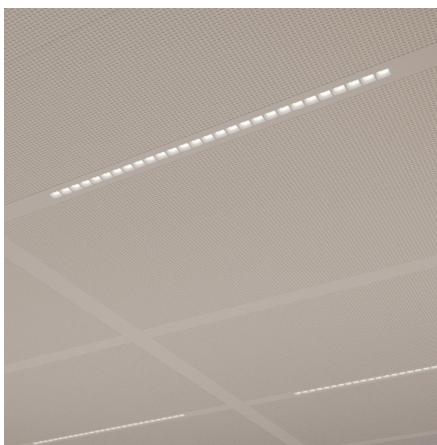

Metronome-B is a linear LED luminaire equipped with 20, 28, or 36 lenses, recessed behind a grid-shaped louver for use in modular grid ceilings. This LED luminaire offers a completely new lighting solution for effective illumination with an architectural aesthetic. A choice can be made between UGR< 19 optics (standard) and UGR< 16.

- Architectural aesthetic with 20, 28, or 36 optics
- Choice between UGR< 19 and UGR< 16 optics
- Louver finish white or high-gloss aluminum
- Flat design for shallow ceiling depths

Downloads

[Photometrics Metronome-B](#)

Create your own product, download the PDF specification sheet or add to the quotation:

NOTES

ADDITIONAL INFORMATION

Driver position	Attached to the fixture, Loose driver
Application	Education, Hospitality, Office, Public spaces
Shape	Rectangular
Energy Rating	
Product Glare (UGR)	
Color temperature	Tunable White, 2700K
Lengte	
Voltage / frequency	
Expected lifespan	L90B50@60,000h (Tq 25°C)
Primary connections	GST18i3, GST18i5 pastelblauw, Kabel, On the driver
Color Rendering Index (CRI)	CRI80, CRI90
Material	Acrylic, Aluminum, Steel
Product Color	On request, RAL9010 mat, RAL9010 mat structuur, RAL9011 mat, RAL9011 mat structuur, RAL9016 mat, RAL9016 mat structuur
Lighting control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Self-adhesive dust cover	No
Spot bundle (FWHM)	
Luminaire efficacy	>155lm/W
Air extraction	Optional
Product family	Metronome
Product Confirmation	Recessed
Optics	Lens en louver
Width	
C-Hook height	N/A
Packaging dimensions	Bulk packaging
CIE Flux code	96 99 100 100 100
Power factor	>0.9
Insulation Class	Class II
Ambient temperature	-20°C / +40°C

Kleurconsistentie (SDCM)	SDCM=3
Oriëntatie	Down
IP Rating	IP20 (upwards)/IP40 (downwards)
Photobiological safety	IEC 62471: RG1 (low risc)

