



## MYOS-M 600X600

A series of recessed luminaires with medium-power LED modules using Multioptic® lens technology, specially designed for use with exposed grid ceilings. Myos-M 600x600 Multioptic features a set of 99 medium-power LEDs behind a decorative diaphragm mask. Each LED is equipped with an individual secondary lens for excellent light distribution. The housing is made of steel, powder-coated RAL9016 or RAL9010 with a textured finish.

- Can be seamlessly integrated into exposed grid ceilings
- Architectural design
- Equipped with 99 lenses (UGR< 16-19)


### Downloads

[Photometrics Myos-M 600x600 Multioptic](#)

**Categories:** [Recessed and lay-in luminaires](#)



## PRODUCT IMAGES

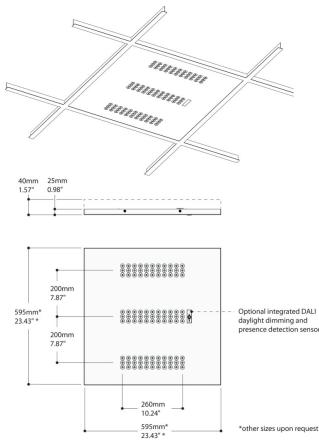

A series of recessed luminaires with medium-power LED modules using Multioptic® lens technology, specially designed for use with exposed grid ceilings. Myos-M 600x600 Multioptic features a set of 99 medium-power LEDs behind a decorative diaphragm mask. Each LED is equipped with an individual secondary lens for excellent light distribution. The housing is made of steel, powder-coated RAL9016 or RAL9010 with a textured finish.

- Can be seamlessly integrated into exposed grid ceilings
- Architectural design
- Equipped with 99 lenses (UGR< 16-19)

### Downloads

[Photometrics Myos-M 600x600 Multioptic](#)

## NOTES

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Driver position</b>	Attached to the fixture, Loose driver
<b>Ambient temperature</b>	-20°C / +40°C
<b>Product Color</b>	On request, RAL9010 mat, RAL9010 mat structuur, RAL9011 mat, RAL9011 mat structuur, RAL9016 mat, RAL9016 mat structuur
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Color Rendering Index (CRI)</b>	CRI80
<b>Lighting control</b>	1-10V dimming, Casambi dimming, DALI dimming, Optional
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Primary connections</b>	GST18i3, GST18i5 pastelblauw, Kabel, On the driver
<b>Application</b>	Education, Hospitality, Office, Public spaces
<b>Shape</b>	Square
<b>Self-adhesive dust cover</b>	No
<b>Luminaire efficacy</b>	>155lm/W
<b>Air extraction</b>	Optional
<b>Expected lifespan</b>	L90B50@60,000h (Tq 25°C)
<b>Energy Rating</b>	A+
<b>Product family</b>	Myos
<b>Product Confirmation</b>	Ceiling mounting
<b>Power factor</b>	>0.9
<b>Width</b>	595mm
<b>CIE Flux code</b>	76 96 99 99 100
<b>Material</b>	Acrylic, Steel
<b>Packaging dimensions</b>	Bulk packaging
<b>IP Rating</b>	IP20 (upwards)/IP40 (downwards)
<b>Insulation Class</b>	Class II
<b>Optics</b>	Multioptic® lenstechnologie
<b>Oriëntatie</b>	Down
<b>Kleurconsistentie (SDCM)</b>	SDCM=3

