



NANO 35 WHITE

Nano 35 is a directional & recessed spotlight with a 36° lens. This spotlight is an elegant miniature recessed spot that can be used both as a directional spot and recessed spotlight.

- Miniature adjustable spotlight (ø35mm) that can also be pushed up until it sits completely recessed in the ceiling
- Equipped with a 36° FWHM lens
- High color rendering index (CRI>90)>
- On-off version, DALI dimmable and Casambi dimmable versions available


Downloads

[Photometrics Nano 35](#)

Categories: [Downlights and recessed spotlights](#)



PRODUCT IMAGES

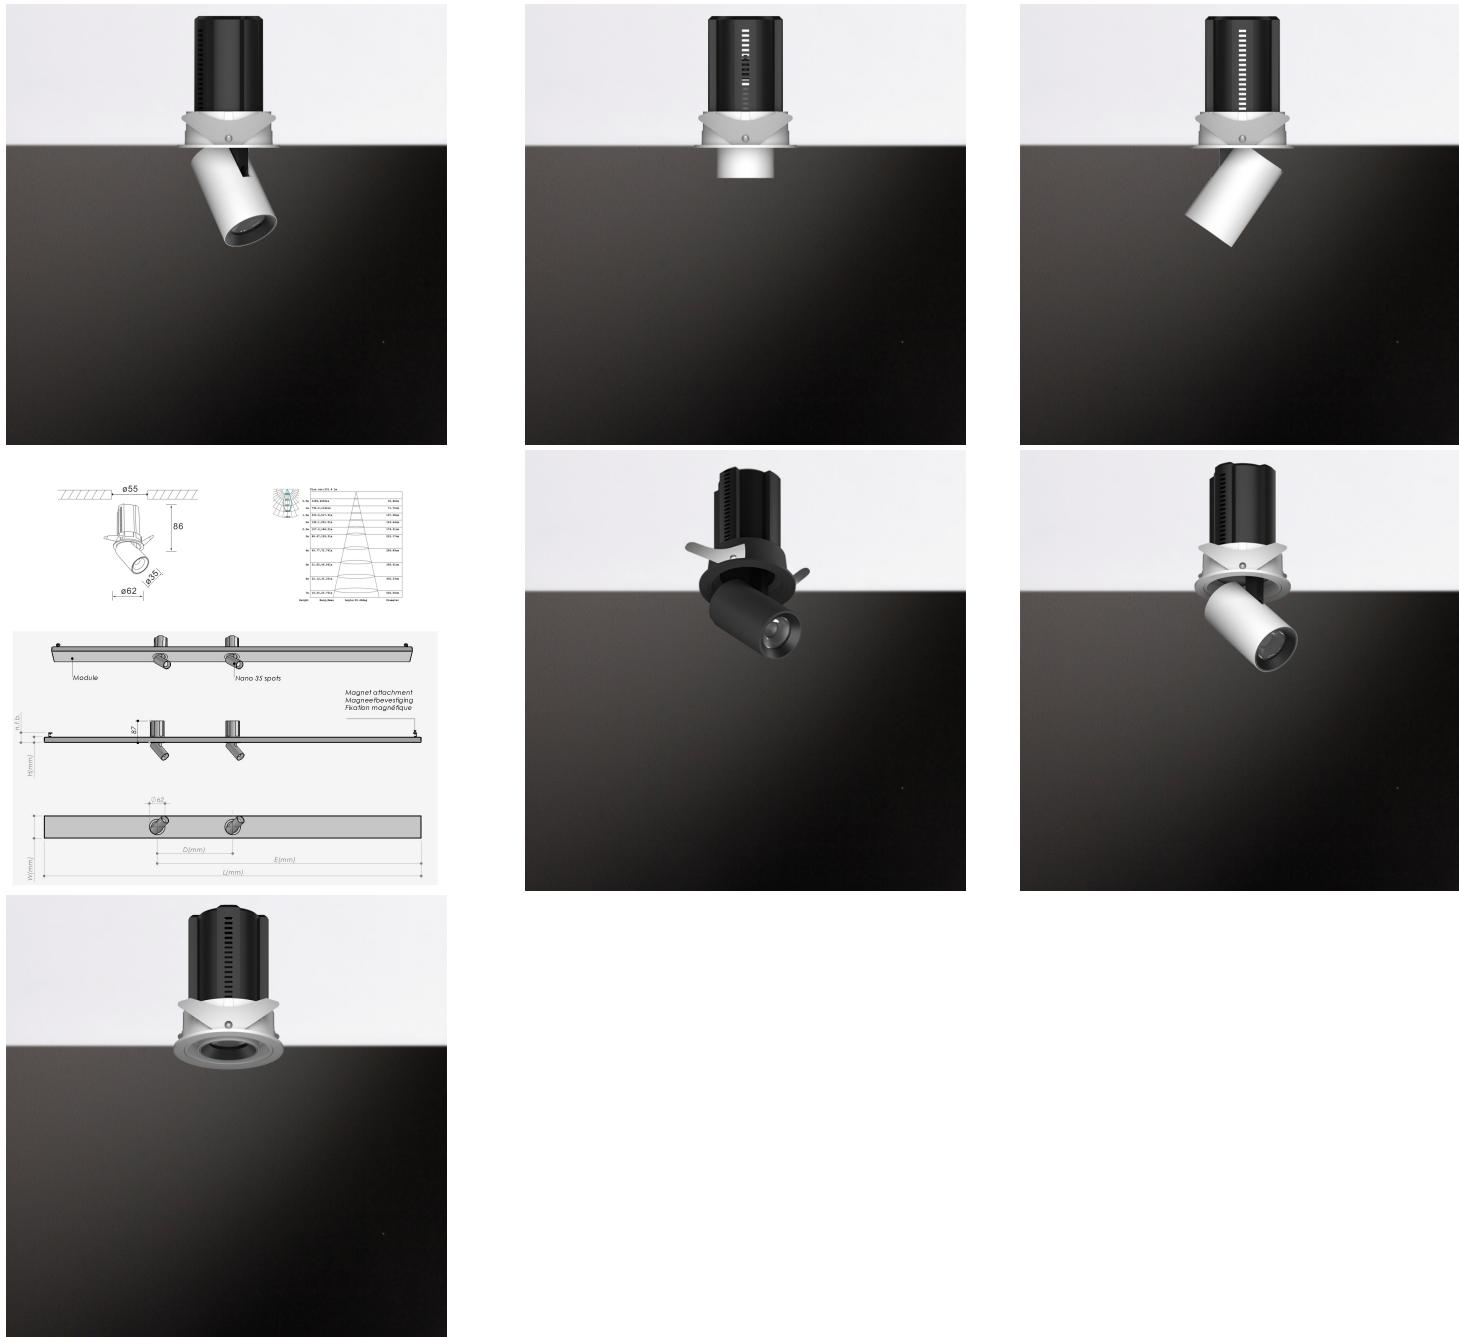

Nano 35 is a directional & recessed spotlight with a 36° lens. This spotlight is an elegant miniature recessed spot that can be used both as a directional spot and recessed spotlight.

- Miniature adjustable spotlight (ø35mm) that can also be pushed up until it sits completely recessed in the ceiling
- Equipped with a 36° FWHM lens
- High color rendering index (CRI>90)>
- On-off version, DALI dimmable and Casambi dimmable versions available

Downloads

[Photometrics Nano 35](#)

NOTES

ADDITIONAL INFORMATION

Insulation Class	Class-I
Application	Education, Hospitality, Office, Public spaces
Energy Rating	
Color temperature	2700K
Kleurconsistentie (SDCM)	SDCM=2
Primary connections	GST18i3, GST18i5 pastelblauw, Kabel, On the driver
Color Rendering Index (CRI)	CRI80, CRI90, CRI97
Material	Aluminum, Plastic
Packaging dimensions	Bulk packaging
Product Glare (UGR)	Not applicable
Lighting control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Product Color	On request, RAL9010 mat, RAL9010 mat structuur, RAL9011 mat, RAL9011 mat structuur, RAL9016 mat, RAL9016 mat structuur
Self-adhesive dust cover	No
Luminaire efficacy	>70lm/W
Air extraction	N/A
Driver position	Loose driver
Product family	Nano
Expected lifespan	L90B50@50.000h (Tq 25°C)
Ambient temperature	-20°C / +40°C
Optics	Lens
Oriëntatie	Down
Power factor	>0.9
Shape	Round
Spot bundle (FWHM)	36°
Product Confirmation	Recessed
Photobiological safety	IEC 62471: RG1 (low risc)
ANSI/IES TM-30-18	Erkend

