



## **EVOLLO-S BLACK**

Evollo-S black, an elegantly slim LED pendant luminaire featuring a row of mid-power LEDs, each with an individual lens and louver. The luminaire creates a low-glare light distribution, making it suitable for office environments. It is constructed from steel and finished with a decorative matte black textured powder coating.

- Elegant 36 mm wide slim design
- Excellent low-glare task lighting according to EN-12.464/1 for office use
- Available in a decorative matte black textured coating


### **Downloads**

[Photometrics Evolo-S](#)

**Categories:** [Pendant luminaires](#)



## PRODUCT IMAGES

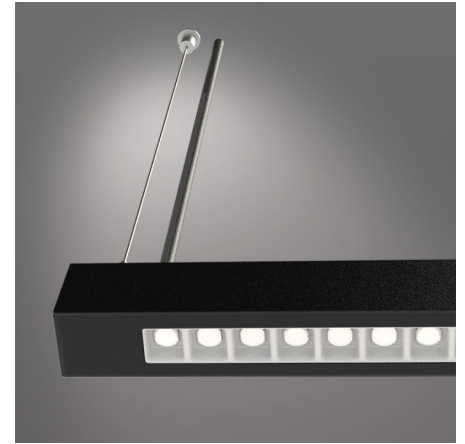

Evolo-S black, an elegantly slim LED pendant luminaire featuring a row of mid-power LEDs, each with an individual lens and louver. The luminaire creates a low-glare light distribution, making it suitable for office environments. It is constructed from steel and finished with a decorative matte black textured powder coating.

- Elegant 36 mm wide slim design
- Excellent low-glare task lighting according to EN-12.464/1 for office use
- Available in a decorative matte black textured coating

### Downloads

[Photometrics Evolo-S](#)

## NOTES

---

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Air extraction</b>	N/A
<b>Armaturefficiëntie</b>	>140lm/W
<b>Bevestiging</b>	Recessed
<b>CIE Flux code</b>	93 100 100 100 100
<b>Driver positie</b>	Loose driver
<b>Energielabel</b>	A++
<b>Family</b>	Evolo
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Glare (UGR)</b>	<19
<b>IP-class</b>	IP20 (upwards)/IP40 (downwards)
<b>Isolatieklasse</b>	Class II
<b>Kleurconsistentie (SDCM)</b>	SDCM=3
<b>Kleurtemperatuur</b>	Tunable White, 2700K, 3000K, 3500K, 4000K
<b>Color Rendering Index (CRI)</b>	CRI90, CRI80
<b>Light control</b>	1-10V dimming, Casambi dimming, DALI dimming, Optional
<b>Luchtafzuiging</b>	n.v.t.
<b>Material</b>	Steel
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Ambient temperature</b>	-20°C / +40°C
<b>Optics</b>	Lens en louver
<b>Oriëntatie</b>	Down
<b>Packaging dimensions</b>	Bulk packaging
<b>Powerfactor</b>	>9
<b>Primaire aansluitingen</b>	On request, Kabel, On the driver
<b>Productkleur</b>	On request
<b>Producttoepassing</b>	Education, Hospitality, Office, Public spaces
<b>Self-adhesive dust cover</b>	Optional
<b>Verpakkingsafmetingen</b>	Bulkverpakking
<b>Verwachte levensduur</b>	L90B50@60,000h (Tq 25°C)
<b>Voltage / frequentie</b>	220-240V, 50 / 60Hz

**Shape**

Rectangular

**Zelfklevende stofkap**

Optioneel

