



## EVOLO-S WHITE

Evololo-S white is an elegant slim LED pendant fixture equipped with a row of mid-power LEDs, each with an individual lens and louver. The fixture creates a light distribution with low glare, making it suitable for office environments. The fixture is made of steel and finished with a decorative textured powder coating in matte white.

- Elegant 36 mm wide slim design
- Excellent low-glare task lighting according to EN-12.464/1 for office use
- Available in matte white or matte black textured coating




### Downloads

[Photometrics Evolo-S](#)

**Categories:** [Pendant luminaires](#)



## PRODUCT IMAGES

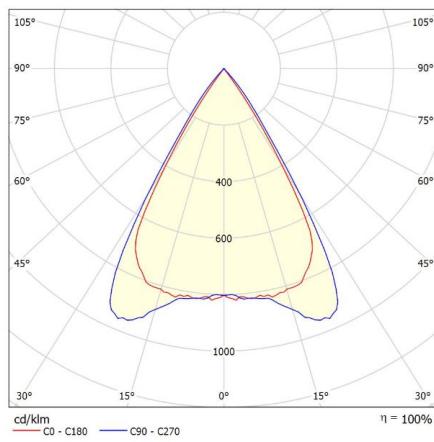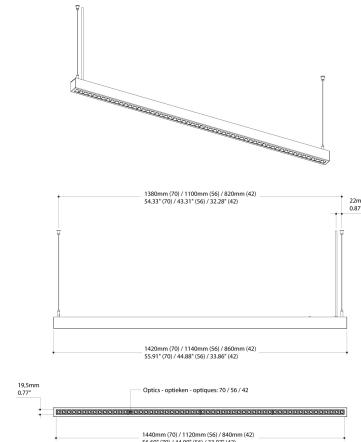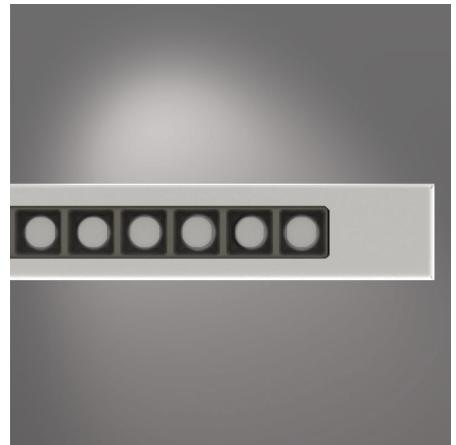

f-waardering volgens UGR											
		Perspectief dwars t.o.v. lampenpas						Perspectief langs t.o.v. lampenpas			
Ruimteafmeting	X	Y	70	70	50	50	30	70	70	50	50
p Plafond	70	70	50	50	30	30	50	50	50	50	30
p Muur	50	30	50	30	30	30	50	30	50	30	30
p Vloer	20	20	20	20	20	20	20	20	20	20	20
Ruimteafmeting	X	Y	70	70	50	50	30	70	70	50	50
2H	2H	15.5	16.1	15.7	16.3	16.5	17.1	17.8	17.4	18.0	18.2
3H	15.4	15.9	15.6	16.2	16.4	17.0	17.6	17.3	17.8	18.0	18.2
4H	15.3	15.8	15.6	16.1	16.3	16.9	17.5	17.2	17.7	18.0	18.2
6H	15.2	15.7	15.5	16.0	16.3	16.9	17.4	17.2	17.6	17.9	18.0
8H	15.2	15.6	15.3	16.2	16.5	17.3	17.9	17.6	17.9	17.9	18.0
12H	15.1	15.6	15.5	15.9	16.2	16.8	17.2	17.1	17.5	17.8	17.8
2H	15.5	16.1	16.3	16.9	17.5	17.2	17.7	17.7	17.7	18.0	18.0
3H	15.1	15.6	15.9	16.2	16.8	17.2	17.1	17.5	17.5	17.8	17.8
4H	15.1	15.4	15.8	16.1	16.7	17.1	17.1	17.4	17.4	17.8	17.8
6H	15.0	15.3	15.4	15.7	16.0	16.7	17.0	17.0	17.3	17.3	17.7
8H	14.9	15.2	15.4	16.0	16.6	16.9	17.0	17.0	17.0	17.7	17.7
12H	14.9	15.1	15.3	15.5	16.0	16.6	16.8	17.0	17.2	17.6	17.6
4H	14.9	15.2	15.4	15.6	16.0	16.6	16.9	17.0	17.3	17.7	17.7
6H	14.9	15.1	15.3	15.5	15.9	16.5	16.7	17.0	17.1	17.6	17.6
8H	14.8	15.0	15.3	15.4	15.9	16.5	16.6	16.9	17.1	17.5	17.5
12H	14.8	14.9	15.2	15.4	15.9	16.4	16.5	16.9	17.0	17.5	17.5
4H	14.9	15.1	15.3	15.5	16.0	16.6	16.8	17.0	17.2	17.6	17.6
6H	14.8	15.0	15.3	15.4	15.9	16.5	16.6	16.9	17.1	17.5	17.5
8H	14.8	14.9	15.2	15.4	15.9	16.4	16.5	16.9	17.0	17.5	17.5
12H	14.8	14.9	15.2	15.4	15.9	16.4	16.5	16.9	17.0	17.5	17.5

Variatie op waarmeterperiode voor lampafstanden S

S = 1.0H	+5.7 / +22.8	+5.2 / +23.3
S = 1.5H	+8.3 / +23.3	+7.9 / +23.7
S = 2.0H	+10.3 / +23.8	+9.8 / +24.1

Standardtafel

BK00	BK00
------	------

Correctie-opticaal

-3.2	-1.6
------	------

Gecorrigeerde verbindingssnelheid in relatie tot 2121lm Totaal lichtstroom



Evolo-S white is an elegant slim LED pendant fixture equipped with a row of mid-power LEDs, each with an individual lens and louver. The fixture creates a light distribution with low glare<, making it suitable for office environments. The fixture is made of steel and finished with a decorative textured powder coating in matte white.

- Elegant 36 mm wide slim design
- Excellent low-glare task lighting according to EN-12.464/1 for office use
- Available in matte white or matte black textured coating

**Downloads**

[Photometrics Evolo-S](#)

## **NOTES**

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Driver positie</b>	Integrated
<b>Light control</b>	1-10V dimming, Casambi dimming, DALI dimming
<b>Material</b>	Steel
<b>Producttoepassing</b>	Education, Hospitality, Office, Public spaces
<b>Oriëntatie</b>	Down
<b>Shape</b>	Rectangular
<b>Isolatieklasse</b>	Class II
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Primaire aansluitingen</b>	GST18i5 pastelblauw, Kabel
<b>Kleurconsistentie (SDCM)</b>	SDCM=3
<b>Optics</b>	Lens en louver
<b>Ambient temperature</b>	-20°C / +40°C
<b>Productkleur</b>	On request
<b>Bevestiging</b>	Recessed
<b>Kleurtemperatuur</b>	Tunable White, 2700K, 3000K, 3500K, 4000K
<b>Color Rendering Index (CRI)</b>	CRI90, CRI80
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Family</b>	Evolo
<b>Armatuurefficiëntie</b>	>130lm/W
<b>Verwachte levensduur</b>	L90B50@60,000h (Tq 25°C)
<b>Powerfactor</b>	>0.9
<b>Energielabel</b>	A++

