



FUSION-BM

Fusion-BM is a modular LED luminaire crafted from steel for specific application in exposed grid ceilings. The insert modules are developed as an alternative to T8 and T5 fluorescent luminaires for renovation and new construction projects. Fusion-BM is equipped with microprismatic lens optics featuring low surface luminance (UGR< 19).

- Suitable for use in combination with all common strip grid ceilings
- Architectural appearance
- Equipped with a prismatic lens (UGR < 19) or an opal diffuser<

Downloads

[Photometrics Fusion-BM](#)


Categories: [Strip grid fixtures](#)




PRODUCT IMAGES





Fusion-BM 100x1720 4S (optic 1125 mm)



Fusion-BM 100x1720 5S (optic 1405 mm)

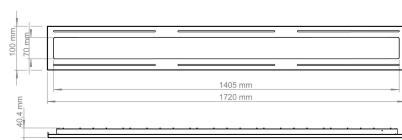

* Other sizes upon request

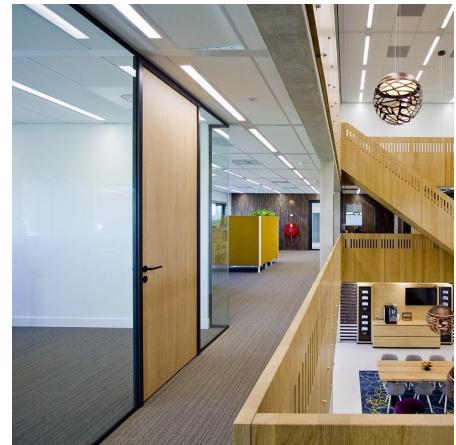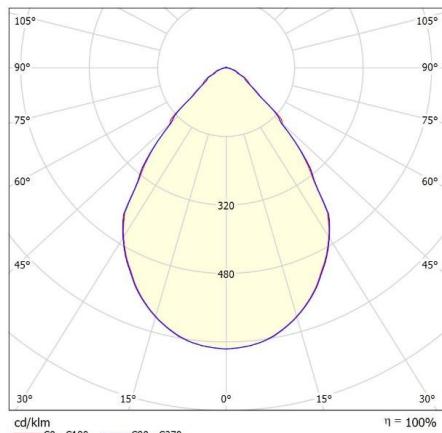

f-waardering volgens UGR

Ruimteafmeting	X	Y	Perspectief dwars t.o.v. lampenpas						Perspectief langs t.o.v. lampenpas					
			2H	3H	4H	5H	8H	12H	2H	3H	4H	5H	8H	12H
p Plafond	70	70	50	50	30	30	70	70	50	50	30	30	70	70
p Muren	50	30	50	30	30	30	50	30	50	30	30	30	30	30
p Vloer	20	20	20	20	20	20	20	20	20	20	20	20	20	20
			17.4	18.4	17.7	18.6	18.8	17.4	18.3	17.7	18.6	18.8	18.8	18.8
			17.8	18.6	18.1	18.9	19.1	17.7	18.6	18.0	18.8	19.1	19.1	19.1
			17.9	18.7	18.3	19.0	19.3	17.9	18.7	18.3	19.0	19.3	19.3	19.3
			18.0	18.8	18.4	19.1	19.4	18.0	18.8	18.6	19.1	19.4	19.4	19.4
			18.1	18.8	18.4	19.1	19.4	18.1	18.7	18.4	19.1	19.4	19.4	19.4
			18.8	18.5	19.1	19.4	18.1	18.7	18.4	19.1	19.1	19.4	19.4	19.4
			19.1	18.9	18.5	19.1	19.4	19.1	18.9	19.0	19.4	19.5	19.5	19.5
			19.2	18.9	18.6	19.2	19.5	19.2	18.9	19.0	19.3	19.6	19.6	19.6
			19.4	18.9	18.7	19.3	19.7	19.5	18.9	18.9	19.3	19.7	19.7	19.7
			19.5	18.9	18.9	19.3	19.7	19.5	18.9	19.0	19.3	19.8	19.8	19.8
			19.6	18.9	18.9	19.3	19.7	19.5	18.9	19.0	19.3	19.8	19.8	19.8
			19.7	18.9	18.9	19.3	19.7	19.5	18.9	19.0	19.3	19.8	19.8	19.8
			19.8	18.9	18.9	19.3	19.7	19.5	18.9	19.0	19.3	19.8	19.8	19.8



Variatie op warmtepasificatie voor lampafstand S

S = 1.0H +1.2 / -1.7
S = 1.5H +2.2 / -2.1
S = 2.0H +3.8 / -2.8

Standaardtabel BK02

Correctie-opticaal 0.6

Gecorrigeerde verbindingsindicatie in relatie tot 3793lm Totale lichtstroom

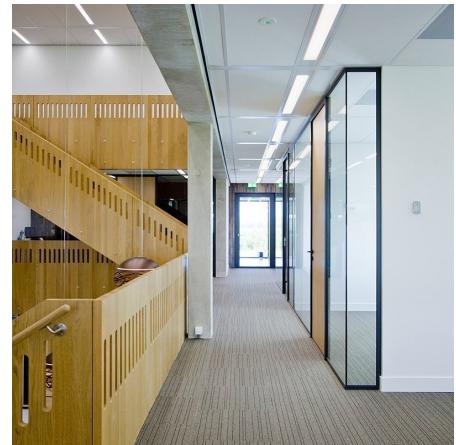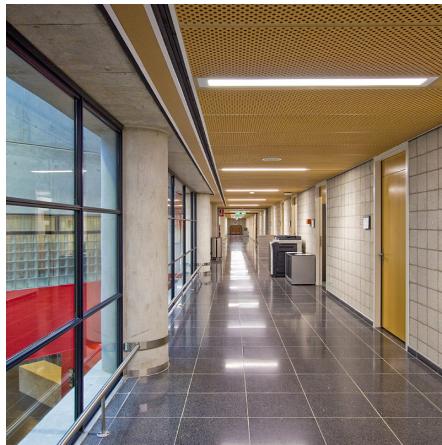

Fusion-BM is a modular LED luminaire crafted from steel for specific application in exposed grid ceilings. The insert modules are developed as an alternative to T8 and T5 fluorescent luminaires for renovation and new construction projects. Fusion-BM is equipped with micoprismatic lens optics featuring low surface luminance (UGR < 19).

- Suitable for use in combination with all common strip grid ceilings
- Architectural appearance
- Equipped with a prismatic lens (UGR < 19) or an opal diffuser

Downloads

[Photometrics Fusion-BM](#)

NOTES

ADDITIONAL INFORMATION

Kleurtemperatuur	Tunable White, 2700K
Driver positie	Attached to the fixture, Loose driver
Light control	1-10V dimming, Casambi dimming, DALI dimming
Producttoepassing	Education, Hospitality, Office, Public spaces
Oriëntatie	Down
Isolatieklasse	Class II
Photobiological safety	IEC 62471: RG1 (low risc)
Kleurconsistentie (SDCM)	SDCM=3
Optics	Microprismatic lens, Opalen diffusor
Ambient temperature	-20°C / +40°C
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Shape	Rectangular
Bevestiging	Recessed
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Family	Fusion
Armatuurefficiëntie	>140lm/W
Energielabel	A++
Material	Acrylic, Aluminium, Steel

