



FUSION-L


Fusion-L is a linear luminaire with a prismatic lens or opal diffuser for use in suspended linear wooden panel ceilings. This allows you to create integrated lighting in completely unique sleek wooden ceiling lines.

- Can be seamlessly integrated into suspended linear wooden panel ceilings
- Architectural appearance of wood look and sleek ceiling lines
- Equipped with a prismatic lens (UGR < 19) or an opal diffuser<

Categories: [Baffle luminaires](#)



PRODUCT IMAGES

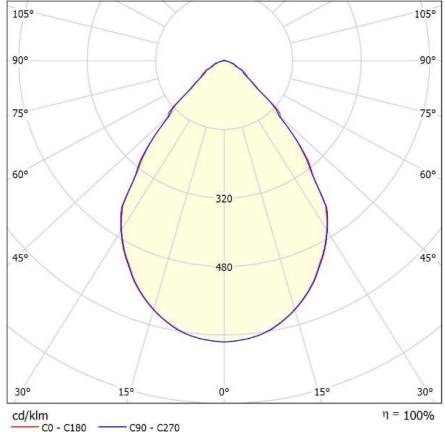



Fusion-L is a linear luminaire with a prismatic lens or opal diffuser for use in suspended linear wooden panel ceilings. This allows you to create integrated lighting in completely unique sleek wooden ceiling lines.

- Can be seamlessly integrated into suspended linear wooden panel ceilings
- Architectural appearance of wood look and sleek ceiling lines
- Equipped with a prismatic lens (UGR < 19) or an opal diffuser<

NOTES

ADDITIONAL INFORMATION

Air extraction	Optional
Armaturefficiëntie	>140lm/W
Bevestiging	pendant
CIE Flux code	93 100 100 100 100
Driver positie	Attached to the fixture, Loose driver
Energielabel	A++
Family	Fusion
Photobiological safety	IEC 62471: RG1 (low risc)
Glare (UGR)	<19
IP-class	IP20 (upwards)/IP40 (downwards)
Isolatieklasse	Class II
Kleurconsistentie (SDCM)	SDCM=3
Kleurtemperatuur	Tunable White, 2700K, 3000K, 3500K, 4000K
Color Rendering Index (CRI)	CRI90, CRI80
Light control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Material	Acrylic, Aluminium, Steel
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Ambient temperature	-20°C / +40°C
Optics	Microprismatic lens, Opalen diffusor
Oriëntatie	Down
Packaging dimensions	Bulk packaging
Powerfactor	>9
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Productkleur	On request
Producttoepassing	Education, Hospitality, Office, Public spaces
Self-adhesive dust cover	Optional
Verpakkingsafmetingen	Bulkverpakking
Verwachte levensduur	L90B50@60,000h (Tq 25°C)
Voltage / frequentie	220-240V, 50 / 60Hz

Shape

Rectangular

PHOTOMETRIC DATA

19.830-P Fusion-L 3S 13W 1750lm 3000K CRI80 G7
19.830-P Fusion-L 3S 15W 2050lm 3000K CRI80 G7
19.830-P Fusion-L 3S 18W 2400lm 3000K CRI80 G7
19.830-P Fusion-L 3S 21W 2750lm 3000K CRI80 G7
19.830-P Fusion-L 3S 24W 3050lm 3000K CRI80 G7
19.830-P Fusion-L 3S 28W 3550lm 3000K CRI80 G7
19.840-P Fusion-L 3S 13W 1900lm 4000K CRI80 G7
19.840-P Fusion-L 3S 15W 2250lm 4000K CRI80 G7
19.840-P Fusion-L 3S 18W 2600lm 4000K CRI80 G7
19.840-P Fusion-L 3S 21W 2950lm 4000K CRI80 G7
19.840-P Fusion-L 3S 24W 3300lm 4000K CRI80 G7
19.840-P Fusion-L 3S 28W 3850lm 4000K CRI80 G7

19.830-P Fusion-L 4S 13W 1750lm 3000K CRI80 G7
19.830-P Fusion-L 4S 15W 2100lm 3000K CRI80 G7
19.830-P Fusion-L 4S 18W 2450lm 3000K CRI80 G7
19.830-P Fusion-L 4S 21W 2750lm 3000K CRI80 G7
19.830-P Fusion-L 4S 23W 3100lm 3000K CRI80 G7
19.830-P Fusion-L 4S 28W 3600lm 3000K CRI80 G7
19.840-P Fusion-L 4S 13W 1900lm 4000K CRI80 G7
19.840-P Fusion-L 4S 15W 2100lm 4000K CRI80 G7
19.840-P Fusion-L 4S 18W 2600lm 4000K CRI80 G7
19.840-P Fusion-L 4S 21W 3000lm 4000K CRI80 G7
19.840-P Fusion-L 4S 23W 3350lm 4000K CRI80 G7
19.840-P Fusion-L 4S 28W 3900lm 4000K CRI80 G7

LDT / PHOTOMETRICS DOWNLOADS

LDT / Photometrics downloads

All downloads can be found centrally per family at
<https://atomis.nl/ldt-photometrics/>