



FUSION-TRACK

Fusion-Track is a surface-mounted luminaire with a track adapter for direct installation on 3-phase tracks. Fusion provides elegant and effective lighting with high light levels. The Fusion-Track optics feature a microprismatic lens with low surface luminance ($UGR < 19$) for uniform and comfortable lighting.

- Easy installation on new or existing tracks
- Architectural appearance
- Equipped with a prismatic lens (UGR 19) or an opal diffuser


Downloads

[Photometrics Fusion Track](#)

Categories: [Track luminaires](#)



PRODUCT IMAGES

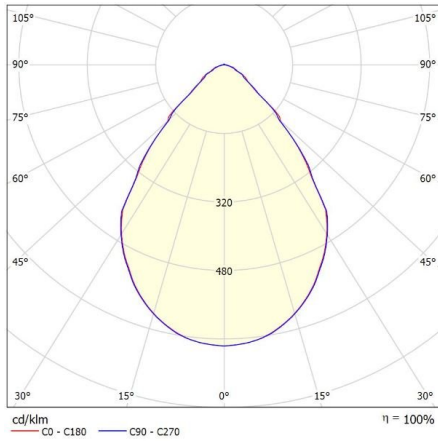

Fusion-Track is a surface-mounted luminaire with a track adapter for direct installation on 3-phase tracks. Fusion provides elegant and effective lighting with high light levels. The Fusion-Track optics feature a microprismatic lens with low surface luminance ($UGR < 19$) for uniform and comfortable lighting.

- Easy installation on new or existing tracks
- Architectural appearance
- Equipped with a prismatic lens ($UGR 19$) or an opal diffuser

Downloads

[Photometrics Fusion Track](#)

NOTES

ADDITIONAL INFORMATION

Air extraction	N/A
Armaturefficiëntie	>140lm/W
Bevestiging	track
CIE Flux code	93 100 100 100 100
Driver positie	Integrated
Energielabel	A++
Family	Fusion
Photobiological safety	IEC 62471: RG1 (low risc)
Glare (UGR)	<19
IP-class	IP20 (upwards)/IP40 (downwards)
Isolatieklasse	Class II
Kleurconsistentie (SDCM)	SDCM=3
Kleurtemperatuur	Tunable White, 2700K, 3000K, 3500K, 4000K
Color Rendering Index (CRI)	CRI90, CRI80
Light control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Luchtafzuiging	n.v.t.
Material	Acrylic, Aluminium, Steel
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Ambient temperature	-20°C / +40°C
Optics	Microprismatic lens, Opalen diffusor
Oriëntatie	Down
Packaging dimensions	Bulk packaging
Powerfactor	>9
Primaire aansluitingen	Fase track
Productkleur	On request
Producttoepassing	Education, Hospitality, Office, Public spaces
Self-adhesive dust cover	Optional
Verpakkingsafmetingen	Bulkverpakking
Verwachte levensduur	L90B50@60,000h (Tq 25°C)
Voltage / frequentie	220-240V, 50 / 60Hz

Shape

Rectangular

Zelfklevende stofkap

Optioneel

PHOTOMETRIC DATA

19.830-P Fusion-T 4S 16 W 2,100 lm 3000 K CRI80 G7 (optic 60×1125 mm)
19.830-P Fusion-T 4S 18 W 2,450 lm 3000 K CRI80 G7 (optic 60×1125 mm)
19.830-P Fusion-T 4S 21 W 2,750 lm 3000 K CRI80 G7 (optic 60×1125 mm)
19.830-P Fusion-T 4S 24 W 3,100 lm 3000 K CRI80 G7 (optic 60×1125 mm)
19.830-P Fusion-T 4S 28 W 3,600 lm 3000 K CRI80 G7 (optic 60×1125 mm)
19.840-P Fusion-T 4S 16 W 2,250 lm 4000 K CRI80 G7 (optic 60×1125 mm)
19.840-P Fusion-T 4S 18 W 2,650 lm 4000 K CRI80 G7 (optic 60×1125 mm)
19.840-P Fusion-T 4S 21 W 3,000 lm 4000 K CRI80 G7 (optic 60×1125 mm)
19.840-P Fusion-T 4S 24 W 3,350 lm 4000 K CRI80 G7 (optic 60×1125 mm)
19.840-P Fusion-T 4S 28 W 3,900 lm 4000 K CRI80 G7 (optic 60×1125 mm)

19.830-P Fusion-T 5S 15 W 2,100 lm 3000 K CRI80 G7 (optic 60×1405 mm)
19.830-P Fusion-T 5S 18 W 2,450 lm 3000 K CRI80 G7 (optic 60×1405 mm)
19.830-P Fusion-T 5S 21 W 2,800 lm 3000 K CRI80 G7 (optic 60×1405 mm)
19.830-P Fusion-T 5S 24 W 3,150 lm 3000 K CRI80 G7 (optic 60×1405 mm)
19.830-P Fusion-T 5S 28 W 3,650 lm 3000 K CRI80 G7 (optic 60×1405 mm)
19.840-P Fusion-T 5S 15 W 2,250 lm 4000 K CRI80 G7 (optic 60×1405 mm)
19.840-P Fusion-T 5S 18 W 2,650 lm 4000 K CRI80 G7 (optic 60×1405 mm)
19.840-P Fusion-T 5S 21 W 3,000 lm 4000 K CRI80 G7 (optic 60×1405 mm)
19.840-P Fusion-T 5S 24 W 3,350 lm 4000 K CRI80 G7 (optic 60×1405 mm)
19.840-P Fusion-T 5S 28 W 3,900 lm 4000 K CRI80 G7 (optic 60×1405 mm)