



FUSION WEC


Fusion WEC is a linear luminaire with a prismatic lens or opal diffuser for use in Interalu WEC® [climate ceilings](#).

- Lightweight construction
- Two lengths available: 1135mm and 1415mm
- With microprismatic lens (UGR < 19 office compliant) or opal diffuser

Categories: [Baffle luminaires](#), [Climate ceiling fixtures](#)



PRODUCT IMAGES

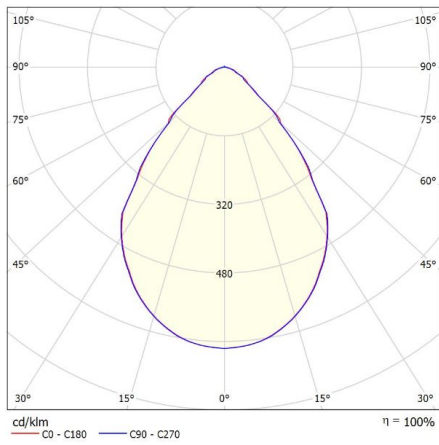

Fusion WEC is a linear luminaire with a prismatic lens or opal diffuser for use in Interalu WEC® [climate ceilings](#).

- Lightweight construction
- Two lengths available: 1135mm and 1415mm
- With microprismatic lens (UGR < 19 office compliant) or opal diffuser

NOTES

ADDITIONAL INFORMATION

Air extraction	N/A
Armaturefficiëntie	>140lm/W
Bevestiging	Recessed
Breedte	70mm
CIE Flux code	93 100 100 100 100
Driver positie	Loose driver
Energielabel	A++
Family	Fusion
Photobiological safety	IEC 62471: RG1 (low risc)
Glare (UGR)	<19
IP-class	IP20 (upwards)/IP40 (downwards)
Isolatieklasse	Class II
Kleurconsistentie (SDCM)	SDCM=3
Kleurtemperatuur	Tunable White, 2700K, 3000K, 3500K, 4000K
Color Rendering Index (CRI)	CRI90, CRI80
Light control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Luchtafzuiging	n.v.t.
Material	Acrylic, Aluminium, Steel
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Ambient temperature	-20°C / +40°C
Optics	Microprismatic lens, Opalen diffusor
Oriëntatie	Down
Packaging dimensions	Bulk packaging
Powerfactor	>9
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Productkleur	On request
Producttoepassing	Education, Hospitality, Office, Public spaces
Self-adhesive dust cover	Optional
Verpakkingsafmetingen	Bulkverpakking

Verwachte levensduur	L90B50@60,000h (Tq 25°C)
Voltage / frequentie	220-240V, 50 / 60Hz
Shape	Rectangular
Zelfklevende stofkap	Optioneel

LDT / PHOTOMETRICS DOWNLOADS

LDT / Photometrics downloads

All downloads can be found centrally per family at

<https://atomis.nl/ldt-photometrics/>