



## LINTERNA-K



Lintera-K is a linear LED fixture with a parabolic batwing louver for use in climate ceilings. The light distribution ensures optimal uniformity at large fixture spacings up to 3 meters.

- Batwing louver design enables large fixture spacings while maintaining good uniformity
- Louvers matte or gloss anodized or UGR < 19 for office use
- C-hook mounting enables easy installation

**Categories:** [Climate ceiling fixtures](#)



## PRODUCT IMAGES

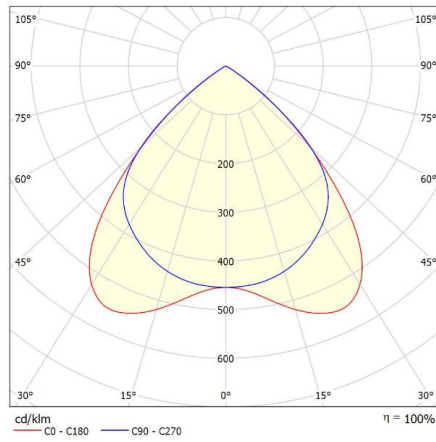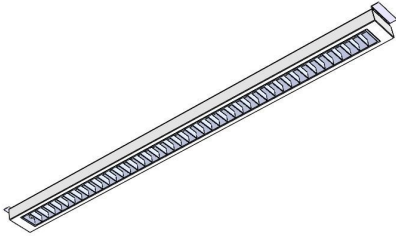

Linterna-K is a linear LED fixture with a parabolic batwing louver for use in climate ceilings. The light distribution ensures optimal uniformity at large fixture spacings up to 3 meters.

- Batwing louver design enables large fixture spacings while maintaining good uniformity
- Louvers matte or gloss anodized or UGR < 19 for office use
- C-hook mounting enables easy installation

**NOTES**

---

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Armaturefficiëntie</b>	>140lm/W
<b>Bevestiging</b>	Recessed
<b>CIE Flux code</b>	93 100 100 100 100
<b>Driver positie</b>	Attached to the fixture, Loose driver
<b>Energielabel</b>	A++
<b>Family</b>	Linterna
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Glare (UGR)</b>	<19
<b>IP-class</b>	IP20 (upwards)/IP40 (downwards)
<b>Isolatieklasse</b>	Class II
<b>Kleurconsistentie (SDCM)</b>	SDCM=3
<b>Kleurtemperatuur</b>	Tunable White, 2700K, 3000K, 3500K, 4000K
<b>Color Rendering Index (CRI)</b>	CRI90, CRI80
<b>Light control</b>	1-10V dimming, Casambi dimming, DALI dimming, Optional
<b>Luchtafzuiging</b>	Optioneel
<b>Material</b>	Steel
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Ambient temperature</b>	-20°C / +40°C
<b>Optics</b>	Parabolic louver
<b>Oriëntatie</b>	Down
<b>Packaging dimensions</b>	Bulk packaging
<b>Powerfactor</b>	>9
<b>Primaire aansluitingen</b>	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
<b>Productkleur</b>	On request
<b>Producttoepassing</b>	Hospitality, Office, Public spaces, Retail
<b>Self-adhesive dust cover</b>	Optional
<b>Verpakkingsafmetingen</b>	Bulkverpakking
<b>Verwachte levensduur</b>	L90B50@60,000h (Tq 25°C)
<b>Shape</b>	Rectangular

**Zelfklevende stofkap**

Optioneel

## PHOTOMETRIC DATA

13.830K.115×920.3S Linterna 9W 1,200lm 3000K CRI80 G8  
 13.830K.115×920.3S Linterna 10W 1,400lm 3000K CRI80 G8  
 13.830K.115×920.3S Linterna 11W 1,600lm 3000K CRI80 G8  
 13.830K.115×920.3S Linterna 13W 1,800lm 3000K CRI80 G8  
 13.830K.115×920.3S Linterna 15W 2,100lm 3000K CRI80 G8  
 13.830K.115×920.3S Linterna 21W 2,800lm 3000K CRI80 G8  
 13.830K.115×920.3S Linterna 24W 3,100lm 3000K CRI80 G8  
 13.830K.115×920.3S Linterna 28W 3,600lm 3000K CRI80 G8

13.830K.115×1200.4S Linterna 13W 1,700lm 3000K CRI80 G8  
 13.830K.115×1200.4S Linterna 14W 1,800lm 3000K CRI80 G8  
 13.830K.115×1200.4S Linterna 15W 2,000lm 3000K CRI80 G8  
 13.830K.115×1200.4S Linterna 18W 2,300lm 3000K CRI80 G8  
 13.830K.115×1200.4S Linterna 21W 2,600lm 3000K CRI80 G8  
 13.830K.115×1200.4S Linterna 28W 3,400lm 3000K CRI80 G8  
 13.830K.115×1200.4S Linterna 32W 3,900lm 3000K CRI80 G8  
 13.830K.115×1200.4S Linterna 38W 4,500lm 3000K CRI80 G8

13.830K.115×1700.5S Linterna 16W 2,100lm 3000K CRI80 G8  
 13.830K.115×1700.5S Linterna 17W 2,300lm 3000K CRI80 G8  
 13.830K.115×1700.5S Linterna 19W 2,500lm 3000K CRI80 G8  
 13.830K.115×1700.5S Linterna 22W 2,900lm 3000K CRI80 G8  
 13.830K.115×1700.5S Linterna 26W 3,300lm 3000K CRI80 G8  
 13.830K.115×1700.5S Linterna 27W 3,400lm 3000K CRI80 G8  
 13.830K.115×1700.5S Linterna 31W 3,900lm 3000K CRI80 G8  
 13.830K.115×1700.5S Linterna 37W 4,500lm 3000K CRI80 G8

13.840K.115×920.3S Linterna 9W 1,300lm 4000K CRI80 G8  
 13.840K.115×920.3S Linterna 10W 1,400lm 4000K CRI80 G8  
 13.840K.115×920.3S Linterna 11W 1,500lm 4000K CRI80 G8  
 13.840K.115×920.3S Linterna 13W 1,800lm 4000K CRI80 G8  
 13.840K.115×920.3S Linterna 15W 2,000lm 4000K CRI80 G8  
 13.840K.115×920.3S Linterna 21W 2,600lm 4000K CRI80 G8  
 13.840K.115×920.3S Linterna 24W 2,900lm 4000K CRI80 G8  
 13.840K.115×920.3S Linterna 28W 3,400lm 4000K CRI80 G8

13.840K.115×1200.4S Linterna 13W 1,800lm 4000K CRI80 G8  
 13.840K.115×1200.4S Linterna 14W 2,000lm 4000K CRI80 G8  
 13.840K.115×1200.4S Linterna 15W 2,100lm 4000K CRI80 G8  
 13.840K.115×1200.4S Linterna 18W 2,500lm 4000K CRI80 G8  
 13.840K.115×1200.4S Linterna 21W 2,800lm 4000K CRI80 G8

13.840K.115×1200.4S Linterna 28W 3,700lm 4000K CRI80 G8  
13.840K.115×1200.4S Linterna 32W 4,200lm 4000K CRI80 G8  
13.840K.115×1200.4S Linterna 38W 4,800lm 4000K CRI80 G8

13.840K.115×1700.5S Linterna 15W 2,100lm 4000K CRI80 G8  
13.840K.115×1700.5S Linterna 17W 2,300lm 4000K CRI80 G8  
13.840K.115×1700.5S Linterna 19W 2,500lm 4000K CRI80 G8  
13.840K.115×1700.5S Linterna 22W 2,900lm 4000K CRI80 G8  
13.840K.115×1700.5S Linterna 26W 3,300lm 4000K CRI80 G8  
13.840K.115×1700.5S Linterna 28W 4,300lm 4000K CRI80 G8  
13.840K.115×1700.5S Linterna 32W 4,900lm 4000K CRI80 G8  
13.840K.115×1700.5S Linterna 38W 5,700lm 4000K CRI80 G8

13.930K.115×920.3S Linterna 9W 1,000lm 3000K CRI90 G8  
13.930K.115×920.3S Linterna 10W 1,100lm 3000K CRI90 G8  
13.930K.115×920.3S Linterna 11W 1,200lm 3000K CRI90 G8  
13.930K.115×920.3S Linterna 13W 1,400lm 3000K CRI90 G8  
13.930K.115×920.3S Linterna 15W 1,600lm 3000K CRI90 G8  
13.930K.115×920.3S Linterna 21W 2,100lm 3000K CRI90 G8  
13.930K.115×920.3S Linterna 24W 2,400lm 3000K CRI90 G8  
13.930K.115×920.3S Linterna 28W 2,700lm 3000K CRI90 G8

13.930K.115×1200.4S Linterna 13W 1,400lm 3000K CRI90 G8  
13.930K.115×1200.4S Linterna 14W 1,500lm 3000K CRI90 G8  
13.930K.115×1200.4S Linterna 15W 1,600lm 3000K CRI90 G8  
13.930K.115×1200.4S Linterna 18W 1,900lm 3000K CRI90 G8  
13.930K.115×1200.4S Linterna 21W 2,100lm 3000K CRI90 G8  
13.930K.115×1200.4S Linterna 28W 2,800lm 3000K CRI90 G8  
13.930K.115×1200.4S Linterna 32W 3,200lm 3000K CRI90 G8  
13.930K.115×1200.4S Linterna 38W 3,700lm 3000K CRI90 G8

13.930K.115×1700.5S Linterna 13W 1,400lm 3000K CRI90 G8  
13.930K.115×1700.5S Linterna 14W 1,500lm 3000K CRI90 G8  
13.930K.115×1700.5S Linterna 15W 1,600lm 3000K CRI90 G8  
13.930K.115×1700.5S Linterna 18W 1,900lm 3000K CRI90 G8  
13.930K.115×1700.5S Linterna 20W 2,200lm 3000K CRI90 G8  
13.930K.115×1700.5S Linterna 27W 2,800lm 3000K CRI90 G8  
13.930K.115×1700.5S Linterna 31W 3,200lm 3000K CRI90 G8  
13.930K.115×1700.5S Linterna 37W 3,700lm 3000K CRI90 G8

13.940K.115×920.3S Linterna 9W 1,100lm 4000K CRI90 G8  
13.940K.115×920.3S Linterna 10W 1,200lm 4000K CRI90 G8  
13.940K.115×920.3S Linterna 11W 1,400lm 4000K CRI90 G8  
13.940K.115×920.3S Linterna 13W 1,600lm 4000K CRI90 G8

13.940K.115×920.3S Linterna 15W 1,800lm 4000K CRI90 G8  
13.940K.115×920.3S Linterna 21W 2,400lm 4000K CRI90 G8  
13.940K.115×920.3S Linterna 24W 2,700lm 4000K CRI90 G8  
13.940K.115×920.3S Linterna 28W 3,100lm 4000K CRI90 G8

13.940K.115×1200.4S Linterna 13W 1,500lm 4000K CRI90 G8  
13.940K.115×1200.4S Linterna 14W 1,700lm 4000K CRI90 G8  
13.940K.115×1200.4S Linterna 15W 1,800lm 4000K CRI90 G8  
13.940K.115×1200.4S Linterna 18W 2,100lm 4000K CRI90 G8  
13.940K.115×1200.4S Linterna 21W 2,400lm 4000K CRI90 G8  
13.940K.115×1200.4S Linterna 28W 3,100lm 4000K CRI90 G8  
13.940K.115×1200.4S Linterna 32W 3,600lm 4000K CRI90 G8  
13.940K.115×1200.4S Linterna 38W 4,100lm 4000K CRI90 G8

13.940K.115×1700.5S Linterna 13W 1,500lm 4000K CRI90 G8  
13.940K.115×1700.5S Linterna 14W 1,700lm 4000K CRI90 G8  
13.940K.115×1700.5S Linterna 15W 1,800lm 4000K CRI90 G8  
13.940K.115×1700.5S Linterna 18W 2,100lm 4000K CRI90 G8  
13.940K.115×1700.5S Linterna 20W 2,400lm 4000K CRI90 G8  
13.940K.115×1700.5S Linterna 27W 3,200lm 4000K CRI90 G8  
13.940K.115×1700.5S Linterna 31W 3,600lm 4000K CRI90 G8  
13.940K.115×1700.5S Linterna 37W 4,200lm 4000K CRI90 G8

## LDT / PHOTOMETRICS DOWNLOADS

### LDT / Photometrics downloads

All downloads can be found centrally per family at  
<https://atomis.nl/ldt-photometrics/>