



LINTERNA-K

Linterna-K is a linear LED fixture with a parabolic batwing louver for use in climate ceilings. The light distribution ensures optimal uniformity at large fixture spacings up to 3 meters.

- Batwing louver design enables large fixture spacings while maintaining good uniformity
- Louvers matte or gloss anodized or UGR< 19 for office use
- C-hook mounting enables easy installation




Downloads

[Photometrics Linterna](#)


Categories: [Climate ceiling fixtures](#)



PRODUCT IMAGES

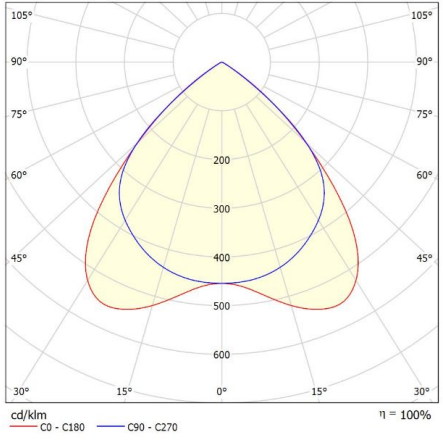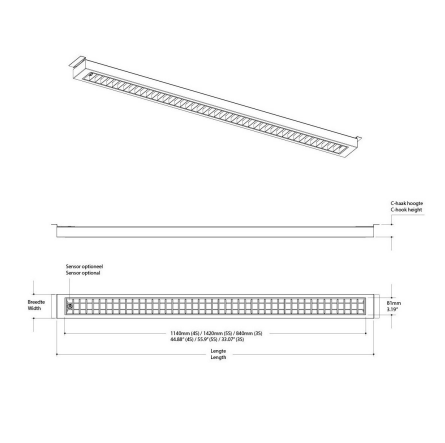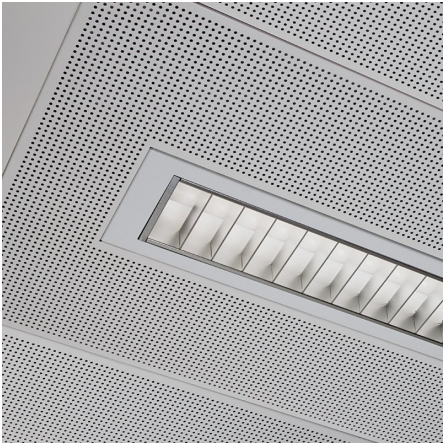

f-waardering volgens UGR												
p Plafond		70	70	50	50	30	70	70	50	50	30	
p Muren		50	30	50	30	20	50	30	50	30	20	
p Vloer		20	20	20	20	20	20	20	20	20	20	
Ruimteafmeting		Perspectief dwars t.o.v. lampen					Perspectief langs t.o.v. lampen					
X	Y											
2H	2H	19.2	20.1	19.4	20.3	20.5	18.8	19.8	19.1	20.0	20.2	
	3H	19.0	19.9	19.3	20.1	20.4	18.7	19.5	19.0	19.8	20.0	
	4H	18.9	19.7	19.3	20.0	20.3	18.6	19.4	18.9	19.6	19.9	
	6H	18.9	19.6	19.2	19.9	20.2	18.5	19.2	18.9	19.5	19.8	
	8H	18.8	19.5	19.2	19.8	20.1	18.5	19.2	18.8	19.5	19.8	
4H	12H	18.8	19.5	19.2	19.8	20.1	18.4	19.1	18.8	19.4	19.7	
	2H	19.0	19.8	19.3	20.1	20.4	18.7	19.5	19.0	19.7	20.0	
	3H	18.9	19.6	19.3	19.9	20.2	18.5	19.2	18.9	19.5	19.8	
	4H	18.8	19.4	19.2	19.7	20.1	18.5	19.0	18.9	19.4	19.7	
	6H	18.8	19.2	19.2	19.6	20.0	18.4	18.9	18.8	19.3	19.6	
6H	8H	18.7	19.2	19.1	19.5	19.9	18.4	18.8	18.8	19.2	19.6	
	12H	18.7	19.1	19.1	19.5	19.9	18.3	18.7	18.8	19.1	19.5	
	8H	4H	18.7	19.2	19.1	19.5	19.9	18.4	18.8	18.8	19.2	19.6
		6H	18.6	19.0	19.1	19.4	19.9	18.3	18.6	18.7	19.1	19.5
		8H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7	19.0	19.5
12H		12H	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	18.9	19.4
		4H	18.7	19.1	19.1	19.5	19.9	18.3	18.7	18.8	19.1	19.5
	6H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7	19.0	19.5	
	8H	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	18.9	19.4	
	Variatie op waarnemerspositie voor lampstanden S											
S = 1.0H		+1.7 / -4.8					+2.3 / -5.6					
S = 1.5H		+3.2 / -14.9					+3.5 / -16.3					
S = 2.0H		+5.2 / -19.8					+5.3 / -21.0					
Standaardrisetel		BK00					BK00					
Correctie-optetel		0.6					0.2					
Geconserveerde verbindingsindicatie in relatie tot 3718lm Totale lichtstroom												

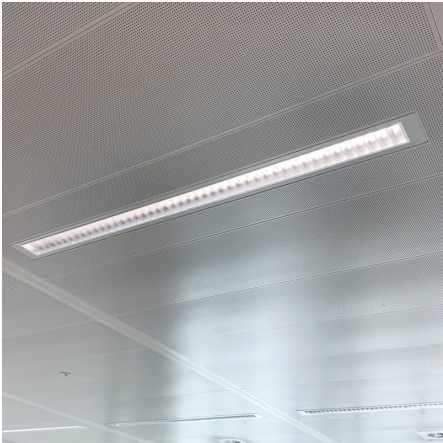



Linterna-K is a linear LED fixture with a parabolic batwing louver for use in climate ceilings. The light distribution ensures optimal uniformity at large fixture spacings up to 3 meters.

- Batwing louver design enables large fixture spacings while maintaining good uniformity
- Louvers matte or gloss anodized or $UGR < 19$ for office use
- C-hook mounting enables easy installation

Downloads

[Photometrics Linterna](#)

NOTES

ADDITIONAL INFORMATION

Family

Linterna

Producttoepassing

Hospitality, Office, Public spaces, Retail

