



MESON PRO 190 TRACK

Meson Pro 190 Track is a series of high-quality track-mounted LED downlights, equipped with a glare-reducing reflector and a satin diffuser. Track-mounted downlight with UGR between 16 and 19 depending on the luminaire current, making it compliant with < EN 12464-1 for office applications. <

- Housing in matte white or matte black
- UGR < 16 to UGR < 19 depending on the luminaire current
- Track mounting on 1- and 3-circuit track systems


Downloads

[Photometrics Meson Pro 190 Track](#)

Categories: [Track luminaires](#)



PRODUCT IMAGES

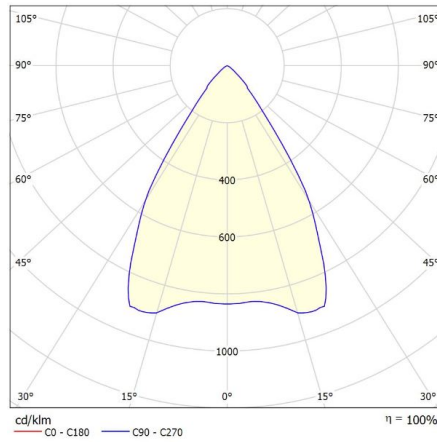

Glare Evaluation According to UGR													
Room Size		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
X	Y	2H	3H	4H	6H	8H	12H	2H	3H	4H	6H	8H	12H
70	70	50	50	30	30	70	70	50	50	30	30	70	70
50	30	50	30	30	30	50	30	50	30	30	30	50	30
20	20	20	20	20	20	20	20	20	20	20	20	20	20
2H	2H	19.0	19.7	19.2	19.9	20.1	19.0	19.7	19.2	19.9	20.1	19.0	19.7
3H	3H	18.9	19.5	19.1	19.7	19.9	18.8	19.5	19.1	19.7	19.9	18.8	19.5
4H	4H	18.8	19.4	19.1	19.6	19.9	18.8	19.4	19.1	19.6	19.9	18.8	19.4
6H	6H	18.7	19.2	19.0	19.5	19.8	18.7	19.2	19.0	19.5	19.8	18.7	19.2
8H	8H	18.6	19.2	19.0	19.5	19.8	18.6	19.2	19.0	19.5	19.8	18.6	19.2
12H	12H	18.6	19.1	19.0	19.4	19.7	18.6	19.1	19.0	19.4	19.7	18.6	19.1
2H	4H	18.8	19.4	19.1	19.6	19.9	18.8	19.4	19.1	19.6	19.9	18.8	19.4
3H	3H	18.6	19.1	19.0	19.4	19.8	18.6	19.1	19.0	19.4	19.8	18.6	19.1
4H	4H	18.6	19.0	18.9	19.3	19.7	18.6	19.0	18.9	19.3	19.7	18.6	19.0
6H	6H	18.5	18.9	18.9	19.2	19.6	18.5	18.9	18.9	19.2	19.6	18.5	18.9
8H	8H	18.5	18.8	18.9	19.2	19.6	18.5	18.8	18.9	19.2	19.6	18.5	18.8
12H	12H	18.4	18.7	18.8	19.1	19.5	18.4	18.7	18.8	19.1	19.5	18.4	18.7
2H	8H	18.5	18.8	18.9	19.2	19.6	18.5	18.8	18.9	19.2	19.6	18.5	18.8
4H	6H	18.4	18.6	18.8	19.0	19.5	18.4	18.6	18.8	19.0	19.5	18.4	18.6
8H	8H	18.3	18.5	18.8	19.0	19.4	18.3	18.5	18.8	19.0	19.4	18.3	18.5
12H	12H	18.3	18.4	18.8	18.9	19.4	18.3	18.4	18.8	18.9	19.4	18.3	18.4
4H	4H	18.4	18.7	18.8	19.1	19.5	18.4	18.7	18.8	19.1	19.5	18.4	18.7
6H	6H	18.3	18.5	18.8	19.0	19.4	18.3	18.5	18.8	19.0	19.4	18.3	18.5
8H	8H	18.3	18.4	18.8	18.9	19.4	18.3	18.4	18.8	18.9	19.4	18.3	18.4

Variation of the observer position for the luminance distances S

S = 1.0H	+5.0 / -8.2	+5.0 / -8.2
S = 1.5H	+7.7 / -13.2	+7.7 / -13.2
S = 2.0H	+9.7 / -33.2	+9.7 / -33.2

Standard table	BK00	BK00
Correction Summand	0.3	0.3

Corrected Glare Indices referring to 2683lm Total Luminous Flux

Meson Pro 190 Track is a series of high-quality track-mounted LED downlights, equipped with a glare-reducing reflector and a satin diffuser. Track-mounted downlight with UGR between 16 and 19 depending on the luminaire current, making it compliant with < EN 12464-1 for office applications. <

- Housing in matte white or matte black
- UGR < 16 to UGR < 19 depending on the luminaire current
- Track mounting on 1- and 3-circuit track systems

Downloads

[Photometrics Meson Pro 190 Track](#)

NOTES

ADDITIONAL INFORMATION

Air extraction	N/A
Armaturefficiëntie	>125lm/W
Bevestiging	track
CIE Flux code	93 100 100 100 100
Driver positie	Integrated
Energielabel	A++
Family	Meson
Photobiological safety	IEC 62471: RG1 (low risc)
Glare (UGR)	<19
IP-class	IP20 (upwards)/IP40 (downwards)
Isolatieklasse	Class II
Kleurconsistentie (SDCM)	SDCM=2
Kleurtemperatuur	Tunable White, 2700K, 3000K, 3500K, 4000K
Color Rendering Index (CRI)	CRI97, CRI90, CRI80
Light control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Luchtafzuiging	n.v.t.
Material	Acrylic, Steel
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Ambient temperature	-20°C / +40°C
Optics	Opalen diffusor, Reflector
Oriëntatie	Down
Packaging dimensions	Bulk packaging
Powerfactor	>9
Primaire aansluitingen	On request, Fase track
Productkleur	On request
Producttoepassing	Education, Hospitality, Office, Public spaces
Self-adhesive dust cover	Optional
Verpakkingsafmetingen	Bulkverpakking
Verwachte levensduur	L90B50@60,000h (Tq 25°C)
Voltage / frequentie	220-240V, 50 / 60Hz

Shape

Round

Zelfklevende stofkap

Optioneel

PHOTOMETRIC DATA

46205.30 Meson pro 190 Track 9W 1100lm 3000K CRI80 UGR16 G7
46205.40 Meson pro 190 Track 9W 1150lm 4000K CRI80 UGR16 G7
46207.30 Meson pro 190 Track 15W 1750lm 3000K CRI80 UGR18 G7
46207.40 Meson pro 190 Track 15W 1800lm 4000K CRI80 UGR18 G7
46216.30 Meson pro 190 Track 20W 2150lm 3000K CRI80 UGR19 G7
46216.40 Meson pro 190 Track 20W 2200lm 4000K CRI80 UGR19 G7
46218.30 Meson pro 190 Track 26W 2700lm 3000K CRI80 UGR19 G7
46218.40 Meson pro 190 Track 26W 2750lm 4000K CRI80 UGR19 G7