



## **MESON PRO 190**


Meson Pro 190 is a range of high-quality LED recessed downlights equipped with a glare-reducing reflector and a satin diffuser.

- High-efficiency LED for enhanced lumen performance
- Trim ring in white, black, or silver
- UGR < 19

**Categories:** [Downlights and recessed spotlights](#)



PRODUCT IMAGES

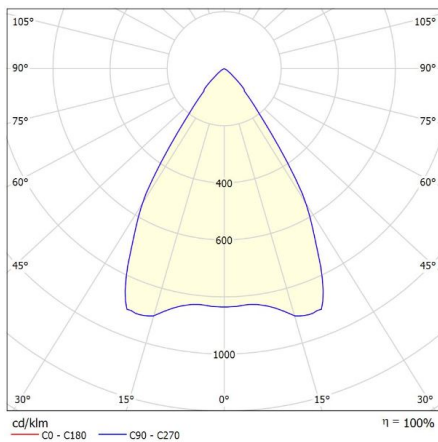

Glare Evaluation According to UGR											
p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	19.0	19.7	19.2	19.9	20.1	19.0	19.7	19.2	19.9	20.1
	3H	18.8	19.5	19.1	19.7	19.9	18.8	19.5	19.1	19.7	19.9
	4H	18.8	19.4	19.1	19.6	19.9	18.8	19.4	19.1	19.6	19.9
	6H	18.7	19.2	19.0	19.5	19.8	18.7	19.2	19.0	19.5	19.8
	8H	18.6	19.2	19.0	19.5	19.8	18.6	19.2	19.0	19.5	19.8
4H	12H	18.6	19.1	19.0	19.4	19.7	18.6	19.1	19.0	19.4	19.7
	2H	18.8	19.4	19.1	19.6	19.9	18.8	19.4	19.1	19.6	19.9
	3H	18.6	19.1	19.0	19.4	19.8	18.6	19.1	19.0	19.4	19.8
	4H	18.6	19.0	18.9	19.3	19.7	18.6	19.0	18.9	19.3	19.7
	6H	18.5	18.9	18.9	19.2	19.6	18.5	18.9	18.9	19.2	19.6
8H	8H	18.5	18.8	18.9	19.2	19.6	18.5	18.8	18.9	19.2	19.6
	12H	18.4	18.7	18.8	19.1	19.5	18.4	18.7	18.8	19.1	19.5
	4H	18.5	18.8	18.9	19.2	19.6	18.5	18.8	18.9	19.2	19.6
	6H	18.4	18.6	18.8	19.0	19.5	18.4	18.6	18.8	19.0	19.5
	8H	18.3	18.5	18.8	19.0	19.4	18.3	18.5	18.8	19.0	19.4
12H	12H	18.3	18.4	18.8	18.9	19.4	18.3	18.4	18.8	18.9	19.4
	4H	18.4	18.7	18.8	19.1	19.5	18.4	18.7	18.8	19.1	19.5
	6H	18.3	18.5	18.8	19.0	19.4	18.3	18.5	18.8	19.0	19.4
8H	18.3	18.4	18.8	18.9	19.4	18.3	18.4	18.8	18.9	19.4	
Variation of the observer position for the luminance distances S											
S = 1.0H		+5.0 / -8.2					+5.0 / -8.2				
S = 1.5H		+7.7 / -13.2					+7.7 / -13.2				
S = 2.0H		+9.7 / -33.2					+9.7 / -33.2				
Standard table		BK00					BK00				
Correction Summand		0.3					0.3				
Corrected Glare Indices referring to 2683lm Total Luminous Flux											

Meson Pro 190 is a range of high-quality LED recessed downlights equipped with a glare-reducing reflector and a satin diffuser.

- High-efficiency LED for enhanced lumen performance
- Trim ring in white, black, or silver
- UGR < 19

**NOTES**

---

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Air extraction</b>	N/A
<b>Armaturefficiëntie</b>	>125lm/W
<b>Bevestiging</b>	ceiling mounting
<b>CIE Flux code</b>	93 100 100 100 100
<b>Driver positie</b>	Loose driver
<b>Energielabel</b>	A++
<b>Family</b>	Meson
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Glare (UGR)</b>	<19
<b>IP-class</b>	IP20 (upwards)/IP40 (downwards)
<b>Isolatieklasse</b>	Class II
<b>Kleurconsistentie (SDCM)</b>	SDCM=2
<b>Kleurtemperatuur</b>	Tunable White, 2700K, 3000K, 3500K, 4000K
<b>Color Rendering Index (CRI)</b>	CRI97, CRI90, CRI80
<b>Light control</b>	1-10V dimming, Casambi dimming, DALI dimming, Optional
<b>Luchtafzuiging</b>	n.v.t.
<b>Material</b>	Acrylic, Steel
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Ambient temperature</b>	-20°C / +40°C
<b>Optics</b>	Opalen diffusor, Reflector
<b>Oriëntatie</b>	Down
<b>Packaging dimensions</b>	Bulk packaging
<b>Powerfactor</b>	>9
<b>Primaire aansluitingen</b>	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
<b>Productkleur</b>	On request
<b>Producttoepassing</b>	Education, Hospitality, Office, Public spaces
<b>Self-adhesive dust cover</b>	Optional
<b>Verpakkingsafmetingen</b>	Bulkverpakking
<b>Verwachte levensduur</b>	L90B50@60,000h (Tq 25°C)

<b>Voltage / frequentie</b>	220-240V, 50 / 60Hz
<b>Shape</b>	Round
<b>Cut-out size</b>	∅170mm
<b>Zelfklevende stofkap</b>	Optioneel

## PHOTOMETRIC DATA

46205.30 Meson pro 190 9W 1100lm 3000K CRI80 UGR16 G7  
46207.30 Meson pro 190 15W 1750lm 3000K CRI80 UGR18 G7  
46216.30 Meson pro 190 20W 2150lm 3000K CRI80 UGR19 G7  
46218.30 Meson pro 190 26W 2700lm 3000K CRI80 UGR19 G7

46205.40 Meson pro 190 9W 1150lm 4000K CRI80 UGR16 G7  
46207.40 Meson pro 190 15W 1800lm 4000K CRI80 UGR18 G7  
46216.40 Meson pro 190 20W 2200lm 4000K CRI80 UGR19 G7  
46218.40 Meson pro 190 26W 2750lm 4000K CRI80 UGR19 G7

## LDT / PHOTOMETRICS DOWNLOADS

### LDT / Photometrics downloads

All downloads can be found centrally per family at  
<https://atomis.nl/ldt-photometrics/>