



## **Meson Round 190 Wallwasher Refit**

Meson round 190 wallwasher Refit is a high-quality LED recessed downlight with asymmetric light distribution. To ensure uniform lighting across the entire surface, the distance to the wall for wallwashers must not exceed 50-60 cm. The central unit can be rotated within the trim ring to adjust the spot direction. Refit versions are identical to the standard Meson versions. However, the trim ring is larger, not Ø190mm but Ø245mm.

- Provides uniform wall lighting
- The central unit can be rotated within the trim ring to adjust the spot direction
- Particularly suitable for retail lighting
- Low-glare lighting
- Wider trim ring: Ø245 mm






### **Downloads**

[Photometrics Meson round 190 wallwasher Refit](#)

**Categories:** [Downlights and recessed spotlights](#)



## PRODUCT IMAGES

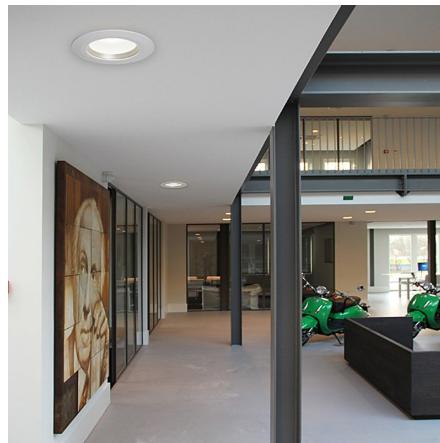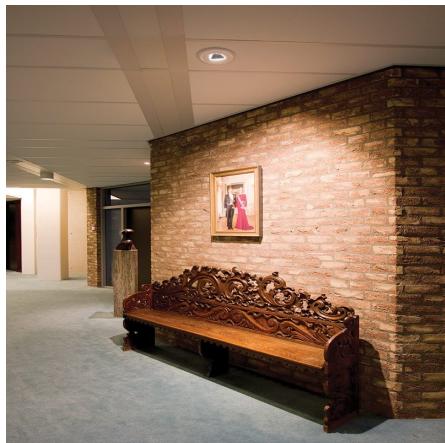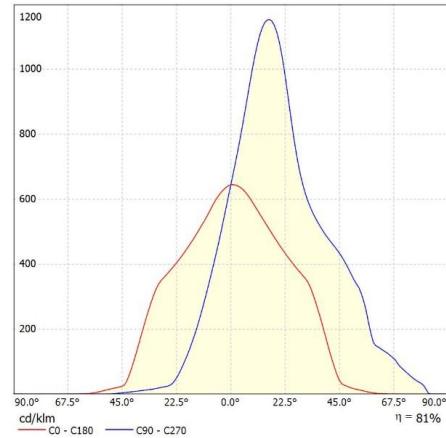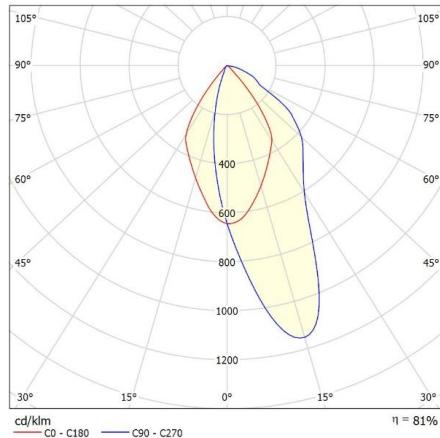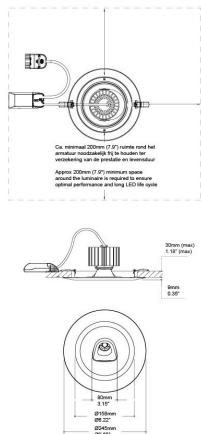

Meson round 190 wallwasher Refit is a high-quality LED recessed downlight with asymmetric light distribution. To ensure uniform lighting across the entire surface, the distance to the wall for wallwashers must not exceed 50-60 cm. The central unit can be rotated within the trim ring to adjust the spot direction. Refit versions are identical to the standard Meson versions. However, the trim ring is larger, not Ø190mm but Ø245mm.

- Provides uniform wall lighting
- The central unit can be rotated within the trim ring to adjust the spot direction
- Particularly suitable for retail lighting

- Low-glare lighting
- Wider trim ring: Ø245 mm

## Downloads

[Photometrics Meson round 190 wallwasher Refit](#)

## **NOTES**

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Isolatieklasse</b>	Class II
<b>Driver positie</b>	Loose driver
<b>Light control</b>	1-10V dimming, Casambi dimming, DALI dimming
<b>Producttoepassing</b>	Education, Hospitality, Office, Public spaces
<b>Oriëntatie</b>	Down
<b>Shape</b>	Round
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Kleurtemperatuur</b>	Tunable White, 2700K
<b>Ambient temperature</b>	-20°C / +40°C
<b>Primaire aansluitingen</b>	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
<b>Productkleur</b>	On request
<b>Bevestiging</b>	Recessed
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Family</b>	Meson
<b>Energielabel</b>	A++
<b>Kleurconsistentie (SDCM)</b>	SDCM=2
<b>Voltage / frequency</b>	220-240V, 50 / 60Hz
<b>Material</b>	Acrylic, Steel
<b>Powerfactor</b>	>0.9

