



MESON ROUND DIRECTABLE REFIT

Meson round directable Refit is an LED recessed spotlight with a powerful LED. The Refit version features a wider trim to cover larger existing ceiling openings. The directable spot unit can be easily adjusted up to 35°. The spot unit is equipped with a Jordan Alunova® reflector with spherical facets, available in 24° or 40° beam.

- Spot adjustable up to 35° vertically and in all directions
- Equipped with a Jordan Alunova® reflector with spherical facets, available in 24° or 40° beam.
- Includes oversized Ø245mm refit trim to cover existing ceiling openings (Ø185 – Ø230mm)
- Wire-spring mounting allows for easy installation in suspended ceilings.




Downloads

[Photometrics Meson round directable refit](#)

Categories: [Downlights and recessed spotlights](#)



PRODUCT IMAGES

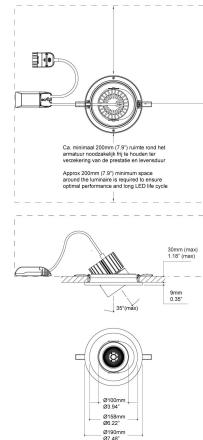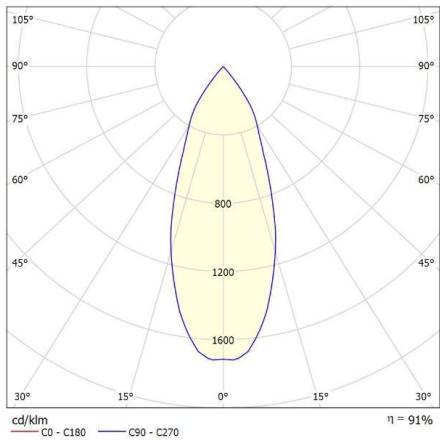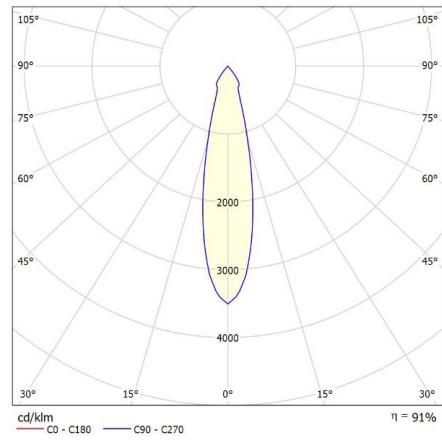

Meson round directable Refit is an LED recessed spotlight with a powerful LED. The Refit version features a wider trim to cover larger existing ceiling openings. The directable spot unit can be easily adjusted up to 35°. The spot unit is equipped with a Jordan Alunova® reflector with spherical facets, available in 24° or 40° beam.

- Spot adjustable up to 35° vertically and in all directions
- Equipped with a Jordan Alunova® reflector with spherical facets, available in 24° or 40° beam.
- Includes oversized Ø245mm refit trim to cover existing ceiling openings (Ø185 - Ø230mm)
- Wire-spring mounting allows for easy installation in suspended ceilings.

Downloads

[Photometrics Meson round directable refit](#)

NOTES

ADDITIONAL INFORMATION

Driver positie	Loose driver
Light control	1-10V dimming, Casambi dimming, DALI dimming
Producttoepassing	Education, Hospitality, Office, Public spaces
Oriëntatie	Down
Isolatieklasse	Class II
Kleurtemperatuur	Tunable White, 2700K, 3000K, 3500K, 4000K
Ambient temperature	-20°C / +40°C
Material	Acrylic, Steel
Productkleur	On request
Bevestiging	Recessed
Photobiological safety	IEC 62471: RG1 (low risc)
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Shape	Round
Family	Meson
Armatuurefficiëntie	>125lm/W
Energielabel	A++
Kleurconsistentie (SDCM)	SDCM=2
Voltage / frequency	220-240V, 50 / 60Hz
Powerfactor	>0.9

